



Deseen International STAINLESS HARDWARE

US TYPE DEE SHACKLE G210

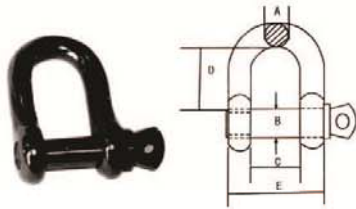


SIZE	A	B	C	D	E
3/16	5	6	10	19	20
1/4	6	8	13	22	25
5/16	8	10	14	26	30
3/8	10	12	17	32	37
7/16	11	12	18	36	40
1/2	12	14	21	41	45
5/8	16	18	27	51	59
3/4	20	22	32	60	72
7/8	22	25	37	71	81
1	25	28	43	81	93
1-1/8	28	30	46	90	102
1-1/4	32	36	51	100	115

DEE SHACKLE

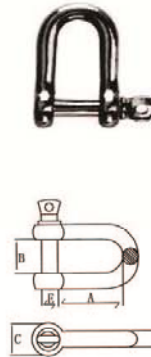


SIZE	A		B		C		D		E		W.L.L.	
mm	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis
4	16	14	8	8	8	8	4	4	4	4	80	50
5	20	16	10	10	10	10	5	5	5	5	100	80
6	24	22	12	12	12	12	6	6	6	6	200	100
8	32	27	16	16	16	16	8	8	8	8	320	200
10	40	31	20	20	20	20	10	10	10	10	520	320
12	48	40	24	24	24	24	12	12	12	12	800	520
14	56	46	28	28	28	28	14	14	14	14	1100	700
16	64	52	32	32	32	32	16	16	16	16	1500	800
18	72	58	36	36	36	36	18	18	18	18	2100	990
20	76	64	40	40	40	40	20	20	20	20	3000	1100
22	88	75	44	44	44	44	22	22	22	22	3500	1500
25	100	83	50	50	50	50	25	25	25	25	5000	2100
28	112	96	56	56	56	56	28	28	28	28	7000	3000
32	128	114	64	64	64	64	32	32	32	32	8000	3500
36	144	116	72	72	72	72	36	36	36	36	--	4600
38	152	152	76	76	76	76	38	38	38	38	--	5000

US TYPE BOW SHACKLE G209

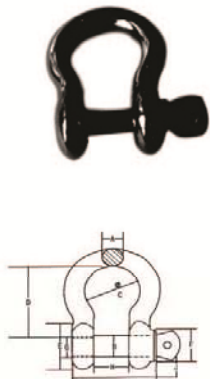

SIZE	A	B	C	D	E	F	G	H	I	J
3/16	5	6	16	22	13	9.5	6	2	5	
1/4	6	8	20	28	15.5	11.5	8	2.5	6	
5/16	8	10	21	30	19	13.5	10	3	8	
3/8	10	12	26	32	23	16	12	3.5	10	
7/16	11	12	29	42	27	16.5	12	3.5	11	
1/2	12	14	33	47	30	21.5	14	4.5	12	
5/8	16	18	43	60	38	27	18	5.5	16	
3/4	20	22	51	71	46	30	22	6	20	
7/8	22	25	58	83	53	34	24	6	22	
1	25	28	68	95	60	36	27	6.5	25	
1-1/8	28	30	74	107	68	40	30	6.5	28	
9/16	14	16	38	53	34	24	16	5	14	

BOW SHACKLE

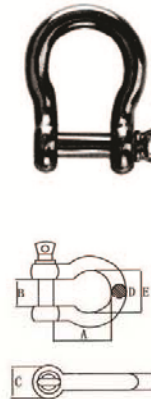


SIZE	A		B		C		D		E		W.L.L.	
mm	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis	Eu	Jis
4	16	16	8	8	8	8	4	4	12	14	80	50
5	20	19	10	10	10	10	5	5	15	16	100	80
6	24	25	12	12	12	12	6	6	18	20	200	100
8	32	32	16	16	16	16	8	8	24	24	320	200
10	40	38	20	20	20	20	10	10	30	28	520	320
12	48	48	24	24	24	24	12	12	36	36	800	520
14	56	50	28	28	28	28	14	14	42	38	1100	700
16	64	55	32	32	32	32	16	16	48	40	1500	800
18	72	62	36	36	36	36	18	18	54	43	2100	990
20	76	68	40	40	40	40	20	20	60	46	3000	1100
22	88	82	44	44	44	44	22	22	66	56	3500	1500
25	100	95	50	50	50	50	25	25	75	68	5000	2100
28	112	108	56	56	56	56	28	28	84	74	7000	3000
32	128	120	64	64	64	64	32	32	96	84	8000	3500
36	144	135	72	72	72	72	36	36	108	92	9200	4600
38	152	152	76	76	76	76	38	38	38	38	10000	5000

Deseen International


STAINLESS HARDWARE

US SECURITY BOW SHACKLE G2130. CSXK04BB

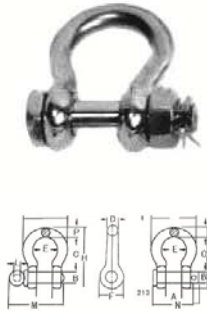


NOMINAL SIZE (in.)	WLL (T) ¹	A	B	C	D	E	F	G	H	L	M	N	P
3/16	1/3	.38	.25	.88	.19	.60	.56	.98	1.47	.16	1.12	--	.19
1/4	1/2	.47	.31	1.13	.25	.78	.61	1.28	1.84	.19	1.38	1.34	.25
5/16	3/4	.53	.38	1.22	.31	.84	.75	1.47	2.09	.22	1.66	1.59	.31
3/8	1	.66	.44	1.44	.38	1.03	.91	1.78	2.49	.25	2.03	1.86	.38
7/16	1-1/2	.75	.50	1.69	.44	1.16	1.06	2.03	2.91	.31	2.38	2.13	.44
1/2	2	.81	.63	1.88	.50	1.31	1.19	2.31	3.28	.38	2.69	2.38	.50
5/8	3-1/4	1.06	.75	2.38	.63	1.69	1.50	2.94	4.19	.44	3.34	2.91	.69
3/4	4-3/4	1.25	.88	2.81	.75	2.00	1.81	3.50	4.97	.50	3.97	3.44	.81
7/8	6-1/2	1.44	1.00	3.31	.88	2.28	2.09	4.03	5.83	.50	4.50	3.81	.97
1	8-1/2	1.69	1.13	3.75	1.00	2.69	2.38	4.69	6.56	.56	5.07	4.53	1.06
1-1/8	9-1/2	1.81	1.25	4.25	1.16	2.91	2.69	5.16	7.47	.63	5.59	5.13	1.25
1-1/4	12	2.03	1.38	4.69	1.29	3.25	3.00	5.75	8.25	.69	6.16	5.50	1.38
1-3/8	13-1/2	2.25	1.50	5.25	1.42	3.63	3.31	6.38	9.16	.75	6.84	6.13	1.50
1-1/2	17	2.38	1.63	5.75	1.54	3.88	3.63	6.88	10.00	.81	7.35	6.50	1.62
1-3/4	25	2.88	2.00	7.00	1.84	5.00	4.19	8.86	12.34	1.00	9.08	7.75	2.25
2	35	3.25	2.25	7.75	2.08	5.75	4.81	9.97	13.68	1.22	10.34	8.75	2.40
2-1/2	55	4.13	2.75	10.50	2.71	7.25	5.69	12.87	17.84	1.38	13.00	--	3.13

US SECURITY DEE SHACKLES G2150. CSXK04BD




SIZE	WLL (T) ¹	A	B	C	D	E	F	G	H	K	L	M	N	P	R
3/16	1/3	.38	.25	.88	.19	.60	.56	--	1.47	--	.98	--	.19	1.29	--
1/4	1/2	.47	.31	1.13	.25	.78	.61	--	1.84	--	1.28	--	.25	1.56	--
5/16	3/4	.53	.38	1.22	.31	.84	.75	--	2.09	--	1.47	--	.31	1.82	--
3/8	1	.66	.44	1.44	.38	1.03	.91	--	2.49	--	1.78	--	.38	2.17	--
7/16	1-1/2	.75	.50	1.69	.44	1.16	1.06	--	2.91	--	2.03	--	.44	2.51	--
1/2	2	.81	.63	1.88	.50	1.31	1.19	1.63	3.28	3.03	2.31	1.81	.50	2.80	.50
5/8	3-1/4	1.06	.75	2.38	.63	1.69	1.50	2.00	4.19	3.75	2.94	2.31	.69	3.53	.63
3/4	4-3/4	1.25	.88	2.81	.75	2.00	1.81	2.38	4.97	4.53	3.50	2.75	.81	4.07	.81
7/8	6-1/2	1.44	1.00	3.31	.88	2.28	2.09	2.81	5.83	5.33	4.03	3.19	.97	4.71	.97
1	8-1/2	1.69	1.13	3.75	1.00	2.69	2.38	3.19	6.56	5.94	4.96	3.69	1.06	5.31	1.00
1-1/8	9-1/2	1.81	1.25	4.25	1.13	2.91	2.69	3.58	7.47	6.78	5.16	4.06	1.25	5.09	1.25
1-1/4	12	2.03	1.38	4.69	1.25	3.25	3.00	3.94	8.25	7.50	5.75	4.53	1.38	6.51	1.38
1-3/8	13-1/2	2.25	1.50	5.25	1.38	3.63	3.31	4.38	9.16	8.28	6.38	5.00	1.50	7.21	1.50
1-1/2	17	2.38	1.63	5.75	1.50	3.88	3.63	4.81	10.00	9.05	6.88	5.38	1.62	7.73	1.62
1-3/4	25	2.88	2.00	7.00	1.75	5.00	4.19	5.75	12.34	10.97	8.86	6.38	2.25	9.05	2.12
2	35	3.25	2.25	7.75	2.00	5.75	4.85	6.75	13.68	12.28	9.97	7.25	2.40	10.41	2.00
2-1/2	55	4.13	2.75	10.50	2.62	7.25	5.69	8.00	17.84	14.84	12.87	9.38	3.13	13.56	2.62
3	85	5.00	3.25	13.00	3.00	7.88	6.50	8.50	21.50	16.88	14.36	11.00	3.62	16.50	3.50

LONG D-SHACKLE LONG TYPE, SS304 OR SS316. CSXK06

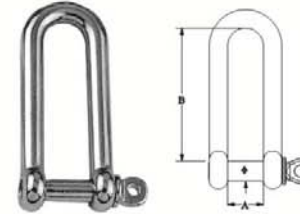

A mm	B mm	L mm	SWL kgs	BL kgs
4.00	8.00	30.00	175	700
5.00	10.00	37.50	313	1250
6.00	12.00	45.00	450	1800
8.00	16.00	60.00	688	2750
10.00	20.00	75.00	813	3250
12.00	24.00	90.00	1600	6400

TWIST SHACKLE, SS304 OR SS316. CSXK05

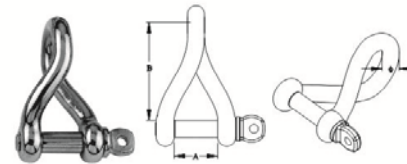


φ mm	A mm	B mm	SWL kgs	BL kgs
4.00	8.00	20.00	167	665
5.00	10.00	25.00	275	1100
6.00	12.00	30.00	400	1600
8.00	16.00	36.00	700	2500
10.00	20.00	41.00	1150	4600
12.00	24.00	54.00	1500	6000

FIXED SNAP SHACKLES(固定弹簧卸扣) CSXK010G



SIZE mm	L mm	A mm	B mm	WLL T
12×52	52	12	9	0.275
16×66	66	16	12	0.500
22×96	96	22	16	0.875

SWIVEL SNAP SHACKLES WITH EYE END(固式旋转弹簧卸扣)

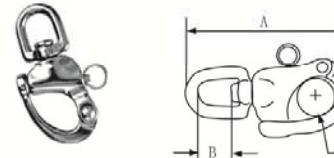

SIZE mm	A mm	B mm	C mm	WLL T
12×70	70	12	12	0.275
16×87	87	12	16	0.500
22×128	120	16	22	0.875


Deseen International STAINLESS HARDWARE

D-SHACKLE (WITH SQUARE HEAD PIN),SS304 OR SS316



SIZE	A mm	B mm	L mm	SWL kgs	BL kgs
4	4.00	8.00	14.00	137.5	550
5	5.00	10.00	17.50	250	1000
6	6.00	12.00	21.00	425	1700
8	8.00	16.00	28.00	625	2500
10	10.00	20.00	35.00	1025	4100
12	12.00	24.00	42.00	1350	5400
16	16.00	32.00	56.00	2200	8800
19	19.00	38.00	66.50	4000	16000
22	22.00	44.00	77.00	4750	19000
25	25.00	50.00	87.50	5250	21000

D-SHACKLE (WITH SLOT SINK PIN),SS304 OR SS316

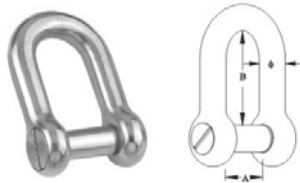


SIZE	A mm	B mm	L mm	SWL kgs	BL kgs
4	4.00	8.00	14.00	138	550
5	5.00	10.00	17.50	250	1000
6	6.00	12.00	21.00	425	1700
8	8.00	16.00	28.00	500	2000
10	10.00	20.00	35.00	625	2500
12	12.00	24.00	42.00	800	3200

D-SHACKLE(WITH HEXAGONAL SOCKET SINK PIN),SS304 OR SS316




SIZE	A mm	B mm	L mm	SWL kgs	BL kgs
5	5.00	10.00	17.50	250	1000
6	6.00	12.00	21.00	425	1700
8	8.00	16.00	28.00	625	2500
10	10.00	20.00	35.00	1025	4100
12	12.00	24.00	42.00	1350	5400
13	13.00	26.00	45.50	1625	6100
14	14.00	28.00	49.00	1525	6500
16	16.00	32.00	56.00	2200	8800
19	19.00	38.00	66.50	4000	16000
22	22.00	44.00	77.00	4750	19000

D-SHACKLE WIDE TYPE,SS304 OR SS316. CSXK11

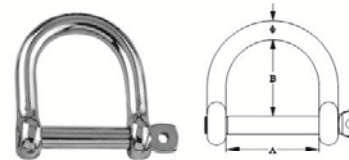

SIZE	A mm	B mm	L mm	SWL kgs	BL kgs
5	5.00	25.00	20.00	186	750
6	6.00	24.00	33.00	338	1350
8	8.00	28.00	31.00	625	2500
10	10.00	40.00	55.00	834	3350
12	12.00	48.00	66.00	1000	4000


ANCHOR(BOW) SHACKLE(WITH SQUARE HEAD PIN),SS304 OR SS316 CSXK13



SIZE	B mm	A mm	C mm	D mm	SWL kgs	BL kgs
4	4.00	8.00	18.00	15.00	138	550
5	5.00	10.00	23.00	17.00	300	1200
6	6.00	12.00	27.00	21.00	425	1700
8	8.00	16.00	37.00	28.00	625	2500
10	10.00	20.00	46.00	35.00	1075	4300
12	12.00	24.00	55.00	42.00	1550	6200
13	13.00	26.00	60.00	45.00	1585	6340
14	14.00	28.00	63.00	50.00	1625	6500
16	16.00	32.00	74.00	56.00	1750	7000
19	19.00	38.00	87.50	66.00	3500	14000
22	22.00	44.00	99.00	76.00	4250	17000
25	25.00	50.00	112.50	87.00	5000	20000
28	28.00	56.00	126.00	98.00	5000	20000


Deseen International STAINLESS HARDWARE

ANCHOR(BOW)SHACKLE(WITH HEXAGONAL SINK PIN),SS304 OR SS316




SIZE	φ mm	A mm	B mm	SWL kgs	BL kgs
M4	4.00	8.00	18.00	138	550
M5	5.00	10.00	23.00	300	1200
M6	6.00	12.00	27.00	425	1700
M8	8.00	16.00	37.00	625	2500
M10	10.00	20.00	46.00	1075	4300
M12	12.00	25.00	55.00	1550	6200
M13	13.00	26.00	60.00	1585	6340
M14	14.00	29.00	57.00	1625	6500
M16	16.00	30.00	74.00	1750	7000
M19	19.00	36.00	87.50	3500	14000
M22	22.00	42.00	99.00	4250	17000
M25	25.00	48.00	112.50	5000	2000
M26	28.00	56.00	126.00	5000	2000

PLATE BOW SHACKLE,SS304 OR SS316 CSXK0701

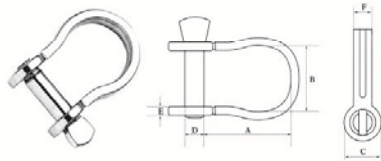


SIZE	D mm	A mm	B mm	E mm	F mm
M4	4	15	9.5	1.5	4.8
M5	5	17	11	2	6.7
M6	6	23	16	3	8
M8	8	31	23	4	8
M10	10	40	25	5	11.5
M12	12	50	28.5	6	14

PLATE DEE SHACKLE,SS304 OR SS316 CSXK0702

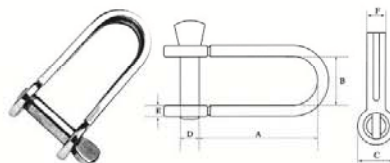


SIZE	D mm	A mm	B mm	C mm	E mm	F mm
M4	4	17	10	9.5	1.5	5.7
M5	5	20	12.5	12	2	7
M6	6	24	15	14.5	3	8
M8	8	44	21	18	4	10

PLATE DEE SHACKLE WITH CROSS BAR,SS304 OR SS316 CSXK0704

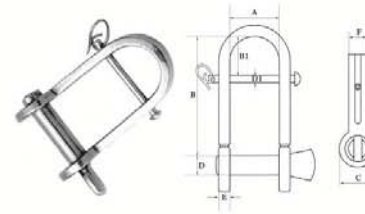


SIZE	D	A	B	BI	C	DI	E	F
M5	5	17	34	8	11	3	3	6.5
M6	6	17	41	10	15	3	3	7.5
M8	8	24	42	12	18.5	3	4	8

PLATE TWIST SHACKLE,SS304 OR SS316 . CSXK0703

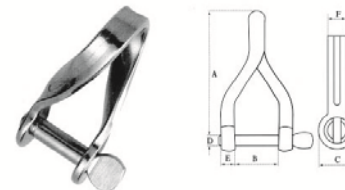

	D	D	A	B	C	E	F	THICKNESS
M5	5	23	12.5	12	2	7	--	
M6	6	36	15	14.5	3	7.5	3	
M8	8	36	18	18.5	4	8	4	


SHACKLE WITH LONGER THREAD

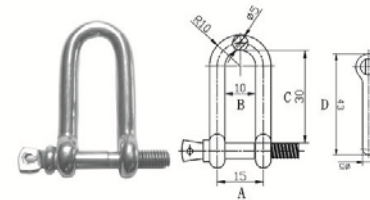

SIZE	φ	A mm	B mm	C mm	D mm
M5	5	15	10	30	43


Deseen International STAINLESS HARDWARE

SNAP SHACKLE WITH CASTING SWIVEL JAW,SS304 OR SS316. CSXK010J

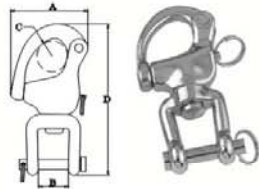


SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
12 x 70	33.00	12.00	12.00	73.00	275	1100
16 x 87	42.00	16.50	16.00	96.50	500	2000
22 x 128	58.00	20.00	22.00	127.00	875	3500

SNAP SHACKLE WITH FORGED SWIVEL JAW,SS304 OR SS316.




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
33.00	14.00	12.00	65.00	275	1100
42.00	13.50	16.00	86.00	500	2000
58.00	24.00	22.00	122.00	875	3500

SWAGE TOGGLE,SS304 OR SS316.

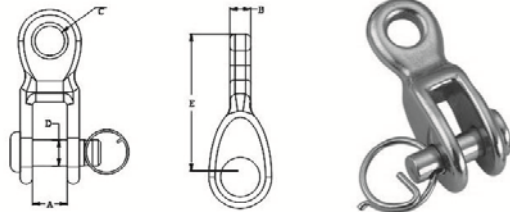


A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
6.00	4.00	5.50	5.00	36.20	250	1000
7.00	5.00	6.60	6.00	40.90	312	1250
10.00	6.00	8.50	8.00	50.00	425	1700
12.00	7.00	10.00	9.00	58.00	775	3100
13.00	9.00	13.00	12.00	78.00	1162	4650
15.00	10.00	15.00	15.00	92.00	1437	5700
17.00	12.00	16.50	16.00	116.00	2037	8100



JAW & EYE TURNBUCKLES HG-227,SS304 OR SS316.


THREAD DIA.& TAKE UP (in.)	WORKING LOAD LIMIT (lbs)*	WEIGHT EACH (kg)	DIMENSIONS(in.)															
			A	B	F CLOSED	G	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	V CLOSED	BB				
1/4 x 4	500	0.33	0.25	0.45	1.66	0.64	11.57	7.57	12.28	8.28	0.81	0.34	1.76	4.07				
5/16 x 4-1/2	800	0.52	0.31	0.50	2.02	0.87	13.50	9.00	14.30	9.80	0.95	0.44	2.20	4.58				
3/8 x 6	1200	0.80	0.38	0.53	2.11	0.85	16.91	10.91	17.87	11.87	1.13	0.53	2.48	6.10				
1/2 x 6	2200	1.77	0.50	0.64	3.22	1.07	19.30	13.30	20.48	14.48	1.41	0.71	3.56	6.03				
1/2 x 9	2200	2.25	0.50	0.64	3.20	1.07	25.59	16.59	26.77	17.77	1.41	0.71	3.54	9.36				
1/2 x 12	2200	2.67	0.50	0.64	3.20	1.07	31.59	19.59	32.77	20.77	1.41	0.71	3.54	12.36				
5/8 x 6	3500	2.98	0.63	0.79	3.90	1.32	20.73	14.73	22.27	16.27	1.80	0.88	4.35	6.03				
5/8 x 9	3500	3.72	0.63	0.79	3.89	1.32	27.07	18.07	28.61	19.61	1.80	0.88	4.34	9.39				
5/8 x 12	3500	4.35	0.63	0.79	3.89	1.32	33.07	21.07	34.61	22.61	1.80	0.88	4.34	12.39				
3/4 x 6	5200	4.51	0.75	0.97	4.71	1.52	22.17	16.17	24.09	18.09	2.09	1.00	5.12	6.13				
3/4 x 9	5200	5.56	0.75	0.97	4.68	1.52	28.57	19.57	30.49	21.49	2.09	1.00	5.09	9.59				
3/4 x 12	5200	6.42	0.75	0.97	4.68	1.52	34.57	22.57	36.49	24.49	2.09	1.00	5.09	12.59				
3/4 x 18	5200	8.14	0.75	0.97	4.71	1.52	46.57	28.57	48.49	30.49	2.09	1.00	5.12	18.53				
7/8 x 12	7200	9.10	0.88	1.16	5.50	1.77	35.68	23.68	37.91	25.91	2.38	1.25	5.79	12.16				
7/8 x 18	7200	11.6	0.88	1.16	5.50	1.77	48.15	30.15	50.38	32.38	2.38	1.25	5.79	18.63				
1 x 6	10000	10.0	1.00	1.34	6.09	2.05	25.03	19.03	27.59	21.59	3.00	1.43	6.50	6.18				
1 x 12	10000	13.4	1.00	1.34	6.09	2.05	37.03	25.03	39.59	27.59	3.00	1.43	6.50	12.18				
1 x 18	10000	16.7	1.00	1.34	6.09	2.05	49.03	31.03	51.59	33.59	3.00	1.43	6.50	18.18				
1 x 24	10000	20.6	1.00	1.34	6.06	2.05	61.63	37.63	64.19	40.19	3.00	1.43	6.47	24.84				
1-1/4 x 12	15200	20.9	1.25	1.84	8.09	2.82	40.76	28.76	43.98	31.98	3.59	1.82	8.49	12.06				
1-1/4 x 18	15200	24.8	1.25	1.84	8.09	2.82	52.76	34.76	55.98	37.98	3.59	1.82	8.49	18.06				
1-1/4 x 24	15200	28.8	1.25	1.84	8.09	2.82	65.32	41.32	68.54	44.54	3.59	1.82	8.49	24.62				
1-1/2 x 12	21400	30.6	1.50	2.06	8.93	2.81	42.50	30.50	46.21	34.21	4.09	2.12	9.46	12.32				
1-1/2 x 18	21400	36.0	1.50	2.06	8.93	2.81	54.50	36.50	58.21	40.21	4.09	2.12	9.46	18.32				
1-1/2 x 24	21400	41.5	1.50	2.06	8.93	2.81	67.12	43.12	70.83	46.83	4.09	2.12	9.46	24.94				
1-3/4 x 18	28000	52.1	1.75	2.60	9.36	3.35	55.37	37.37	59.77	41.77	4.65	2.38	9.97	18.37				
1-3/4 x 24	28000	59.7	1.75	2.60	9.36	3.35	67.37	43.37	71.77	47.77	4.65	2.38	9.97	24.37				
2 x 24	37000	89.9	2.00	2.82	11.80	3.74	72.66	48.66	77.95	53.95	5.81	3.69	13.03	24.48				
2-1/2 x 24	60000	158	2.50	3.06	13.26	4.44	76.08	52.08	82.68	58.68	6.49	3.12	13.03	24.60				
2-3/4 x 24	75000	187	2.75	3.89	14.92	4.19	78.05	54.05	85.67	61.67	7.00	3.25	15.09	24.65				

Deseen International STAINLESS HARDWARE

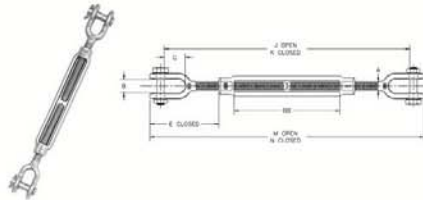


JAW & JAW TURNBUCKLES HG-228, SS304 OR SS316.

THREAD DIA. & TAKE UP (in.)	WORKING LOAD LIMIT (lbs)*	WEIGHT EACH (kg)	DIMENSIONS(in.)								
			A	B	E CLOSED	G	J OPEN	K CLOSED	M OPEN	N CLOSED	BB
1/4 x 4	500	0.37	0.25	0.45	1.66	0.64	11.19	7.19	12.18	8.18	4.07
5/16 x 4-1/2	800	0.56	0.31	0.50	2.02	0.87	13.07	8.57	14.12	9.62	4.58
3/8 x 6	1200	0.85	0.38	0.53	2.11	0.85	16.25	10.25	17.50	11.50	6.10
1/2 x 6	2200	1.82	0.50	0.64	3.22	1.07	18.65	12.65	20.14	14.14	6.03
1/2 x 9	2200	2.29	0.50	0.64	3.20	1.07	29.94	15.94	26.43	17.43	9.36
1/2 x 12	2200	2.71	0.50	0.64	3.20	1.07	30.94	18.94	32.43	20.43	12.36
5/8 x 6	3500	3.21	0.63	0.79	3.90	1.32	19.74	13.74	21.82	15.82	6.03
5/8 x 9	3500	3.95	0.63	0.79	3.89	1.32	26.08	17.08	28.16	19.16	9.39
5/8 x 12	3500	4.58	0.63	0.79	3.89	1.32	32.08	20.08	34.16	22.16	12.39
3/4 x 6	5200	4.80	0.75	0.97	4.71	1.52	21.09	15.09	23.68	17.68	6.13
3/4 x 9	5200	5.85	0.75	0.97	4.68	1.52	27.49	18.49	30.08	21.08	9.59
3/4 x 12	5200	6.72	0.75	0.97	4.68	1.52	33.49	21.49	36.08	24.08	12.59
3/4 x 18	5200	8.45	0.75	0.97	4.71	1.52	45.49	27.49	48.08	30.08	18.53
7/8 x 12	7200	9.37	0.88	1.16	5.50	1.77	34.65	22.65	37.62	25.62	12.16
7/8 x 18	7200	11.8	0.88	1.16	5.50	1.77	47.12	29.12	50.09	32.09	18.63
1 x 6	10000	10.4	1.00	1.34	6.09	2.05	23.82	17.82	27.18	21.18	6.18
1 x 12	10000	13.8	1.00	1.34	6.09	2.05	35.82	23.82	39.18	27.18	12.18
1 x 18	10000	17.1	1.00	1.34	6.09	2.05	47.82	29.82	51.18	33.18	18.18
1 x 24	10000	21.0	1.00	1.34	6.06	2.05	60.42	36.42	63.78	39.78	24.84
1-1/4 x 12	15200	21.9	1.25	1.84	8.09	2.82	39.37	27.37	43.58	31.58	12.06
1-1/4 x 18	15200	25.9	1.25	1.84	8.09	2.82	51.37	33.37	55.68	37.68	18.06
1-1/4 x 24	15200	29.8	1.25	1.84	8.09	2.82	63.93	39.93	68.14	44.14	24.62
1-1/2 x 12	21400	32.6	1.50	2.06	8.93	2.81	40.76	28.76	45.68	33.68	12.32
1-1/2 x 18	21400	38.0	1.50	2.06	8.93	2.81	52.76	34.76	57.68	39.68	18.32
1-1/2 x 24	21400	43.5	1.50	2.06	8.93	2.81	65.38	41.38	70.30	46.30	24.94
1-3/4 x 18	28000	53.5	1.75	2.60	9.36	3.35	53.35	35.35	59.16	41.16	18.37
1-3/4 x 24	28000	61.1	1.75	2.60	9.36	3.35	65.35	41.35	71.16	47.16	24.37
2 x 24	37000	96.3	2.00	2.62	11.80	3.74	69.64	45.64	76.72	52.72	24.48
2-1/2 x 24	60000	167	2.50	3.06	13.26	4.44	72.97	48.97	82.18	58.18	24.60
2-3/4 x 24	75000	199	2.75	3.69	14.92	4.19	74.75	50.75	85.50	61.50	24.65



HOOK & HOOK TURNBUCKLES HG-223, SS304 OR SS316.

THREAD DIAMETER & TAKE UP (mm)	WEIGHT EACH (kg)	DIMENSIONS(mm)								
		A	D	F CLOSED	F	J OPEN	K CLOSED	M OPEN	N CLOSED	BB
6.35 × 102	0.15	6.35	11.2	42.3	32.3	249	187	310	208	103
7.94 × 114	0.24	7.94	12.7	50.7	38.1	294	218	358	243	116
9.53 × 152	0.38	9.53	14.2	57.8	44.7	387	270	453	301	155
12.7 × 152	0.85	12.7	16.5	89.7	57.9	457	335	527	375	153
12.7 × 305	1.26	12.7	16.5	89.2	57.9	769	495	839	535	314
15.9 × 305	1.46	15.9	22.9	108	71.4	495	368	572	419	153
15.9 × 305	2.08	15.9	22.9	107	71.4	809	529	885	580	315
19.1 × 152	1.91	19.1	24.9	129	84.6	538	406	620	467	156
19.1 × 305	3.14	19.1	24.9	128	84.6	853	568	935	630	320
19.1 × 457	3.92	19.1	24.9	129	84.6	1158	721	1240	782	471
22.2 × 305	4.47	22.2	28.7	148	96.0	886	597	972	667	309
25.4 × 305	6.70	25.4	31.8	167	108	929	637	1019	714	309




HOOK & EYE TURNBUCKLES HG-225, SS304 OR SS316.

THREAD DIAMETER &TAKE UP (mm)	WEIGHT EACH (kg)	DIMENSIONS(mm)												
		A	D	E CLOSED	F	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	X CLOSED	BB	
6.35 × 102	0.14	6.35	11.2	42.3	32.3	296	195	312	211	20.6	8.86	44.6	103	
7.94 × 114	0.23	7.94	12.7	50.7	38.1	343	229	363	248	24.1	11.2	55.8	116	
9.53 × 152	0.36	9.53	14.2	57.8	44.7	434	282	458	306	28.7	13.5	62.9	155	
12.7 × 152	0.82	12.7	16.5	89.7	57.9	497	345	528	376	35.8	18.0	90.4	153	
12.7 × 305	1.22	12.7	16.5	89.2	57.9	809	504	840	535	35.8	18.0	89.9	314	
15.9 × 152	1.35	15.9	22.9	108	71.4	536	384	574	422	45.7	22.4	110	153	
15.9 × 305	1.97	15.9	22.9	107	71.4	850	545	888	583	45.7	22.4	110	315	
19.1 × 152	1.91	19.1	24.9	129	84.6	574	422	621	469	53.1	25.4	130	156	
19.1 × 305	2.96	19.1	24.9	128	84.6	889	584	936	631	53.1	25.4	129	320	
19.1 × 457	3.74	19.1	24.9	129	84.6	1194	737	1241	784	53.1	25.4	130	471	
22.2 × 305	4.24	22.2	28.7	148	96.0	917	612	971	666	60.5	31.8	147	309	
25.4 × 305	6.29	25.4	31.8	167	108	956	652	1018	713	76.2	36.3	165	309	

Deseen International


STAINLESS HARDWARE

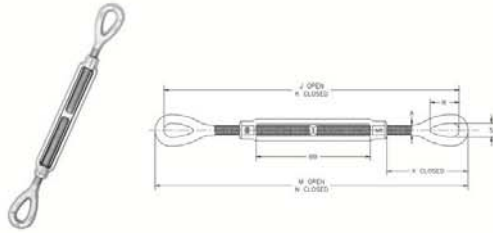

T EYE & EYE TURNBUCKLES HG-226,SS304 OR SS316.


THREAD DIA. & TAKE UP (in.)	WORKING LOAD LIMIT (lbs)†	WEIGHT EACH (kg)	DIMENSIONS(in.)								
			A	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	X CLOSED	BB
1/4 x 4	500	0.29	0.25	11.94	7.94	12.38	8.38	0.81	0.34	1.76	4.07
5/16 x 4-1/2	800	0.48	0.31	13.92	9.42	14.48	9.98	0.95	0.44	2.20	4.56
3/8 x 6	1200	0.75	0.38	17.56	11.56	18.24	12.24	1.13	0.53	2.48	6.10
1/2 x 6	2200	1.72	0.50	19.94	13.94	20.82	14.82	1.41	0.71	3.56	6.03
1/2 x 12	3500	2.63	0.50	32.23	20.23	33.11	21.11	1.41	0.71	3.54	12.36
5/8 x 6	3500	2.75	0.63	21.72	15.72	22.72	16.72	1.80	0.88	4.35	6.03
5/8 x 12	5200	4.12	0.63	34.06	22.06	35.06	23.06	1.80	0.88	4.34	12.39
3/4 x 6	5200	4.22	0.75	23.24	17.24	24.50	18.50	2.09	1.00	5.12	6.13
3/4 x 12	5200	6.12	0.75	35.64	23.64	36.90	24.90	2.09	1.00	5.09	12.59
3/4 x 18	7200	7.83	0.75	47.64	29.64	48.90	30.90	2.09	1.00	5.12	18.53
7/8 x 12	7200	8.83	0.88	36.70	24.70	38.20	26.20	2.38	1.25	5.79	12.16
7/8 x 18	10000	11.5	0.88	49.17	31.17	50.67	32.67	2.38	1.25	5.79	18.63
1 x 6	10000	9.62	1.00	26.24	20.24	28.00	22.00	3.00	1.43	6.50	6.18
1 x 12	10000	13.0	1.00	38.24	26.24	40.00	28.00	3.00	1.43	6.50	12.18
1 x 18	10000	16.3	1.00	50.24	32.24	52.00	34.00	3.00	1.43	6.50	18.18
1 x 24	15200	20.2	1.00	62.84	38.84	64.60	40.60	3.00	1.43	6.47	24.84
1-1/4 x 12	15200	19.9	1.25	42.14	30.14	44.38	32.38	3.59	1.82	8.49	12.06
1-1/4 x 18	15200	23.8	1.25	54.14	36.14	56.38	38.38	3.59	1.82	8.49	18.06
1-1/4 x 24	21400	27.8	1.25	66.70	42.70	68.94	44.94	3.59	1.82	8.49	24.62
1-1/2 x 12	21400	28.7	1.50	44.24	32.24	46.74	34.74	4.09	2.12	9.46	12.32
1-1/2 x 18	21400	34.1	1.50	56.24	38.24	58.74	40.74	4.09	2.12	9.46	18.32
1-1/2 x 24	28000	39.6	1.50	68.86	44.86	71.36	47.36	4.09	2.12	9.46	24.94
1-3/4 x 18	28000	50.7	1.75	57.38	39.38	60.38	42.38	4.65	2.38	9.97	18.37
1-3/4 x 24	28000	58.2	1.75	69.38	45.38	72.38	48.38	4.65	2.38	9.97	24.37
2 x 24	37000	83.5	2.00	75.68	51.68	79.18	55.18	5.81	2.69	13.03	27.48
2-1/2 x 24	60000	149	2.50	79.18	55.18	83.18	59.18	6.49	3.12	13.76	24.60
2-3/4 x 24	75000	174	2.75	81.34	57.34	85.84	61.84	7.00	3.25	15.09	24.65

KOREAN TYPE TURNBUCKLE(韩式开体花兰螺丝) CSHL04EE

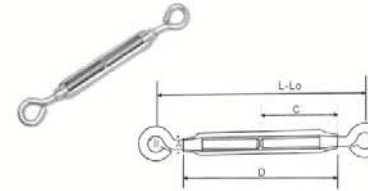


SIZE	A	D	G	H	L	LO
1/4	5.4	11	43	90	124	185
5/16	6.9	14	53	110	154	230
3/8	8.30	17	77.5	160	213	333
1/2	11.10	20	85	175	239	409
5/8	14.20	25	107	220	301	465
3/4	17.20	35	119	242	347	523

EU TYPE TURNBUCKLE(欧式开体花兰螺丝) CSHL03EH

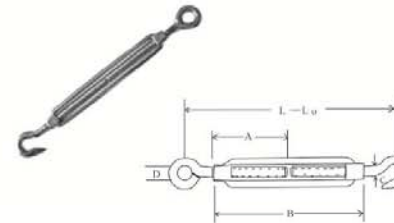

SIZE	A	B	C	D	L	LI	WLL(T)
M4	30	58	5	6.5	80	131	0.025
M5	34	70	6	8	96	146	0.04
M6	44	90	8	10	122	190	0.10
M8	58	120	12	14	164	255	0.20
M10	73	150	13	16	205	325	0.30
M12	97	200	15	18	264	425	0.50
M14	110	225	18	20	300	486	0.70
M16	122	250	20	26	337	548	0.80
M20	147	300	25	30	406	646	1.20


EU CLOSED BODY TURNBUCKLE(欧式封闭花兰螺丝) CSHL03FJ

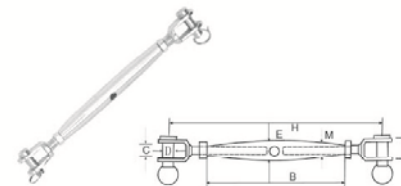

SIZE	M	A	B	C	D	E	H
M5	KJ5	12.5	80	7.5	4.8	8.5	128
M6	6	15	92	9	5.8	10	145
M8	8	17	112	11	7.8	13.5	174
M10	10	20	120	12	9.8	17	204
M12	12	24	150	15	11.8	21	256
M14	14	28	170	18	13.8	23	290
M16	16	32.6	190	21	15.8	27	327
M20	20	37	210	24	19.8	33	380
M22	22	--	--	--	21.8	--	--
M24	24	--	--	--	23.8	--	--
M36	36	69	300	45	35	--	584

Deseen International STAINLESS HARDWARE

TURNBUCKLE DIN1480(SS304 OR SS316) CSHL05HE

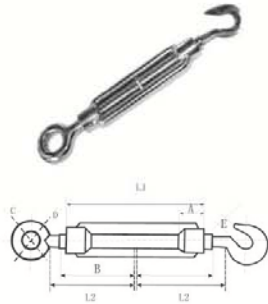


SIZE	L1	L2	m	b	da	di	i	W.L.L
mm	mm	mm	mm	mm	mm	mm	mm	T
M6	110	60	10	53	10	20	4.5	0.200
M8	110	60	14	55	12	26	6.5	0.400
M10	125	65	20	60	14	30.5	8	0.650
M12	125	75	21	70	18	37.5	10.5	0.900
M16	170	100	27	90	22	48	13	1.800
M20	200	115	34	100	25	51	20	2.750
M24	255	140	39	130	28	66	27	3.990
M30	255	145	45	130	35	83	31	6.250
M32	295	160	55	150	36.5	88	33	6.500
M36	295	160	55	150	44	104	40	9.000
M38	330	185	63	170	42	104	39	9.500

TURNBUCKLE,FRAME TYPE(HOOK+HOOK END),SS304 OR SS316. CSHL01HH




SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M4	105.00	61.00	9.00	M4	25	100
M5	125.00	71.00	10.00	M5	32	130
M6	165.00	91.00	11.00	M6	85	350
M8	212.00	121.00	11.50	M8	160	650
M10	269.00	151.00	12.50	M10	200	800
M12	314.00	201.00	17.00	M12	350	1400
M16	397.00	244.00	17.50	M16	600	2400
M20	475.00	295.00	20.00	M20	875	3500

TURNBUCKLE,FRAME TYPE(EYE+EYE END),SS304 OR SS316. CSHL01EE

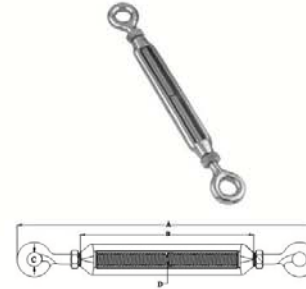


SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M4	105.00	61.00	8.00	M4	119	475
M5	121.50	71.00	10.00	M5	170	680
M6	159.40	91.00	12.00	M6	375	1500
M8	196.50	121.50	14.00	M8	575	2300
M10	250.00	150.00	16.00	M10	775	3100
M12	312.00	200.00	19.00	M12	1100	4400
M16	380.00	244.00	26.00	M16	2025	8100
M20	484.00	295.00	29.00	M20	2750	11000

TURNBUCKLE,FRAME TYPE(HOOK+EYE),SS304 OR SS316.CSHL01HE

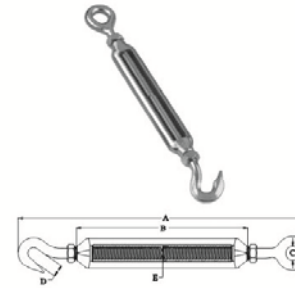

SIZE	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
M4	105.00	61.00	8.00	9.00	M4	25	100
M5	125.00	71.00	10.00	10.00	M5	32	130
M6	165.00	91.00	12.00	11.00	M6	85	350
M8	212.00	121.00	14.00	11.50	M8	160	650
M10	269.00	151.00	16.00	12.50	M10	200	800
M12	314.00	201.00	18.00	17.00	M12	350	1400
M16	397.00	244.00	26.00	17.50	M16	600	2400
M20	475.00	295.00	29.00	20.00	M20	875	3500

TURNBUCKLE,FRAME TYPE WITH NUT(JAW+JAW),SS304 OR SS316.CSHL03KJ

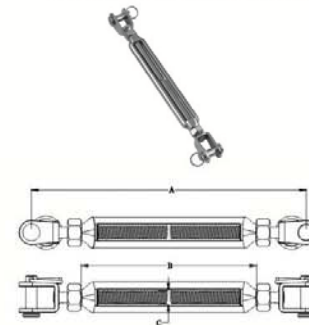


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
M5	125.00	71.00	M5	188	750
M6	136.00	91.00	M6	350	1400
M8	162.00	121.50	M8	550	2200
M10	222.00	150.00	M10	863	3450
M12	295.00	200.00	M12	1250	5000
M14	345.00	225.00	M14	1600	6400
M16	380.00	244.00	M16	2000	8000
M20	465.00	295.00	M20	2625	10500

Deseen International

STAINLESS HARDWARE

BUNDLED TURNBUCKLE (捆绑式花兰螺丝)

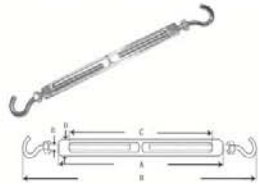


SIZE	A mm	B mm	C mm	D mm	E mm
SA008-06	151	220	127	18.5	6

BUNDLED TURNBUCKLE (捆绑式花兰螺丝)




SIZE	A mm	B mm	C mm	D mm	E mm
SA009-06	112	220	88.6	13	6

RIGGING SCREW JAW&WIRE ROPE TERMINAL MT FORM STAINLESS STEEL




SIZE	D1	WIRE mm	L1 mm	A mm	D mm	H mm	LG mm
6M	M6	3.0	180	7.5	6	10	250
8M	M8	4.0	210	11	8	11	285
10M	M10	5.0	240	12	9	14	330
12M	M12	6.0	300	14	12	20	410
14M	M14	7.0	330	15	12	22	450
16M	M16	8.0	370	17	16	26	510

SWAGE FORK TERMINAL MT FORM STAINLESS STEEL

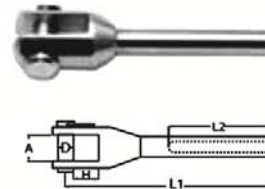


SIZE	WIRE mm	L1 mm	L2 mm	A mm	D mm	H mm	D2 mm
3	3.0	73	39	7.5	6	10	6.5
4	4.0	86	45	11	8	11	7.5
5	5.0	100	52	12	9	14	9.0
6	6.0	128	64	14	12	20	12.5
7	7.0	135	70	15	12	22	14.2
8	8.0	155	80	17	16	26	16.0

RIGGING SCREW BODY STAINLESS STEEL




SIZE	D1	L mm	D2 mm
M5	M5	80	8
M6	M6	95	10
M8	M8	105	13
M10	M10	125	17
M12	M12	150	21
M14	M14	165	21
M16	M16	190	26.5
M20	M20	210	33.5

FORK TERMINAL-EXTERNAL THREAD STAINLESS STEEL

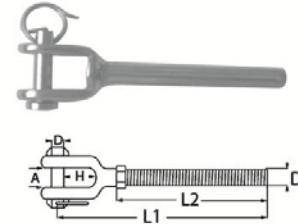

SIZE	D1	L1 mm	L2 mm	A mm	D mm	H mm
0005	M5	65	42	6.5	5	10
0006	M6	72	48	7.5	6	10
0008	M8	86	56	11	8	11
0010	M10	96	63	12	9	14
0012	M12	112	80	14	12	20


EYE TERMINAL-EXTERNAL THREAD STAINLESS STEEL

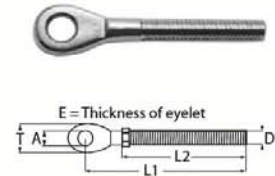

SIZE	D1	L1 mm	L2 mm	E mm	A mm	T mm
0005	M5	60	42	3	5.5	13
0006	M6	66	48	4	6.5	14
0008	M8	78	55	5	8.5	18
0010	M10	91	63	6	10.5	22
0012	M12	112	80	8	13	25


Deseen International STAINLESS HARDWARE

TURNBUCKLE PIPE(WIDE+WIDE TOGGLE),SS304 OR SS316. CSHL07

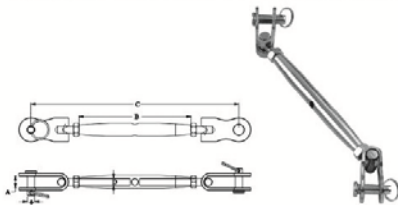


SIZE	φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M6	6.00	10.50	92.00	163.00	M6	275	1100
M8	8.00	11.50	112.00	194.00	M8	450	1800
M10	10.00	15.50	120.00	228.00	M10	750	3000
M12	12.00	19.20	150.00	280.00	M12	938	3750

TURNBUCKLE PIPE(WIDE+WIDE TOGGLE),SS304 OR SS316.

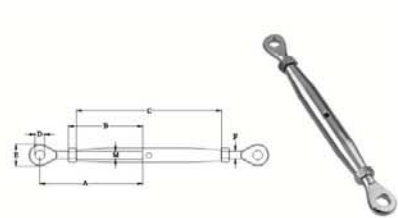


SIZE	A mm	B mm	C mm	D mm	E mm	F mm	M mm	SWL kgs	BL kgs
M5	59.00	43.50	80.00	5.50	12.00	3.00	M5	188	750
M6	61.50	48.00	92.00	6.50	13.50	4.00	M6	250	1000
M8	81.00	60.50	112.00	8.50	17.00	5.00	M8	550	2200
M10	95.00	63.50	120.00	10.50	22.00	6.00	M10	750	3000
M12	110.00	80.00	150.00	13.00	25.00	8.00	M12	1250	5000
M14	125.50	92.50	170.00	13.00	27.40	9.00	M14	1525	6100
M16	132.00	99.00	190.00	14.50	30.00	10.00	M16	2000	8000
M20	169.00	120.00	220.00	19.50	39.00	15.00	M20	2625	10500

RIGGING SCREW JAW/SWAGE STUD,SS304 OR SS316. CYJX02

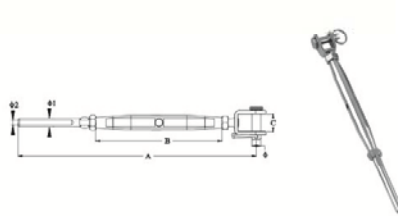


SIZE	φ mm	φ1 mm	φ2 mm	A mm	B mm	C mm	SWL kgs	BL kgs
2.80	5.00	5.50	2.80	155.00	80.00	10.00	150	600
3.50	5.00	6.20	3.50	155.00	82.00	6.80	200	800
3.30	6.00	6.35	3.30	176.00	92.00	10.00	250	1000
4.40	6.00	7.40	4.40	174.00	92.00	10.50	300	1200
4.30	8.00	7.50	4.30	190.00	112.00	11.00	350	1400
5.30	10.00	9.00	5.30	237.00	120.00	15.00	550	2200
6.30	12.00	12.58	6.30	288.00	150.00	17.00	1000	4000
7.30	14.00	14.20	7.30	331.00	170.00	15.00	1350	5400
8.30	16.00	16.00	8.30	372.00	190.00	20.00	1625	6500
10.30	20.00	20.00	10.30	459.00	220.00	30.00	2125	8500

TURNBUCKLE PIPE(WIDE+WIDE TOGGLE),SS304 OR SS316.

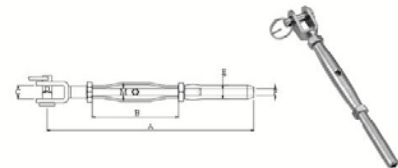


SIZE	A mm	B mm	C mm	D mm	E mm	F mm	G mm
3.20	108.00	50.00	7.00	4.90	6.30	3.20	M5
4.20	133.00	60.00	8.50	5.90	7.50	4.20	M6
5.30	148.00	59.00	11.00	7.90	9.00	5.30	M8
6.40	192.00	80.00	12.00	8.80	12.50	6.40	M10

TURNBUCKLE WITH STUB ENDS,SS304 OR SS316.



SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm
3.00	190.00	80.00	6.30	3.00	5.30	M5

TURNBUCKLE PIPE(JAW+JAW),SS304 OR SS316. CSHL03FJ

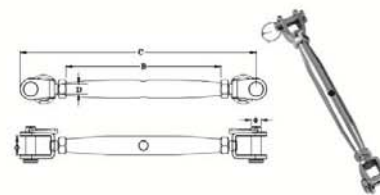


SIZE mm	φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5	5.00	10.50	80.00	125.00	M5	189	750
6	6.00	10.50	92.00	140.00	M6	350	1400
8	8.00	11.50	112.00	170.00	M8	550	2200
10	10.00	15.50	120.00	190.00	M10	865	3450
12	12.00	19.20	150.00	240.00	M12	1250	5000
14	14.00	16.20	170.00	190.00	M14	1600	6400
16	16.00	22.80	190.00	314.00	M16	2000	8000
20	20.00	27.30	220.00	452.00	M20	2625	10500

CABLE PIVOT,SS304 OR SS316.



SIZE mm	A mm	B mm	C mm	D mm	E mm
10.00	190.00	M10	8.00	3.30	20.00
12.00	21.00	M12	9.00	4.00	20.00


CABLE PIVOT,SS304 OR SS316.

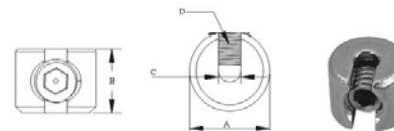

SIZE mm	A mm	B mm	C mm	D mm
4.00	10.00	7.80	2.30	M4
8.00	15.00	12.00	4.30	M8


Deseen International STAINLESS HARDWARE

FORK TERMINAL CAST,SS304 OR SS316. CSJX04



SIZE	A mm	B mm	C mm	D mm	E mm
3.30	16.50	3.30	38.00	72.00	5.80
4.40	21.00	4.40	44.00	91.00	7.80
5.30	25.00	5.30	52.00	104.00	8.90
6.40	28.00	6.40	62.00	130.00	11.90
7.40	30.00	7.40	70.00	140.00	11.90
8.40	36.00	8.40	80.00	150.00	15.90
12.50	45.00	12.50	105.00	220.00	18.90

TOGGLE TERMINAL,SS304 OR SS316. CSJX06

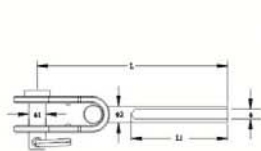


SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
2.20	2.20	5.54	5.00	61.00	100	400
3.30	3.30	6.35	6.00	68.50	167	670
4.30	4.30	7.50	8.00	81.00	350	1400
5.30	5.30	9.10	9.00	95.00	425	1700
6.30	6.30	12.55	12.00	115.00	1000	4000
8.30	8.30	16.00	16.00	164.00	1750	7000
10.50	10.50	17.80	19.50	184.00	1875	7500

DOUBLE THREAD LAG SCREW,SS304 OR SS316.




SIZE	A mm	B mm	C mm	D mm
M6*50	50.00	11.00	37.00	M6
M6*60	60.00	20.00	37.00	M8
M8*80	80.00	30.00	37.00	M8
M8*100	100.00	40.00	47.00	M8
M10*50	50.00	15.00	37.00	M10
M10*60	60.00	20.00	37.00	M10
M10*80	80.00	20.00	47.00	M10
M10*100	100.00	30.00	57.00	M10

LAG SCREW/SWAGE TERMINAL,LEFT OR RIGHT THREAD,SS304 OR SS316.

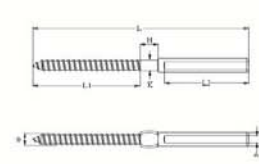


φ mm	A mm	D mm	L mm	L1 mm	L2 mm	K mm	H mm	T
5*2.20	2.70	5.50	86.00	40.00	35.00	4.00	8.00	R
6*2.60	3.30	6.30	97.00	48.00	38.00	5.00	8.00	R
8*3.50	4.30	7.50	115.00	54.00	45.00	6.00	10.00	R
10*4.50	5.30	9.00	128.00	61.00	52.00	7.00	10.00	R
12*5.00	6.30	12.50	162.00	79.00	63.00	10.00	10.00	R
6*2.60	3.30	6.30	97.00	48.00	38.00	5.00	8.00	L
8*3.50	4.30	7.50	115.00	54.00	45.00	6.00	10.00	L

TURNBUCKLE,PIPE(HOOK+EYE),SS304 OR SS316. CSHL03HE

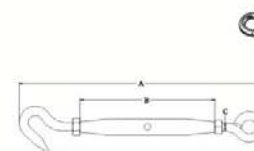


SIZE mm	A mm	B mm	C mm	SWL kgs	BL kgs
M5	134.00	80.00	M5	33	130
M6	163.00	90.00	M6	88	350
M8	191.00	105.00	M8	163	650
M10	233.00	125.00	M10	200	800
M12	267.00	150.00	M12	350	1400
M16	344.00	190.00	M16	600	2400
M20	444.00	210.00	M20	875	3500

TURNBUCKLE,PIPE WITH NUT(SWIVEL TOGGLE+JAW),SS304 OR SS316.



SIZE mm	φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M6	6.00	163.00	92.00	10.50	M6	238	950
M8	8.00	194.00	112.00	11.50	M8	450	1800
M10	10.00	228.00	120.00	15.50	M10	625	2500
M12	12.00	280.00	150.00	19.20	M12	925	3700

TURNBUCKLE,PIPE(SWIVEL TOGGLE+SWAGE TERMINAL),SS304 OR SS316. CSJX03

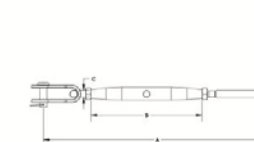


SIZE mm	A mm	B mm	C mm	SWL kgs	BL kgs
M6	181.00	92.00	M6	235	940
M8	207.00	111.00	M8	450	1800
M10	246.00	120.00	M10	645	2500
M12	310.00	151.00	M12	925	3700

Deseen International


STAINLESS HARDWARE

SWAGELESS JAW TERMINAL, SS304 OR SS316. CSJX16

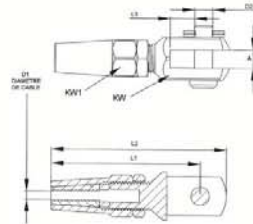


SIZE	DI DIAM WIRE (mm)	A mm	L1 mm	L2 mm	L3 mm	KW mm	KW1 mm	WEIGHT (100 pcs kg)
Φ3	3	6.25	49	57	8	12	14	4.00
Φ4	4	7.90	60.50	71.40	8.30	14	19	8.00
Φ5	5	9.70	69	79	10	16	22	12.00
Φ6	6	11.00	81	93	12	19	27	21.00
Φ8	8	13.00	106	120	15	24	30	37.60
Φ10	10	16.00	119	137	13	32	27	---
Φ12	12	19.00	142	164	15	36	30	---

SWAGELESS THREAD TERMINAL, SS304 OR SS316. CSJX18

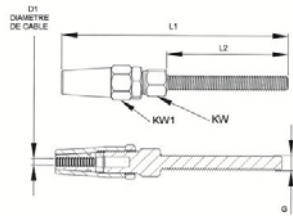


SIZE	DI DIAM WIRE (mm)	G	L1 mm	L2 mm	KW mm	KW1 mm	WEIGHT (100 pcs kg)
Φ3*M5	3	M5	82	41	10	12	3.20
Φ3*M6	3	M6	88	47	10	12	3.60
Φ4*M6	4	M6	96	47	12	14	5.40
Φ4*M8	4	M8	106	56	12	14	6.20
Φ5*M8	5	M8	112	56	14	16	8.40
Φ5*M10	5	M10	118	62	13	16	9.60
Φ6*M10	6	M10	124	62	16	19	13.60
Φ6*M12	6	M12	144	79	16	19	16.40
Φ8*M14	8	M14	168	88	19	24	29.80
Φ8*M16	8	M16	180	99	19	24	33.80

SWAGELESS EYE TERMINAL, SS304 OR SS316. CSJX17

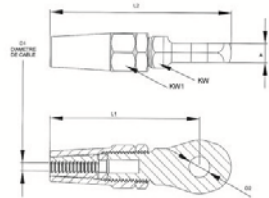


SIZE	DI DIAM WIRE (mm)	A	L1	L2	D2	KW	KW1	WEIGHT (100 pcs kg)
Φ3	3	6	48	57	6	10	12	3.40
Φ4	4	7	56	69	8	14	14	6.20
Φ5	5	8	66	82	10	14	16	8.80
Φ6	6	9	83	100	13	17	19	15.40
Φ8	8	10	102	123	14	19	24	27.80
Φ10	10	12	117	137	16	20	27	---
Φ12	12	14	142	165	20	22	30	---

CABLE ENCASING-TUBE, SS304 OR SS316.

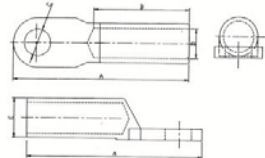


SIZE	A mm	B mm	C mm	D mm	E mm	WT kg
18 x 110	110	60	Φ16.5	Φ18	Φ24	0.16

STUD TERMINAL, SS304 OR SS316. CSJX12

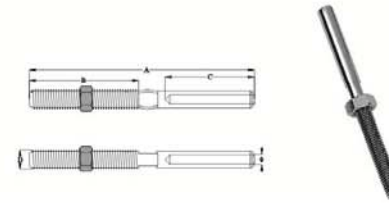


SIZE mm	Φ mm	A mm	B mm	C mm	D mm
2.70	2.70	86.00	40.00	35.00	M5
3.20	3.20	90.00	40.00	40.00	M5
3.30	3.30	97.00	48.00	38.00	M6
4.00	4.00	109.00	49.00	48.00	M6
4.30	4.30	115.00	54.00	45.00	M8
5.30	5.30	128.00	61.00	52.00	M10
6.30	6.30	130.00	63.00	52.00	M10
6.30	6.30	162.00	79.00	63.00	M12
7.30	7.30	178.00	90.00	70.00	M14
8.30	8.30	214.00	102.00	80.00	M16
10.50	10.50	215.00	105.00	90.00	M20
12.50	12.50	260.00	120.00	120.00	M20
14.80	14.80	300.00	140.00	140.00	M20
17.00	17.00	355.00	170.00	160.00	M24
21.00	21.00	425.00	180.00	200.00	M30

EYE TERMINAL FORGED, SS304 OR SS316. CSJX07

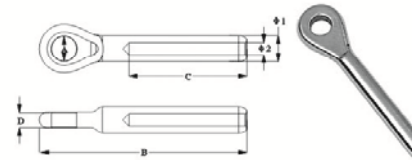

SIZE mm	Φ1 mm	Φ2 mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
2.70	5.53	2.70	5.50	56.00	35.00	3.00	213	850
3.30	6.35	3.30	6.50	63.00	38.00	4.00	250	1000
4.30	7.50	4.30	8.50	77.00	45.00	5.00	338	1350
5.30	9.10	5.30	10.50	87.00	52.00	6.00	625	2500
6.40	12.50	6.40	13.00	107.00	63.00	7.00	1125	4500
8.40	16.00	8.40	14.50	133.00	80.00	10.00	1675	6700
10.50	18.00	10.50	16.30	159.50	100.00	11.00	1950	7800
12.50	21.50	12.50	19.30	180.00	120.00	15.00	2250	9000
14.80	25.00	14.80	23.00	235.50	140.00	20.00	3000	12000

FORK TERMINAL FORGED, SS304 OR SS316. CSJX02

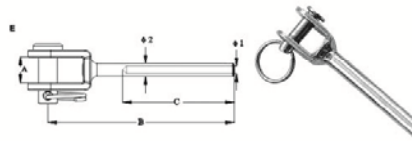

SIZE mm	Φ1 mm	Φ2 mm	A mm	B mm	C mm	SWL kgs	BL kgs
2.70	2.70	5.45	6.50	55.00	24.00	175	700
3.30	3.30	6.35	7.50	65.00	32.00	313	1250
4.20	4.20	7.50	10.00	77.00	40.00	450	1800
5.30	5.30	9.00	12.00	88.00	57.00	663	2650
6.40	6.40	12.50	14.00	106.00	63.00	1000	4000
8.40	8.40	16.10	15.00	145.00	85.00	1450	5800
10.50	10.50	17.80	17.00	150.00	89.00	1800	7200

Deseen International


STAINLESS HARDWARE

DIN741 WIRE ROPE CLIPS(DIN741卡头) CSKT01



SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm
3	9	10	12	4	10	21	16
4	10	10	12	4	10	22	17
5	11	11	13	5	10	23	19
6	13	13	15	5	11	26	23
8	16	16	19	6	15	30	28
10	19	19	22	8	17	34	34
12	20	20	22	8	18	36	36
13	24	24	30	10	21	42	45
14	26	26	30	10	22	44	47
16	29	29	33	12	26	50	51
19	32	32	38	12	30	54	63
22	37	37	44	14	34	61	71
26	41	41	45	14	37	65	81
30	48	48	50	16	43	74	94
34	52	52	55	16	50	80	104
40	58	58	60	16	55	88	124

JIS TYPE WIRE ROPE CLIPS(日式卡头) CSKT02

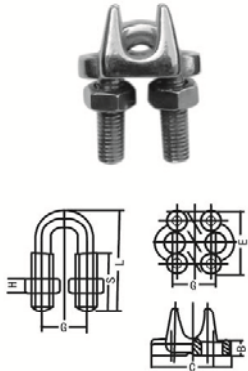


SIZE mm	B mm	C mm	E mm	G mm	H mm	L mm	S mm
3	3.5	15	12	7	3	22	13
4	3.5	17	13	8	3.5	24	15
5	4	20	16	10	3.5	26	16
6	5	25	20	12	4	30	18
8	6	29	24	14	5	35	20
10	6	36	31	18	6.5	40	20
12	7	45	35	22	8	50	28
13	8	51	39	26	10	60	35
14	9	53	45	28	10	65	40
16	10	60	48	32	11	75	45
18	11	62	53	34	11	80	50
20-22	12	78	62	44	15	100	60
24-25	13	86	68	48	16	110	65
26-28	14	94	75	54	18	120	70
30-32	15	98	79	58	18	130	75
33-38	16	120	93	70	22	150	85
40-45	19	136	100	80	24	175	95
47-50	21	150	115	89	26	195	100
56-60	25	170	128	101	29	240	115
63-70	27	190	142	115	31	270	130
73-80	29	212	156	127	34	300	150

US TYPE WIRE ROPE CLIPS(美式模锻卡头) CSKT03



SIZE mm	A inch	B mm	C mm	D mm	E mm	G mm	H mm
1/8	3/16	18	11	12	10	20	23
3/16	1/4	24	14	15	12	23	29
1/4	5/16	26	15	19	16	30	36
5/16	3/8	35	19	22	18	33	43
3/8	7/16	38	19	25	23	41	49
7/16	1/2	47	25	30	26	46	58
1/2	1/2	47	25	30	28	48	58
9/16	9/16	57	32	33	31	52	63
5/8	9/16	60	32	33	34	52	63
3/4	5/8	70	36	38	35	57	72
7/8	3/4	79	41	44	40	62	80
1	3/4	89	46	47	45	66	88
1-1/8	3/4	98	51	51	48	71	91
1-1/4	7/8	108	54	59	56	80	105
1-3/8	7/8	118	59	60	59	80	106
1-1/2	7/8	125	60	66	62	87	113
1-5/8	1	135	60	70	68	92	121
1-3/4	1-1/8	149	70	78	73	95	133
2	1-1/4	165	76	84	86	113	148
2-1/4	1-1/4	181	84	98	97	114	160
2-1/2	1-1/4	197	86	105	108	114	164
2-3/4	1-1/4	211	89	111	127	127	171
3	1-1/2	233	98	121	133	175	192


TYPE MALLEABLE WIRE ROPE CLIPS(美式玛钢型卡头) CSKT04

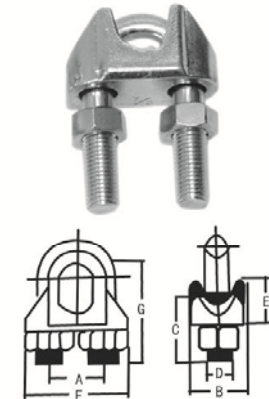

SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm
1/8	11	14	14	3/16-24	10.8	22	20
3/16	13.5	15	16	1/4-20	13	26	24
1/4	17	18.5	20	5/16-18	15	32	31.5
5/16	18.3	20	22	5/16-18	16	35	34
3/8	22.5	22	27	3/8-16	22	40.5	41.8
7/16	24	23	30	3/8-16	22	43	42.8
1/2	27	26	35	7/16-14	3.3	49	53.9
9/16	30	26.5	40	1/2-13	27	52.5	54.7
5/8	33	28.5	40	9/16-12	28	57.5	59.2
3/4	34.5	32	42	9/16-12	34	61	68.7
7/8	41	37	46	5/8-11	38	71	78
1	45.5	42	55	5/8-11	43	77.5	87.5


Deseen International STAINLESS HARDWARE

DUPLEX WIRE ROPE CLIP,SS304. CSKT05

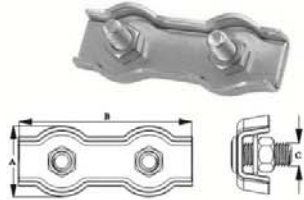


SIZE mm	A mm	B mm	C mm
2	11.50	30.00	M4
3	14.00	34.00	M4
4	18.00	40.00	M5
5	20.00	50.00	M5
6	25.00	60.00	M6
8	30.50	75.00	M8
10	34.50	89.00	M10

SIMPLEX WIRE ROPE CLIP,SS304 OR SS316 . CSKT06




SIZE mm	A mm	B mm	C mm	D mm
2	4.00	11.50	15.00	M4
3	6.00	14.50	18.00	M4
4	8.00	18.50	20.00	M5
5	10.00	20.00	25.00	M5
6	12.00	25.50	30.00	M6
8	18.00	30.50	38.00	M8
10	20.00	34.50	44.50	M10

WIRE ROPE END TERMINATIONS,SS304 OR SS316 . CSKT08

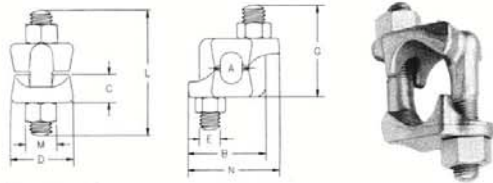


PAGE SIZE (in.)	STD. PACKAGE QTY.	WEIGHT PER100 (lbs.)	DIMENSIONS(in.)									
			A	B	C	D	E	G	L	M	N	
3/16-1/4	100	23	.25	1.25	.34	0.94	.38	1.28	1.63	.69	1.47	
5/16	100	28	.31	1.34	.44	1.06	.38	1.47	1.94	.69	1.56	
3/8	50	40	.38	1.59	.50	1.06	.44	1.81	2.38	.75	1.88	
7/16-1/2	50	62	.50	1.88	.56	1.25	.50	2.19	2.75	.88	2.19	
9/16-5/8	50	103	.63	2.28	.69	1.50	.63	2.69	3.50	1.06	2.63	
3/4	25	175	.75	2.69	.88	1.81	.75	2.94	3.75	1.25	3.06	
7/8	25	225	.88	2.97	.97	2.13	.75	3.31	4.13	1.25	3.14	
1	10	300	1.00	3.06	1.19	2.25	.75	3.72	4.63	1.25	3.53	
1 1/8	10	400	1.13	3.44	1.28	2.38	.88	4.19	5.25	1.44	3.91	
1 1/4	10	400	1.25	3.56	1.34	2.50	.88	4.25	5.25	1.44	4.03	
1 3/8 - 1 1/2	BULK	700	1.50	4.13	1.56	3.00	1.00	5.56	7.00	1.63	4.66	

EU SWIVEL EYE AND EYE,SS304 OR SS316. 欧式旋转环




SIZE	Φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
M4	4.00	11.50	13.00	50.00	113	450
M5	5.00	13.00	14.00	60.00	163	650
M6	6.00	14.50	15.50	66.50	300	1200
M8	8.00	19.50	21.50	90.00	475	1900
M10	10.00	23.50	26.00	112.00	875	3500
M13	13.00	33.00	33.50	148.50	1250	5000
M16	16.00	38.00	42.50	186.00	2125	8500
M20	19.00	40.50	51.00	223.00	2500	10000
M22	22.00	48.50	61.00	258.00	2875	11500
M25	25.00	65.00	73.00	290.00	3250	13000

EU SWIVEL EYE AND JAW,SS304 OR SS316. 欧式旋转环

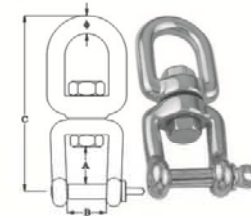

SIZE	Φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
M6	6.00	11.00	12.00	60.00	300	1200
M8	8.00	15.50	16.00	80.00	475	1900
M10	10.00	20.50	20.00	103.00	875	3500
M13	13.00	25.50	26.00	132.00	1250	5000
M16	16.00	36.00	32.00	167.00	2125	8500
M20	19.00	41.00	38.00	199.00	2500	10000

EU SWIVEL JAW AND JAW,SS304 OR SS316. 欧式旋转环




SIZE	Φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
M6	6.00	11.00	12.00	65.00	300	1200
M8	8.00	15.50	16.00	86.50	475	1900
M10	10.00	20.50	20.00	111.00	875	3500
M12	12.00	25.50	26.00	144.50	1250	5000
M16	15.00	36.00	32.00	178.00	2125	8500
M20	19.00	41.00	38.00	213.00	2500	10000

Deseen International


STAINLESS HARDWARE

US TYPE SWIVEL G-401 美式旋转环G-401




SIZE	A inch	B inch	C inch	D inch	E inch	G inch	J inch	M inch	R inch	T inch	U inch	V inch	WLL T
1/4	1.25	.69	.75	.62	1.12	.25	.69	.31	2.25	2.75	1.69	1.25	850
5/16	1.63	.81	1.00	.75	1.38	.31	.81	.38	2.72	3.34	2.06	1.47	1250
3/8	2.00	.94	1.25	1.00	1.75	.38	1.00	.50	3.44	4.19	2.50	1.88	2500
1/2	2.50	1.31	1.50	1.25	2.25	.50	1.31	.63	4.25	5.25	3.19	2.44	3600
5/8	3.00	1.56	1.75	1.50	2.75	.62	1.50	.75	5.13	6.31	3.88	2.94	5200
3/4	3.50	1.75	2.00	1.75	3.25	.75	1.88	.88	5.78	7.22	4.94	3.46	7200

US TYPE SWIVEL G-402 美式旋转环G-402



SIZE	A inch	B inch	C inch	D inch	J inch	M inch	R inch	S inch	T inch	WLL T
1/4	1.25	.69	.75	1.06	.69	.31	2.94	1.69	3.44	850
5/16	1.63	.81	1.00	1.25	.81	.38	3.56	2.06	4.19	1250
3/8	2.00	.94	1.25	1.50	1.00	.50	4.31	2.50	5.06	2250
1/2	2.50	1.31	1.50	2.00	1.31	.63	5.44	3.19	6.44	3600
5/8	3.00	1.56	1.75	2.38	1.50	.75	6.56	3.88	7.81	5200
3/4	3.50	1.75	2.00	2.63	1.88	.88	7.19	4.31	8.69	7200
7/8	4.00	2.06	2.25	3.06	2.13	1.00	8.38	5.00	10.13	10000
1	4.50	2.31	2.50	3.50	2.38	1.13	9.63	5.75	11.63	12500
1 1/4	5.63	2.69	3.13	3.69	3.00	1.38	11.13	6.75	13.36	18000
1 1/2	7.00	4.19	4.00	4.19	4.00	2.25	17.13	10.00	20.13	45200

US TYPE SWIVEL G-403 美式旋转环G-403




SIZE	A inch	B inch	C inch	J inch	K inch	L inch	M inch	N inch	P inch	R inch	T inch	U inch	V inch	WLL T
1/4	1.25	.69	.75	.69	.47	1.03	.31	.88	0.25	2.63	3.38	1.69	1.69	850
5/16	1.63	.81	1.00	.81	.50	1.13	.38	.88	.31	2.94	3.88	2.06	1.81	1250
3/8	2.00	.94	1.25	1.00	.63	1.41	.50	1.06	.38	3.63	4.75	2.50	2.25	2250
1/2	2.50	1.31	1.50	1.31	.75	1.75	.63	1.31	.50	4.50	6.06	3.19	2.88	3600
5/8	3.00	1.56	1.75	1.50	.91	2.06	.75	1.50	.63	5.31	7.31	3.88	3.44	5200
3/4	3.50	1.75	2.00	1.88	1.13	2.53	.88	1.75	.75	6.06	8.31	4.31	4.00	7200
7/8	4.00	2.06	2.25	2.13	1.19	2.75	1.00	2.06	.88	7.00	9.53	5.00	4.53	10000
1	4.50	2.31	2.50	2.38	1.75	3.72	1.13	2.81	1.13	8.56	11.69	5.75	5.94	12500
1 1/4	5.63	2.69	3.13	3.00	2.06	4.31	1.38	2.81	1.38	9.44	13.13	6.75	6.38	18000
1 1/2	7.00	4.19	4.00	4.00	2.88	6.00	2.25	4.44	2.25	14.74	20.84	10.00	10.84	45200

EYE BOLT JIS 1168, CSL501



EYE NUT JIS 1169, CSLM01




SIZE	A mm	B mm	C mm	D mm	E mm	L mm	WLL T
M6	26	14	5.1	6	27.2	13	0.05
M8	32.6	15	6.3	8	33.3	15	0.08
M10	41	20	8	10	41.5	18	0.15
M12	50	24	10	12	51	22	0.22
M14	56	26.5	11.5	14	56	25	0.30
M16	60	29	12.5	16	60	27	0.45
M18	67	31	14.5	18	66	28	0.50
M20	72	33	16	20	71	30	0.63
M22	81	35	18	22	80.5	35	0.80
M24	90	38	20	24	90	38	0.95
M36	126	67	28	36	122	55	2.30
M42	151	80	35.5	42	150.5	65	3.40
M48	170	90	40	48	170	70	4.50
M64	210	110	50	64	210	90	9.00
M80	266	130	63	80	263	105	15.00
M90	302	150	71	90	301	120	18.00
M100	340	170	80	100	335	130	20.00

SIZE	A mm	B mm	C mm	D mm	E mm	L mm	WLL T
M6	26	6	5.1	11	14	11	0.05
M8	32.6	8	6.3	13.2	15	12	0.08
M10	41	10	8	17.5	20	15	0.15
M12	50	12	10	21	24	19	0.22
M14	56	14	11.5	23	26.5	21	0.30
M16	60	16	12.5	25.5	29	23	0.45
M18	67	18	14.5	27.2	31	25	0.50
M20	72	20	16	29	33	28	0.63
M22	81	22	18	31	35	33	0.80
M24	90	24	20	33.4	38	38	0.95


Deseen International STAINLESS HARDWARE

EYE BOLT DIN580,CSL502

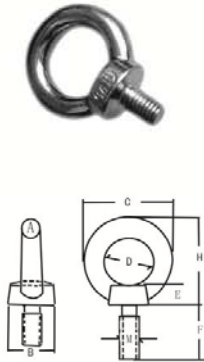


SIZE	A mm	B mm	C mm	D mm	E mm	F mm	H mm	WLL T
M6	6	17	28	16	6	13	25.5	0.07
M8	8	20	36	20	6	15	36	0.14
M10	10	25	45	25	8	18	44.5	0.23
M12	12	30	54	30	10	22	53	0.34
M14	14	35	63	35	12	28	61.5	0.52
M16	14	35	63	35	12	28	61.5	0.70
M20	16	40	72	40	12	30	71	1.20
M22	18	45	81	45	14	35	80.5	1.50
M24	20	50	90	50	16	38	90	1.80
M27	20	50	90	50	18	38	90	2.70
M30	24	65	108	60	20	45	109	3.60
M33	24	65	108	60	22	45	109	4.30
M36	28	75	126	70	22	55	128	5.10
M39	28	75	126	70	26	55	128	6.10
M42	32	85	144	80	30	65	147	7.00
M45	32	85	144	80	30	65	147	8.00
M48	38	100	166	90	35	70	168	8.60
M52	38	100	166	90	35	70	168	9.00

EYE NUT DIN582,CSLM02

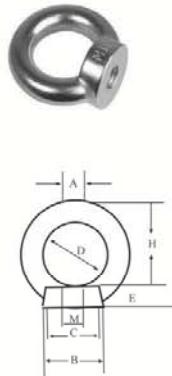


SIZE	A mm	B mm	M mm	D mm	E mm	H mm	WLL T
M6	6	20	6	20	8.5	36	0.07
M8	8	20	8	20	8.5	36	0.14
M10	10	25	10	25	10	44.5	0.23
M12	12	30	12	30	11	53	0.34
M14	14	35	14	35	12	61.5	0.52
M16	14	35	16	35	13	61.5	0.70
M20	16	40	20	40	16	71	1.20
M22	18	45	22	45	18	80.5	1.50
M24	20	50	24	50	20	90	1.80
M27	20	50	27	50	20	90	2.70
M30	24	65	30	60	25	109	3.60
M33	24	65	33	60	25	109	4.30
M36	28	75	36	70	30	128	5.10
M39	28	75	39	70	30	128	6.10
M42	32	85	42	80	35	147	7.00
M46	32	85	46	80	35	147	8.00
M48	38	100	48	90	40	168	8.60
M50	38	100	50	90	40	168	9.90

WING NUT(CAST),SS304 OR SS316. CSLM040C




A mm	B mm	C mm	D mm
50	11	37	M8
60	20	37	M8
80	30	37	M8
100	40	47	M8
50	15	37	M10
60	20	37	M10
80	20	47	M10
100	30	57	M10

WING NUT(LONG TYPE),SS304 OR SS316. CSLM040L

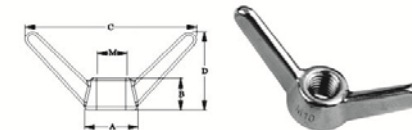

SIZE	A mm	B mm	C mm	D mm	E mm
M8	13.00	9.50	50.00	24.00	M8
M10	19.50	12.00	62.00	30.00	M10
M12	22.50	14.00	72.00	35.00	M12
M16	28.00	16.00	86.50	40.00	M16
M20	35.50	20.00	108.00	50.00	M20
M22	40.00	22.00	119.50	55.00	M22


WIDE WING NUT(LONG TYPE),SS304 OR SS316.



SIZE	A mm	B mm	C mm	D mm	E mm
M10	237.00	80.00	30.00	40.00	M10
M12	237.00	80.00	30.00	40.00	M12
M16	237.00	80.00	30.00	40.00	M16
M20	237.00	80.00	30.00	40.00	M20
M24	237.00	80.00	30.00	40.00	M24


Deseen International STAINLESS HARDWARE

LIFTING EYE BOLT WITH DOUBLE WASHER AND NUT, SS304 OR SS316. CSL501

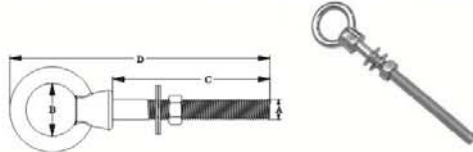


SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
6 × 40	M6	16.00	40.00	71.00	275	1100
6 × 40	M6	16.00	60.00	91.00	275	1100
6 × 80	M6	16.00	80.00	111.00	275	1100
8 × 80	M8	20.00	80.00	120.00	325	1300
8 × 100	M8	20.00	100.00	140.00	325	1300
10 × 100	M10	25.00	100.00	150.00	650	2600
10 × 120	M10	25.00	120.00	170.00	650	2600
12 × 100	M12	30.00	100.00	160.00	850	3400
12 × 120	M12	30.00	120.00	180.00	850	3400
12 × 140	M12	30.00	140.00	200.00	850	3400

EYE BOLT, SS316 (ANY LENGTH OF SCREW AVAILABLE). SS304 OR SS316. CSL501

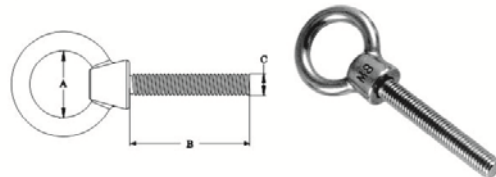


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
M6 × 50	16.00	50.00	M6	275	1100
M8 × 50	20.00	50.00	M8	450	1800
M10 × 50	25.00	50.00	M10	650	2600
M12 × 50	30.00	50.00	M12	850	3400
M16 × 50	35.00	50.00	M16	2000	8000

EYE BOLT (FORGE), SS304 OR SS316.

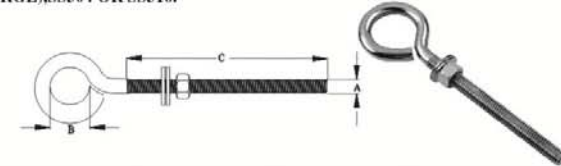

SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
M6 × 40	M6	13.00	40.00	250	1000
M6 × 60	M6	13.00	60.00	250	1000
M6 × 80	M6	13.00	80.00	250	1000
M6 × 100	M6	13.00	100.00	250	1000
M8 × 60	M8	17.00	60.00	450	1800
M8 × 80	M8	17.00	80.00	450	1800
M8 × 100	M8	17.00	100.00	600	2400
M10 × 60	M10	21.00	60.00	600	2400
M10 × 80	M10	21.00	80.00	600	2400
M10 × 100	M10	21.00	100.00	875	3500
M12 × 80	M12	25.00	80.00	875	3500
M12 × 100	M12	25.00	100.00	875	3500
M12 × 120	M12	25.00	120.00	875	3500
M12 × 150	M12	25.00	150.00	875	3500


RING BOLT WITH DOUBLE WASHER AND NUT, SS304 OR SS316.



SIZE	φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M5 × 40	5.00	30.00	40.00	60.00	M5	200	800
M6 × 50	6.00	35.00	50.00	75.00	M6	250	1000
M6 × 60	6.00	35.00	60.00	90.00	M6	250	1000
M8 × 50	8.00	45.00	50.00	85.00	M8	450	1800
M8 × 60	8.00	45.00	60.00	100.00	M8	450	1800
M10 × 50	9.00	50.00	50.00	100.00	M10	600	2400
M10 × 75	9.00	50.00	75.00	120.00	M10	600	2400
M12 × 70	12.00	60.00	70.00	120.00	M12	1000	4000
M12 × 100	12.00	60.00	100.00	150.00	M12	1000	4000
M12 × 120	12.00	60.00	120.00	180.00	M12	1000	4000


Deseen International STAINLESS HARDWARE

WIRE EYE BOLT WITH DOUBLE WASHER AND NUT, SS304 OR SS316. CSLS04

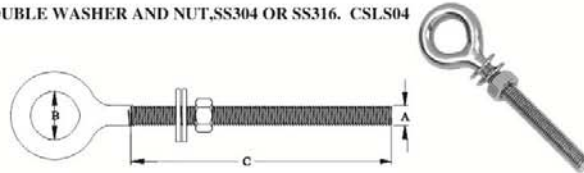


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
M6 × 40	M6	13.00	40.00	250	1000
M6 × 60	M6	13.00	60.00	250	1000
M6 × 80	M6	13.00	80.00	250	1000
M6 × 100	M6	13.00	100.00	250	1000
M8 × 60	M8	17.00	60.00	450	1800
M8 × 80	M8	17.00	80.00	450	1800
M8 × 100	M8	17.00	100.00	600	2400
M10 × 60	M10	21.00	60.00	600	2400
M10 × 80	M10	21.00	80.00	600	2400
M10 × 100	M10	21.00	100.00	875	3500
M12 × 80	M12	25.00	80.00	875	3500
M12 × 100	M12	25.00	100.00	875	3500
M12 × 120	M12	25.00	120.00	875	3500
M12 × 150	M12	25.00	150.00	875	3500

EYE BOLT, SS316 (ANY LENGTH OF SCREW AVAILABLE). CSLS03

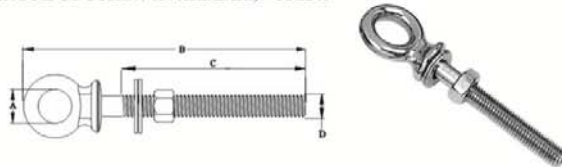

SIZE	A mm	B mm	C mm	D mm
M6 × 34	12.20	70.00	34.00	M6
M6 × 54	12.20	90.00	54.00	M6
M6 × 70	12.20	110.00	70.00	M6
M8 × 70	14.20	113.00	70.00	M8
M8 × 90	16.30	133.00	90.00	M8
M10 × 90	16.30	140.00	90.00	M10
M10 × 110	16.30	160.00	110.00	M10
M12 × 110	18.00	160.00	110.00	M12

WELDED WOODEN THREADED EYE WITH ROUND RING, SS304 OR SS316.

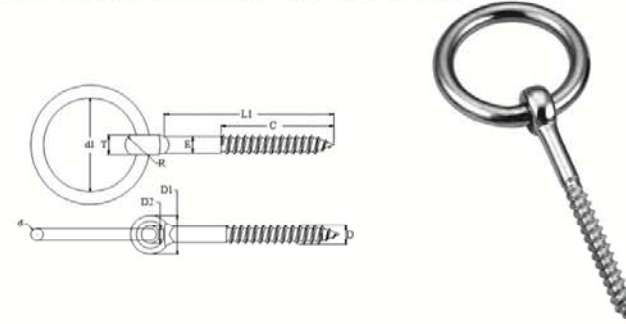

SIZE	D1	D2	L1	C	E	T	R	d	d1
8*3.5	18.00	8.4	60.00	40.00	7.6-8	9.00	5.00	7.00	50.00
4*1.8	8.00	4.2	45.00	30.00	3.6-4	5.00	3.00	4.00	25.00
5*2.2	10.00	5.2	50.00	35.00	4.6-5	6.00	3.50	5.00	30.00
5*2.2	10.00	5.2	60.00	40.00	4.6-5	6.00	3.50	5.00	30.00
6*2.6	14.00	6.3	40.00	30.00	5.6-6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.3	50.00	35.00	5.6-6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.3	55.00	40.00	5.6-6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.3	60.00	40.00	5.6-6	7.00	4.00	6.00	30.00
8*3.5	18.00	8.4	60.00	40.00	7.6-8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.4	75.00	50.00	7.6-8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.4	80.00	55.00	7.6-8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.4	100.00	65.00	7.6-8	9.00	5.00	8.00	50.00
10*4.5	20.00	10.20	75.00	50.00	9.6-10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	80.00	55.00	9.6-10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	85.00	60.00	9.6-10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	100.00	65.00	9.6-10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	120.00	80.00	9.6-10	11.00	6.00	10.00	60.00
12*5.0	24.00	12.10	100.00	65.00	11.6-12	13.00	8.00	12.00	75.00
12*5.0	24.00	12.10	120.00	80.00	11.6-12	13.00	8.00	12.00	75.00

Deseen International STAINLESS HARDWARE

WOODEN THREADED EYE SCREW, SS304 OR SS316.




SIZE	Φ mm	A mm	B mm	C mm	D mm	L mm
M6 × 40	5.6-6	6.30	7.00	30.00	6.00	40.00
M6 × 50	5.6-6	6.30	7.00	35.00	6.00	50.00
M6 × 55	5.6-6	6.30	7.00	40.00	6.00	55.00
M6 × 60	5.6-6	6.30	7.00	40.00	6.00	60.00
M8 × 60	7.6-8	8.40	9.00	40.00	8.00	60.00
M8 × 75	7.6-8	8.40	9.00	50.00	8.00	75.00
M8 × 80	7.6-8	8.40	9.00	55.00	8.00	80.00
M8 × 100	7.6-8	8.40	9.00	65.00	8.00	100.00
M10 × 75	9.6-10	10.20	11.00	50.00	10.00	75.00
M10 × 80	9.6-10	10.20	11.00	55.00	10.00	80.00
M10 × 85	9.6-10	10.20	11.00	60.00	10.00	85.00
M10 × 100	9.6-10	10.20	11.00	65.00	10.00	100.00
M10 × 120	9.6-10	10.20	11.00	80.00	10.00	120.00
M12 × 100	11.6-12	12.10	13.00	65.00	12.00	100.00
M12 × 120	11.6-12	12.10	13.00	80.00	12.00	120.00

FULL BOLT (全牙丝杆)



SIZE	M mm	A mm
M6	M6*3000	80
M8	M8*3000	170
M10	M10*3000	250
M12	M12*3000	400
M18	M18*3000	800

FORGED MACHINERY EYE BOLT S-279 UNC

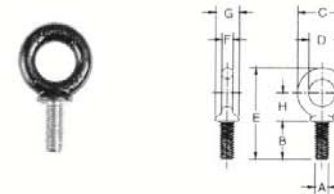

SIZE	WORKING LOAD LIMIT (lbs.)	WEIGHT PER 100 (lbs.)	DIMENSIONS (in.)							
			A** THREAD	B	C	D	E	F	G	H
1/4 × 1	650	5.00	1/4-20	1.02	1.13	0.75	2.29	0.19	0.53	0.77
5/16 × 1-1/8	1200	9.00	5/16-18	1.15	1.38	0.88	2.74	0.25	0.59	0.95
3/8 × 1-1/4	1550	15.00	3/8-16	1.27	1.62	1.00	3.07	0.31	0.69	1.05
1/2 × 1-1/2	2600	28.00	1/2-13	1.53	1.95	1.19	3.70	0.38	0.91	1.27
5/8 × 1-3/4	5200	55.00	5/8-11	1.79	2.38	1.38	4.45	0.50	1.13	1.53
3/4 × 2	7200	96.00	3/4-10	2.05	2.76	1.50	5.07	0.63	1.38	1.71
7/8 × 2-1/4	10600	154.00	7/8-9	2.31	3.25	1.75	5.87	0.75	1.56	2.00
1 × 2-1/2	13300	238.00	1-8	2.57	3.76	2.00	6.66	0.88	1.81	2.30
1-1/8 × 2-3/4	15000	320.00	1-1/8-7	2.75	4.19	2.25	7.20	0.97	2.06	2.35
1-1/4 × 3	21000	399.00	1-1/4-7	3.09	4.50	2.50	7.95	1.00	2.28	2.73
1-1/2 × 3-1/2	24000	720.00	1-1/2-6	3.60	5.50	3.00	9.49	1.25	2.75	3.28
1-3/4 × 3-3/4	34000	1040.00	1-3/4-5	3.75	6.26	3.50	10.48	1.38	3.00	3.60
2 × 4	42000	1880.00	2-4-1/2	4.00	7.62	4.00	12.31	1.81	3.38	4.50
2-1/2 × 5	65000	3250.00	2-1/2-4	5.00	8.76	4.50	14.88	2.12	4.25	5.50

M-279 METRIC

SIZE	WORKING LOAD LIMIT (kg.)	WEIGHT EACH (kg.)	DIMENSIONS (in.)							
			A** THREAD	B	C	D	E	F	G	H
M6 × 13	200	0.03	M6 × 1.0	13.0	28.7	19.1	47.0	4.9	13.5	19.6
M8 × 13	400	0.05	M8 × 1.25	13.0	35.1	22.4	54.6	6.4	15.0	24.1
M10 × 17	640	0.07	M10 × 1.5	17.0	41.1	25.4	64.3	7.9	17.5	26.5
M12 × 20.5	1000	0.11	M12 × 1.75	20.5	49.5	30.2	77.7	9.7	23.1	32.8
M16 × 27	1800	0.25	M16 × 2.0	27.0	60.5	35.1	96.0	12.7	28.7	38.9
M20 × 30	2500	0.42	M20 × 2.5	30.0	70.0	38.1	108	16.0	35.1	43.4
M24 × 36	4000	1.05	M24 × 3.0	36.0	95.5	51.0	142	22.4	46.0	58.4
M27 × 69.8	5000	1.42	M27 × 3.0	69.8	107	57.1	183	24.6	52.3	59.7
M30 × 45	6000	1.77	M30 × 3.5	45.0	114	63.5	171	25.4	58.0	69.3
M36 × 54	8500	3.12	M36 × 4.0	54.0	140	76.0	207	31.8	70.0	83.3
M42 × 95.2	14000	4.58	M42 × 4.5	95.2	159	88.9	266	35.0	76.2	91.4
M48 × 102	17300	8.71	M48 × 5.0	102	194	101	313	46.0	85.9	114
M64 × 127	29500	14.74	M64 × 6.0	127	223	114	378	53.8	108	140

Deseen International STAINLESS HARDWARE




REGULAR NUT EYE BOLT G-291,SS304 OR SS316.

SHANK DIA. & LENGTH (in.)	WORKING LOAD LIMIT (lbs.)	WEIGHT PER 100 (lbs.)	DIMENSIONS (in.)							
			A	B	C	D	E	F	G	H
1/4 x 2	650	8.20	0.25	0.50	1.00	0.25	1.50	2.00	3.06	0.56
1/4 x 4	650	11.70	0.25	0.50	1.00	0.25	2.50	4.00	5.06	0.56
5/16 x 2-1/4	1200	13.30	0.31	0.62	1.25	0.31	1.50	2.25	3.56	0.69
5/16 x 4-1/4	1200	25.00	0.31	0.62	1.25	0.31	2.50	4.25	5.56	0.69
3/8 x 2-1/2	1550	23.30	0.38	0.75	1.50	0.38	1.50	2.50	4.12	0.88
3/8 x 4-1/2	1550	29.50	0.38	0.75	1.50	0.38	2.50	4.50	6.12	0.88
3/8 x 6	1550	35.20	0.38	0.75	1.50	0.38	2.50	6.00	7.62	0.88
1/2 x 3-1/4	2600	50.30	0.50	1.00	2.00	0.50	1.50	3.25	5.38	1.12
1/2 x 6	2600	66.10	0.50	1.00	2.00	0.50	3.00	6.00	8.12	1.12
1/2 x 8	2600	82.00	0.50	1.00	2.00	0.50	3.00	8.00	10.12	1.12
1/2 x 10	2600	88.00	0.50	1.00	2.00	0.50	3.00	10.00	12.12	1.12
1/2 x 12	2600	114.20	0.50	1.00	2.00	0.50	3.00	12.00	14.12	1.12
5/8 x 4	5200	103.10	0.62	1.25	2.50	0.62	2.00	4.00	6.69	1.44
5/8 x 6	5200	118.20	0.62	1.25	2.50	0.62	3.00	6.00	8.69	1.44
5/8 x 8	5200	135.10	0.62	1.25	2.50	0.62	3.00	8.00	10.69	1.44
5/8 x 10	5200	153.60	0.62	1.25	2.50	0.62	3.00	10.00	12.69	1.44
5/8 x 12	5200	167.10	0.62	1.25	2.50	0.62	4.00	12.00	14.69	1.44
3/4 x 4-1/2	7200	168.60	0.75	1.50	3.00	0.75	2.00	4.50	7.69	1.69
3/4 x 6	7200	184.50	0.75	1.50	3.00	0.75	3.00	6.00	9.19	1.69
3/4 x 8	7200	207.90	0.75	1.50	3.00	0.75	3.00	8.00	11.19	1.69
3/4 x 10	7200	235.00	0.75	1.50	3.00	0.75	3.00	10.00	13.19	1.69
3/4 x 12	7200	257.50	0.75	1.50	3.00	0.75	4.00	12.00	15.19	1.69
3/4 x 15	7200	298.00	0.75	1.50	3.00	0.75	5.00	15.00	18.19	1.69
7/8 x 5	10600	270.00	0.88	1.75	3.50	0.88	2.50	5.00	8.75	2.00
7/8 x 8	10600	308.00	0.88	1.75	3.50	0.88	4.00	8.00	11.75	2.00
7/8 x 12	10600	400.00	0.88	1.75	3.50	0.88	4.00	12.00	15.75	2.00
1 x 6	13300	421.00	1.00	2.00	4.00	1.00	3.00	6.00	10.31	2.31
1 x 9	13300	468.50	1.00	2.00	4.00	1.00	4.00	9.00	13.31	2.31
1 x 12	13300	540.00	1.00	2.00	4.00	1.00	4.00	12.00	16.31	2.31
1 x 18	13300	650.00	1.00	2.00	4.00	1.00	7.00	18.00	21.31	2.31
1-1/4 x 8	21000	750.00	1.25	2.50	5.00	1.25	4.00	8.00	13.38	2.88
1-1/4 x 12	21000	900.00	1.25	2.50	5.00	1.25	4.00	12.00	17.38	2.88

梯型螺母 CSLM05



SIZE	A(mm)	B(mm)	C(mm)	D(mm)
M14	87	10	54	20

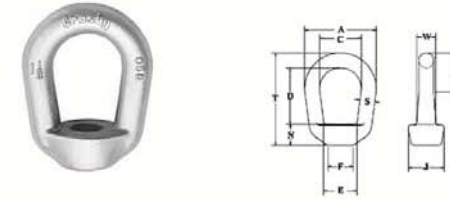


G-400 EYE NUTS,SS304 OR SS316.

STD.TAP SIZE (in.)	WORKING LOAD LIMIT (lb)	WEIGHT EACH (kg)	DIMENSIONS (in.)									
			A	C	D	E	F	J	K	N	T	W
1/4	0.24	0.04	31.8	19.1	25.4	19.1	12.7	17.5	16.0	11.7	43.7	7.85
3/8	0.57	0.08	41.1	25.4	30.5	21.1	14.2	20.6	22.6	14.7	53	10.4
1/2	1.02	0.13	51.0	31.8	36.6	27.4	20.6	25.4	27.7	18.5	63.5	12.7
5/8	1.63	0.27	63.5	38.1	48.8	34.3	25.4	33.3	33.3	21.1	82.5	17.5
3/4	2.36	0.45	76.0	44.5	58.0	40.4	28.4	38.1	39.9	26.7	100	21.3
7/8	3.27	0.75	89.0	51.0	63.5	49.8	35.1	47.8	45.0	29.0	111	25.4
1	4.54	1.22	102	57.0	74.0	56.0	39.6	54.0	51.5	33.0	129	30.2
1-1/4	7.03	1.98	114	63.5	85.0	62.5	47.8	60.5	57.5	38.6	149	35.1
1-3/8	8.39	2.27	127	70.0	102	68.5	51.0	65.0	64.5	42.4	165	38.1
1-1/2	10.21	3.08	143	79.0	109	78.5	57.0	76.0	71.5	46.5	179	42.2
2	18.14	6.62	181	104	152	104	79.5	95.5	93.5	63.0	257	49.3


Deseen International STAINLESS HARDWARE

US EYE BOLT G-277 (美式吊环螺丝 G-277)

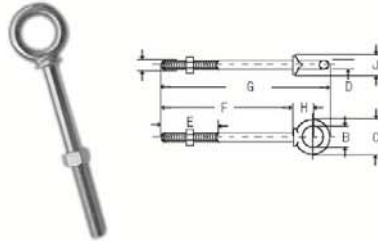

SIZE	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	J inch	WLL lbs
1/4 x 2	0.25	0.50	0.88	0.19	1.50	2.00	2.94	0.50	0.47	500
1/4 x 4	0.25	0.50	0.88	0.19	2.50	4.00	4.94	0.50	0.47	500
5/16 x 2 1/4	0.31	0.62	1.12	0.25	1.50	2.25	3.50	0.69	0.56	800
5/16 x 4 1/4	0.31	0.62	1.12	0.25	2.50	4.25	5.50	0.69	0.56	800
3/8 x 2 1/2	0.38	0.75	1.38	0.31	1.50	2.50	3.97	0.78	0.66	1200
3/8 x 4 1/2	0.38	0.75	1.38	0.31	2.50	4.50	5.97	0.78	0.66	1200
1/2 x 3/4	0.50	1.00	1.75	0.38	1.50	3.25	5.12	1.00	0.91	2200
1/2 x 6	0.50	1.00	1.75	0.38	3.00	6.00	7.88	1.00	0.91	2200
5/8 x 4	0.62	1.25	2.25	0.50	2.00	4.00	6.44	1.31	1.12	3500
5/8 x 6	0.62	1.25	2.25	0.50	3.00	6.00	8.44	1.31	1.12	3500
3/4 x 4 1/2	0.75	1.50	2.75	0.62	2.00	4.50	7.44	1.56	1.38	5200
3/4 x 6	0.75	1.50	2.75	0.62	3.00	6.00	8.94	1.56	1.38	5200
3/4 x 5	0.88	1.75	3.25	0.75	2.50	5.00	8.47	1.84	1.56	7200
1 x 6	1.00	2.00	3.75	0.88	3.00	6.00	9.97	2.09	1.81	10000
1 x 9	1.00	2.00	3.75	0.88	4.00	9.00	12.97	2.09	1.81	10000
1 1/4 x 8	1.25	2.25	4.50	1.00	4.00	8.00	12.97	2.47	2.28	15200
1 1/4 x 12	1.25	2.25	4.50	1.00	4.00	12.00	16.72	2.47	2.28	15200
1 1/2 x 15	1.25	3.00	5.50	1.25	6.00	15.00	20.75	3.00	2.75	21400

SWIVEL BOLT (活节螺栓)




SIZE	M mm	A mm	B mm	C mm	D mm	E mm
M8 x 60	8	60	8.3	51	16	8
M10 x 50	10	50	10.4	40	20	10
M10 x 60	10	60	10.4	50	20	10
M10 x 70	10	70	10.4	60	20	10
M10 x 80	10	80	10.4	70	20	10
M10 x 90	10	90	10.4	80	20	10
M12 x 60	12	60	12.4	48	24	12
M12 x 80	12	80	12.3	68	24	12
M12 x 100	12	100	12.3	88	24	12
M12 x 120	12	120	12.3	108	24	12
M12 x 150	12	150	12.3	138	24	12
M16 x 80	16	80	16.3	65	32	16
M16 x 100	16	100	16.3	85	32	16
M16 x 120	16	120	16.3	105	32	16
M16 x 150	16	150	16.3	135	32	16
M20 x 80	20	80	20.3	60	40	20
M20 x 100	20	100	20.3	80	40	20
M20 x 120	20	120	20.3	100	40	20
M20 x 150	20	150	20.3	130	40	20
M22 x 80	22	80	22.5	57	44	22
M22 x 100	22	100	22.5	77	44	22
M22 x 120	22	120	22.5	97	44	22
M22 x 150	22	150	22.5	127	44	22
M24 x 100	24	100	24.5	75	48	24
M24 x 120	24	120	24.5	95	48	24

Deseen International STAINLESS HARDWARE

MAME SWIVEL BLOCK (STAINLESS CASTING SHEAVE),SS304 OR SS316. 314TYPE


CSSB0102

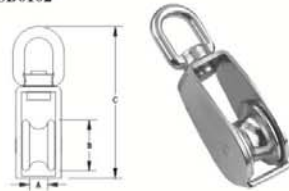

SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
15	6.00	15.00	60.00	---	---
20	6.00	20.00	70.00	---	---
25	10.00	25.00	82.00	375	1500
32	12.00	32.00	95.00	425	1800
50	21.00	50.00	124.00	700	3500

SANMA SWIVEL BLOCK (STAINLESS SHEAVE WITH BRASS BUSHING), SS304 OR SS316.

CSSB0101

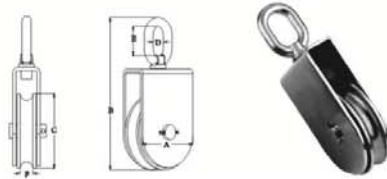

SIZE	A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
50	45.00	115.00	50.00	19.00	28.00	14.00	750	3000
75	70.00	175.00	75.00	24.00	40.00	14.00	1125	4500
100	95.00	200.00	100.00	24.00	40.00	17.00	1900	7600

MAME SWIVEL BLOCK (STAINLESS CASTING SHEAVE WITH EYE END) ,SS304 OR SS316.


CSSB0103



SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
25	10.00	25.00	82.00	375	1500
32	12.00	32.00	95.00	425	1800
50	21.00	50.00	124.00	700	3500

MAME SWIVEL BLOCK(DOUBLE CASTING SHEAVE WITH EYE END),SS304 OR SS316.


CSSB0201

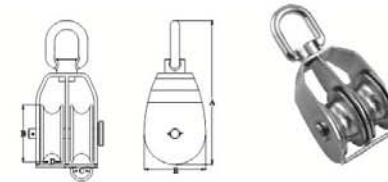

SIZE	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
20	70	23.00	6.00	8.00	---	---	---
25	103.00	25.00	12.00	14.00	30.00	500	2000
32	116.00	32.00	12.00	14.00	36.00	575	2300
50	150.00	50.00	15.00	20.00	54.00	850	3400

MAME SWIVEL BLOCK(DOUBLE CASTING SHEAVE),SS304 OR SS316.


CSSB0203

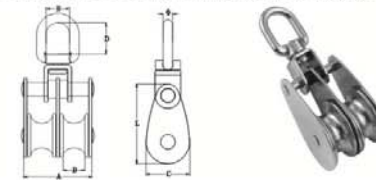

SIZE	φ mm	A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
25	5.80	41.00	11.50	27.00	19.20	19.20	49.00	238	950
32	5.80	41.00	12.00	36.00	19.20	19.20	62.00	238	950
50	7.50	51.00	14.00	54.00	26.00	26.00	85.00	700	2800

MAME SWIVEL BLOCK(STAINLESS CASTING SHEAVE),SS304 OR SS316.

CSSB0104

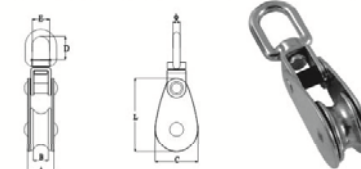


SIZE	φ mm	A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
25	5.80	21.00	11.50	27.00	19.20	14.50	49.00	375	1500
32	5.80	21.00	12.00	36.00	19.20	14.50	62.00	425	1700
50	7.50	26.00	14.00	54.00	26.00	19.50	85.00	700	2800

Deseen International STAINLESS HARDWARE


WIRE ROPE SHEAVE, SS304 OR SS316.

BSSB02

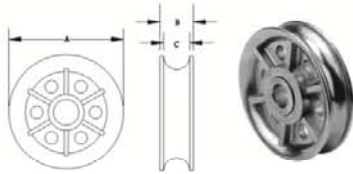


SIZE	A mm	B mm	C mm
25	25.00	17.00	11.50
32	32.00	16.50	11.50
50	50.00	20.00	14.00
75	75.00	20.00	15.00
75	75.00	28.50	22.00
100	100.00	25.00	18.00
100	100.00	35.00	28.00
125	125.00	25.50	19.50

PULLEY BLOCK-TYPE B (PIN RIVET) NYLON SHEAVE, SS304 OR SS316.

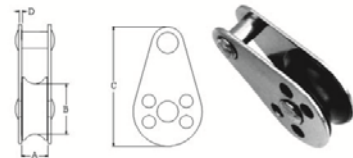

A mm	B mm	C mm	D mm
10.00	19.00	45.17	1.20

PULLEY BLOCK-TYPE C (REMOVABLE PIN WITH) NYLON SHEAVE, NYLON SHEAVE.

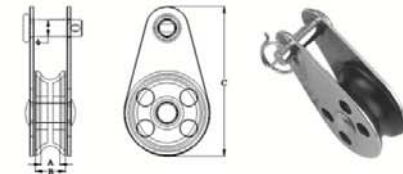

φ mm	A mm	B mm	C mm
5.00	7.00	9.00	50.00

SWIVEL



SIZE	A mm	B mm	C mm
2KN	9	5	30
4KN	11	5	35

PULLEY BLOCK-TYPE D (WITH BRACKET AND PIN RIVET) NYLON SHEAVE




φ mm	A mm	B mm	C mm
7.00	9.00	63.00	10.00

PULLEY BLOCK-TYPE A (PIN RIVET) NYLON SHEAVE, SS304 OR SS316.



A mm	B mm	C mm	D mm
7.00	9.00	42.50	9.50

PULLEY BLOCK-TYPE F (WITH PIN RIVET AND BRACKET) NYLON SHEAVE

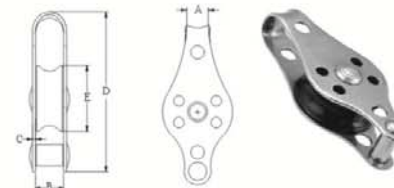

A mm	B mm	C mm	D mm	E mm
8.80	10.30	1.15	59.30	25.50


LIGHT PULLEY BLOCK-TYPE C (REMOVABLE PIN RIVET) BRASS SHEAVE



A mm	B mm	C mm	D mm
6.50	7.50	32.00	3.35


Deseen International STAINLESS HARDWARE

PAD EYE,SS304 OR SS316.CSLB02

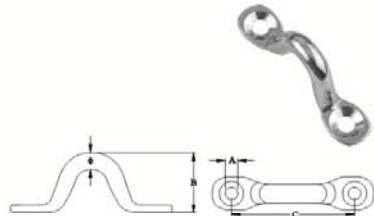


SIZE mm	Φ mm	A mm	B mm	C mm
4	4.00	3.20	16.00	32.00
5	5.00	4.20	17.50	40.00
6	6.00	5.20	22.50	45.00
8	8.00	5.20	23.00	50.00
10	10.00	8.20	28.00	62.00

STRONG PAD EYE(CASTING),SS304 OR SS316.CSLB01




SIZE mm	A mm	B mm	C mm	D mm	E mm
10g	15.00	48.00	15.00	5.00	4.70

EYE STRAP(TWO HOLE TYPE),SS304 OR SS316.CSLB02

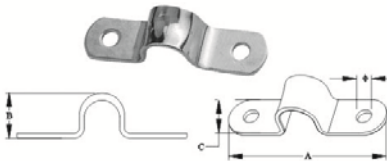


Φ mm	A mm	B mm	C mm
4.20	43.50	11.00	11.00
4.20	46.50	14.00	11.00
4.20	48.50	17.00	11.00

EYE STRAP(FOUR HOLE TYPE),SS304 OR SS316.

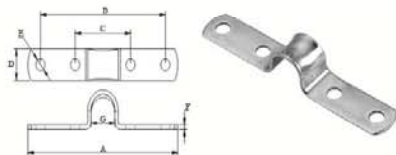


A mm	B mm	C mm	D mm	E mm	F mm	G mm
66.00	56.00	26.00	11.00	4.20	1.50	10.00
69.00	57.50	25.50	11.00	4.20	1.50	13.00
72.00	59.50	35.50	11.00	4.20	1.50	16.00

U-BOLT WITH WASHER AND NUTS,SS304 OR SS316.

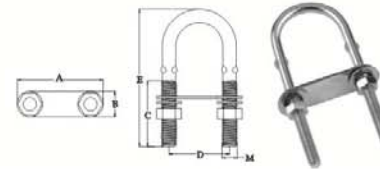

A mm	B mm	C mm	D mm	E mm	M mm
45.00	12.00	30.00	30.00	60.00	M4.00
50.00	13.00	40.00	36.00	80.00	M5.00
50.00	15.00	40.00	36.00	90.00	M6.00
50.00	15.00	40.00	36.00	80.00	M8.00
50.00	15.00	50.00	35.00	100.00	M8.00
70.00	20.00	55.00	52.00	90.00	M10.00
70.00	20.00	55.00	52.00	130.00	M10.00
83.00	23.00	65.00	62.00	150.00	M12.00

V-BOLT WITH WASHER AND NUTS,SS304 OR SS316. CSUS

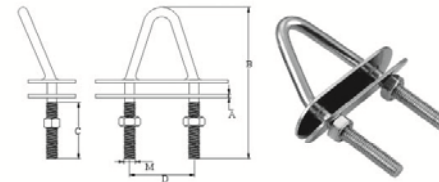

SIZE mm	A mm	B mm	C mm	D mm	M mm
M6×30	2.00	79.80	30.00	35.00	M6
M6×42	2.00	99.70	42.00	35.00	M6
M8×30	2.00	81.00	30.00	41.00	M8
M8×40	2.00	100.50	40.00	41.00	M8
M10×40	2.00	100.50	40.00	49.00	M10
M10×50	2.00	120.60	50.00	49.00	M10

U-BOLT WITH WASHER AND NUTS,SS304 OR SS316. CSUS



A mm	B mm	C mm	L mm	L1 mm	L2 mm	L3 mm
35.00	8.00	10.00	65.00	39.00	3.00	23.00
35.00	8.00	10.00	76.00	39.00	5.00	32.00
35.00	8.00	10.00	90.00	39.00	4.00	47.00
35.00	8.00	10.00	115.00	39.00	29.00	47.00
35.00	8.00	10.00	140.00	39.00	54.00	47.00
35.00	8.00	10.00	165.00	39.00	79.00	47.00

Deseen International STAINLESS HARDWARE

EYE HOOKS CSHG01



SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
19	19.00	33.50	100.00	20.50	188	750
28	28.00	44.50	115.00	23.00	250	1000

EYE HOOKS ,SS304 OR SS316. CSHG08




SIZE	A mm	D mm	L mm
88	22.00	13.00	88.00
107	24.50	16.00	107.00
123	26.80	18.00	123.00

CLEVIS GRAB HOOKS,SS304 OR SS316. CSHG02




SIZE	φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
09	9.00	43.00	78.50	8.00	11.00	525	2100
11	11.00	53.00	94.00	11.00	13.00	775	3100
12	12.00	61.50	107.00	12.00	18.00	1000	4000
16	16.00	80.00	143.00	16.00	19.00	1838	7350

C-LINK,SS304 OR SS316.

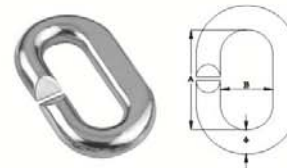


SIZE	A mm	B mm
5.00	20.00	8.00
6.00	24.00	9.00
8.00	32.00	12.00
9.00	36.00	13.50
10.00	40.00	15.50
11.00	44.00	17.00
13.00	52.00	20.50
16.00	64.00	24.50
19.00	76.00	28.00
22.00	88.00	33.00
25.00	100.00	37.00

SLIP HOOK--HEAVY TYPE(SWIVEL END WITH SAFETY LATCH),SS304 OR SS316. CSHG08

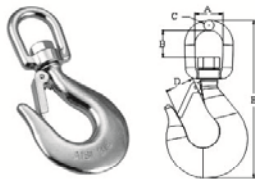

SIZE	A mm	B mm	C mm	D mm	E mm
117	21.50	22.00	6.50	21.50	117.00
140	28.00	28.00	9.00	25.80	141.50
160	28.00	28.50	10.00	29.00	162.00
200	36.00	34.50	13.00	36.90	202.30

EYE HOOK,SS304 OR SS316.

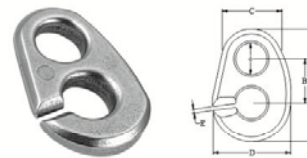


φ mm	A mm	B mm	C mm	D mm	E mm
16.00	57.50	12.30	27.00	40.00	2.00

Deseen International STAINLESS HARDWARE

OBLIQUE ANGLE SNAP HOOK WITH EYELET AND SPRING PIN,SS304 OR SS316.


STEEL ELECTRIC GALVANIZED

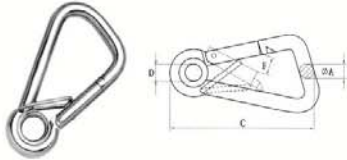

SIZE	ΦA mm	C mm	D mm	F mm	W.L.L. LBS
5*50	5	50	5	9	100
6*60	6	60	5	10	140
8*80	8	80	10	13	250
10*100	10	100	13	18	400
11*120	11	120	13	24	500


OBLIQUE ANGLE SNAP HOOK WITH EYELET AND RIVETS AT BOTH END,SS304 OR SS316.

STEEL ELECTRIC GALVANIZED

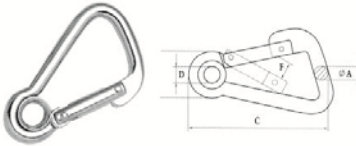


SIZE	ΦA mm	C mm	D mm	F mm	W.L.L. LBS
5*50	5	50	5	9	100
6*60	6	60	5	10	140
8*80	8	80	10	13	250
10*100	10	100	13	18	400
11*120	11	120	13	24	500

SWIVEL EYE SNAP,SS304 OR SS316. CSSH05

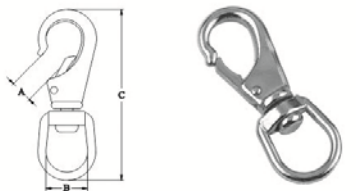


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
0	8.50	15.00	69.00	38	150
1	9.80	21.00	86.00	43	170
2	11.50	21.00	99.50	63	250
3	13.00	22.00	117.50	85	340

RIGID EYE SNAP,SS304 OR SS316. CSSH06

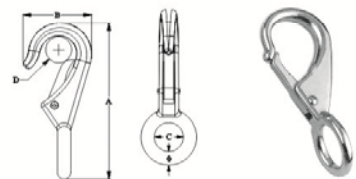


SIZE	Φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
0	4.00	54.50	22.50	11.50	6.50	40	160
1	5.00	72.50	29.00	16.00	10.50	50	200
2	5.50	86.00	34.50	19.00	12.00	75	300
3	7.50	100.00	41.50	19.50	12.50	113	450

SPRING SNAP-CASTING,EYE END,SS304 OR SS316. CSSH03




SIZE	ΦA mm	B mm	C mm	SWL kgs	BL kgs
35	20.00	35.00	10.00		
50	23.50	50.00	10.50	55	220
70	31.00	70.00	12.50	125	500
100	47.00	100.00	20.00	225	900

TRIGGER SNAP (SWIVEL END),SS304 OR SS316. CSSH07

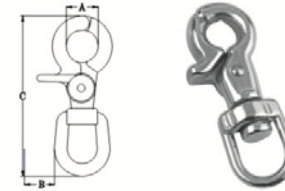


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
50	10.50	13.00	50.00	50	200
64	10.50	16.00	65.00	60	200

SWIVEL EYE BOLT SNAP,SS304 OR SS316. CSSH01

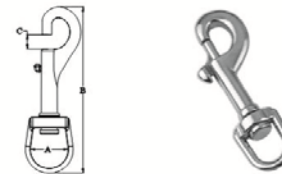

SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
65	10.50	63.50	7.00	45	180
88	12.50	88.00	13.00	63	250
90	15.80	90.00	13.00	163	650
93	19.00	93.00	13.00	163	650
100	25.40	100.00	13.00	150	600
119	28.60	119.00	17.00	150	600
123	31.75	123.00	17.00	125	500


DOUBLE ENDED BOLT SNAP,SS304 OR SS316. CSSH02

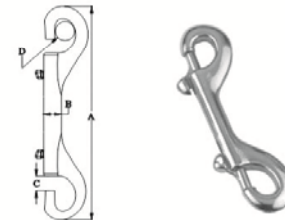

SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
90	90.00	9.00	10.50	9.40	45	180
105	105.50	9.50	11.00	10.00	88	350
121	121.50	9.50	12.50	13.00	90	360


Deseen International STAINLESS HARDWARE

RIGID EYE SNAP HOOK WITH SAFETY LATCH,SS304 OR SS316.

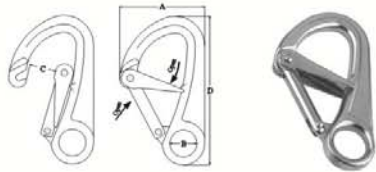


SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
107	62.00	20.00	19.00	107.00	388	1550

SPRING HOOK CASTING,SS304 OR SS316.

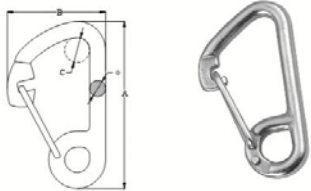


SIZE	φ mm	A mm	B mm	C mm
M5 × 50	4.80	50.00	28.00	10.50
M6 × 60	5.70	60.00	34.50	12.50
M8 × 80	7.70	80.00	46.00	17.00
M10 × 100	9.80	100.00	58.00	20.50
M12 × 120	11.80	120.00	72.00	25.00
M14 × 140	13.70	140.00	85.50	20.00
M16 × 160	15.70	160.00	98.00	25.00

SPRING HOOK,SS304 OR SS316.

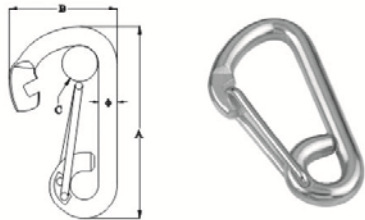


SIZE	φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
M5 × 50	5.00	50.00	28.00	10.00	--	--
M6 × 60	6.00	60.00	34.50	12.50	188	750
M8 × 80	8.00	80.00	46.00	17.00	438	1750
M10 × 100	10.00	100.00	55.00	23.50	563	2250
M12 × 120	12.00	120.00	72.00	28.00	913	3650
M14 × 140	14.00	140.00	84.00	32.00	1064	4200

SPRING SNAP-CASTED(HOOK END),SS304 OR SS316.

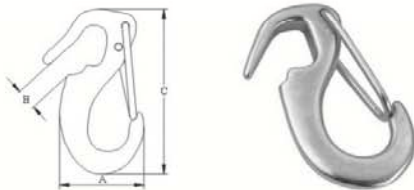


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
50	25.00	9.00	50.00	60	250
53	30.00	8.50	53.00	75	300
60	32.75	7.50	60.00	80	320
65	35.00	8.70	65.00	85	350
90	49.00	11.00	90.00	175	700

HEAVY RING CATCH SCREW PIN,SS304 OR SS316.

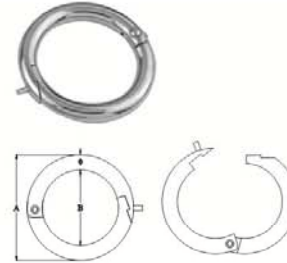


SIZE	φ mm	A mm	B mm
6 × 30	6.00	42.00	30.00
8 × 35	8.00	51.00	35.00

SWIVEL SNAP SHACKLES WITH EYE END,SS304 OR SS316

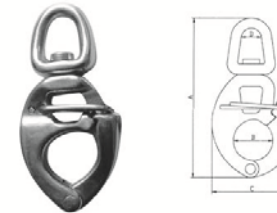

SIZE	A mm	B mm	C mm	D mm
93mm	93	23	45	14

SNAP HOOK WITH EYE,SS304 OR SS316

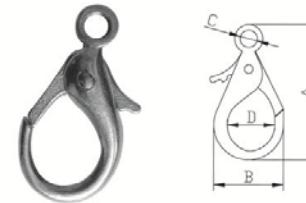


SIZE	A mm	B mm	C mm	D mm
33	31	16	3.5	10

Deseen International


STAINLESS HARDWARE

WIDE JAW QUICK LINK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

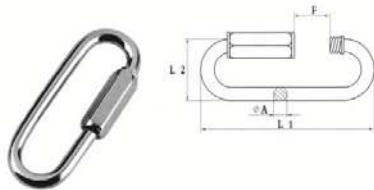

SIZE mm	φA mm	L1 mm	L2 mm	F mm	W.L.L. lbs
3.5	3.5	47	17	10	175
5	5	62	23	14	650
6	6	72	26.5	16	875
8	8	90	33.5	18	1525
10	10	105	40.5	20	2300
12	12	122	47.5	23	2500

PEAR SHAPED QUICK LINK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

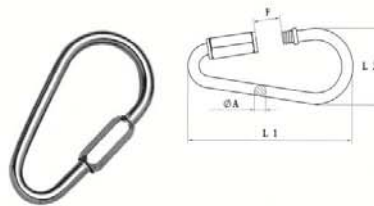


φA mm	L1 mm	L2 mm	F mm	W.L.L. lbs
3.5	52	27	9.5	120
4	60	32	11	350
5	70	37	12	450
6	81	42.8	14	600
8	100	50.8	17	1100
9	108	57	19	1300
10	117.5	63.5	20.5	1500
12	141	76	23	1650

D TYPE SNAP HOOK WITH SCREW




SIZE mm	φA mm	B mm	C mm	D mm
10 x 110	10	60	110	19

EGG TYPE SNAP HOOK DIN5299 FORM B,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

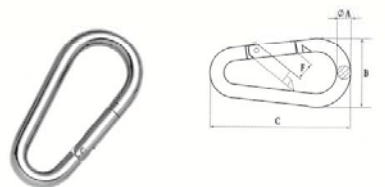


SIZE mm	φA mm	B mm	C mm	F mm	W.L.L. lbs
5 x 50	5	25	50	7	100
6 x 60	6	30	60	8	140
7 x 70	7	35	70	8	200
8 x 80	8	40	80	9	250
9 x 90	9	45	90	10	280
10 x 100	10	50	100	11	400
11 x 120	11	57	120	16	500
12 x 140	12	67	140	19	600

OBLIQUE ANGLE SNAP HOOK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

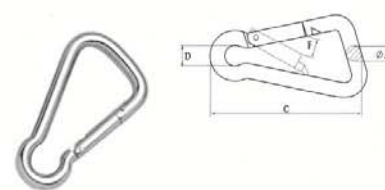


SIZE mm	φA mm	C mm	D mm	F mm	W.L.L. lbs
5 x 50	5	50	8	9	100
6 x 60	6	60	9	10	140
8 x 80	8	80	12	13	250
10 x 100	10	100	15	18	400
11 x 120	11	120	15	24	500

OBLIQUE ANGLE SNAP HOOK WITH EYELET,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

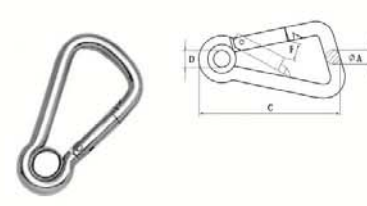


SIZE mm	φA mm	C mm	D mm	F mm	W.L.L. lbs
5 x 50	5	50	5	9	100
6 x 60	6	60	5	10	140
8 x 80	8	80	10	13	250
10 x 100	10	100	13	18	400
11 x 120	11	120	13	24	500

STRAIGHT SNAP HOOK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

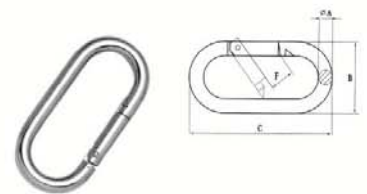

SIZE mm	φA mm	B mm	C mm	F mm	W.L.L. lbs
5 x 50	5	25	50	9	100
6 x 60	6	30	60	11	140
8 x 80	8	40	80	13	250
10 x 100	10	50	100	16	400
11 x 120	11	58	120	21	500

STRAIGHT SNAP HOOK WITH SCREW,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

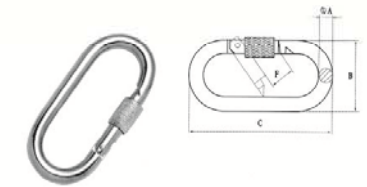


SIZE mm	φA mm	B mm	C mm	F mm	W.L.L. lbs
5 x 50	5	25	50	9	100
6 x 60	6	30	60	11	140
8 x 80	8	40	80	13	250
10 x 100	10	50	100	16	400
11 x 120	11	58	120	21	500

Deseen International STAINLESS HARDWARE

SNAP HOOK DIN5299 FORM C,SS304 OR SS316,STEEL ELECTRIC GALVANIZED


CSSH09

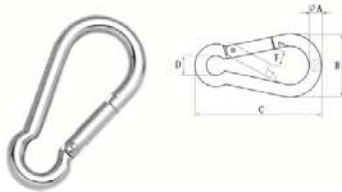

SIZE mm	φ A mm	B mm	C mm	D mm	F mm	W.L.L lbs
4 x 40	4	20	40	7	7	80
5 x 50	5	25	50	8	7	100
6 x 60	6	30	60	9	8	140
7 x 70	7	35	70	10	8	200
8 x 80	8	40	80	12	9	250
9 x 90	9	45	90	12	10	280
10 x 100	10	50	100	15	11	400
11 x 120	11	57	120	18	16	500
12 x 140	12	67	140	20	19	600
13 x 160	13	74	160	22	25	700
14 x 180	14	86	180	22	35	900

SNAP HOOK WITH SCREW DIN5299 FORM D,SS304 OR SS316,STEEL ELECTRIC GALVANIZED


CSSH11

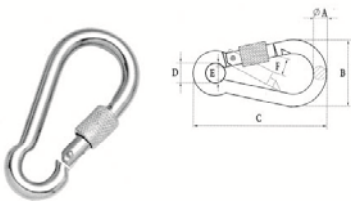

SIZE mm	φ A mm	B mm	C mm	D mm	F mm	W.L.L lbs
4 x 40	4	20	40	7	7	80
5 x 50	5	25	50	8	7	100
6 x 60	6	30	60	9	8	140
7 x 70	7	35	70	10	8	200
8 x 80	8	40	80	12	9	250
9 x 90	9	45	90	12	10	280
10 x 100	10	50	100	15	11	400
11 x 120	11	57	120	18	16	500
12 x 140	12	67	140	20	19	600
13 x 160	13	74	160	22	25	700
14 x 180	14	86	180	22	35	900

SNAP HOOK WITH EYELET DIN5299 FORM A,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

CSSH10

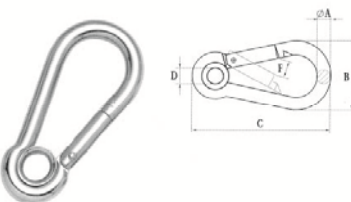

SIZE mm	φ A mm	B mm	C mm	D mm	F mm	W.L.L lbs
4 x 40	4	20	40	5	7	80
5 x 50	5	25	50	5	7	100
6 x 60	6	30	60	5	8	140
7 x 70	7	35	70	7	8	200
8 x 80	8	40	80	10	9	250
9 x 90	9	45	90	10	10	280
10 x 100	10	50	100	13	11	400
11 x 120	11	57	120	13	16	500
12 x 140	12	67	140	15	19	600
13 x 160	13	74	160	17	25	700
14 x 180	14	86	180	17	35	900

SNAP HOOK WITH EYELET AND SCREW,SS304 OR SS316,STEEL ELECTRIC GALVANIZED


CSSH12



SIZE mm	φ A mm	B mm	C mm	D mm	F mm	W.L.L lbs
5 x 50	5	25	50	5	7	100
6 x 60	6	30	60	5	8	140
7 x 70	7	35	70	7	8	200
8 x 80	8	40	80	10	9	250
9 x 90	9	45	90	10	10	280
10 x 100	10	50	100	13	11	400
11 x 120	11	57	120	13	16	500
12 x 140	12	67	140	15	19	600
13 x 160	13	74	160	17	25	700
14 x 180	14	86	180	17	35	900

DELTA SHAPED QUICK LINK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED


CSKS02

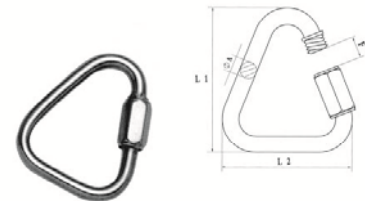

SIZE mm	φ A mm	L1 mm	L2 mm	F mm	W.L.L lbs
3.5	3.5	37	31	5	120
5	5	47	40	6	450
6	6	56	47	7.5	600
8	8	73	56	10	1100
10	10	87	66	12	1500
12	12	104	75	15	1650
14	14	122	86	19	1900

QUICK LINK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED


CSKS01

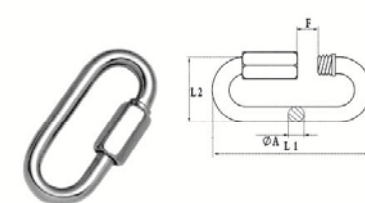


SIZE mm	φ A mm	L1 mm	L2 mm	F mm	W.L.L lbs
3.5	3.5	36.5	17	5	175
4	4	40	19.5	5.5	500
5	5	49	23	6.5	650
6	6	58	26.5	7.5	875
7	7	65	30.5	8.5	1200
8	8	75	33.5	10.5	1525
9	9	82	35	11.5	1975
10	10	90	40.5	12.5	2300
12	12	107	47.5	14.5	2500
14	14	125	54.5	17	2800

Deseen International STAINLESS HARDWARE


LONG STRAIGHT SNAP HOOK,SS304 OR SS316,STEEL ELECTRIC GALVANIZED

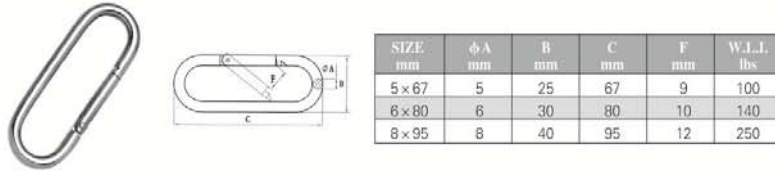


D TYPE SNAP HOOK STEEL ELECTRIC CALVANIZED

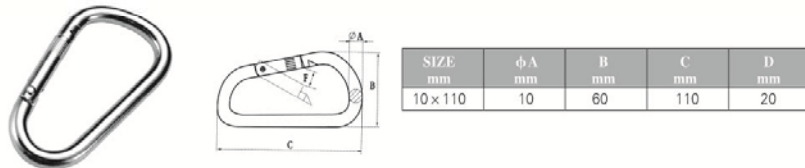


SPRING HOOK WITH FLAT TYPE,SS304 OR SS316

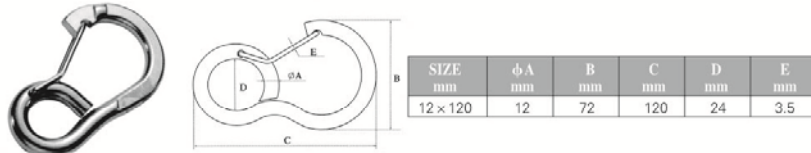


DELTA SNAP HOOK,SS304 OR SS316

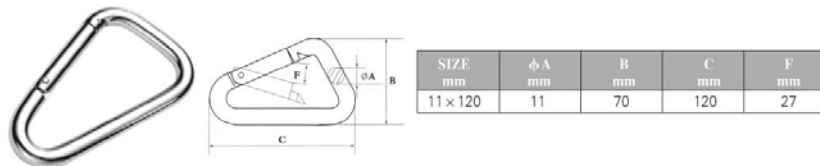


DELTA SNAP HOOK WITH SCREW AND BAR,SS304 OR SS316

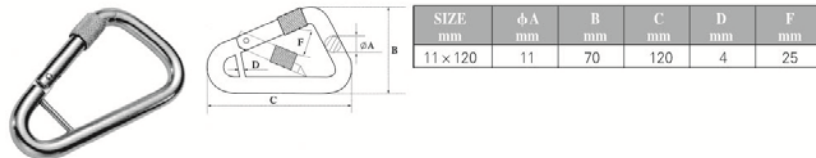


CARABINE TYPE QUICK LINK,SS304 OR SS316. STEEL ELECTRIC GALVANIZED

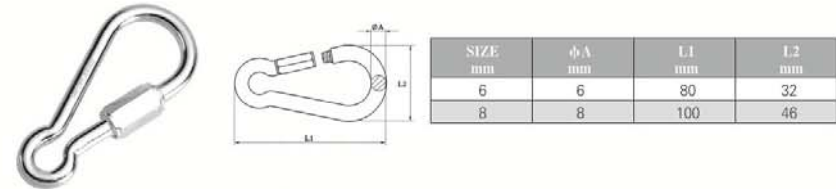


FLAT SNAP HOOK WITH TWO RIVETS,SS304 OR SS316

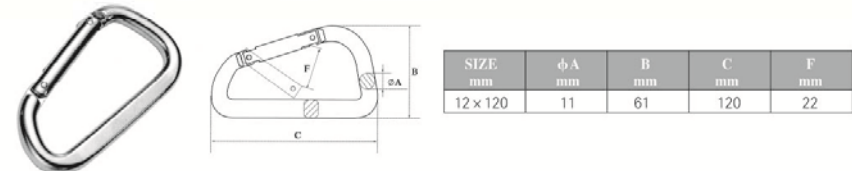


SNAP HOOK WITH BAR,SS304 OR SS316

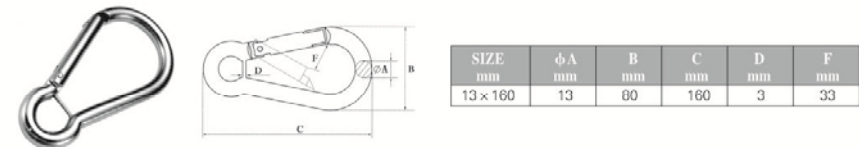


OVAL TYPE SNAP HOOK, STEEL ELECTRIC GALVANIZED



422.SNAP HOOK,SS304 OR SS316

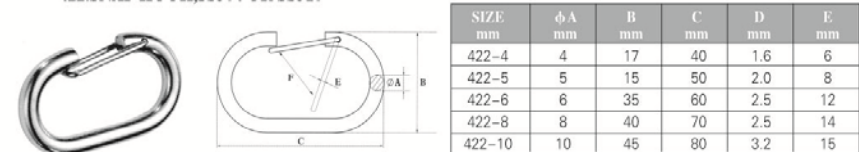


Deseen International STAINLESS HARDWARE

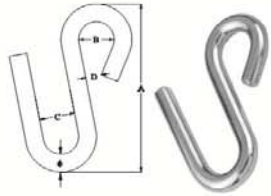


S-HOOK (OPEN END + NARROW END),SS304 OR SS316

SIZE	Φ mm	A mm	B mm	C mm	D mm
5 × 52	5.00	52.00	9.00	9.50	2.00
6 × 65	6.00	64.50	10.00	10.50	5.00
8 × 75	8.00	75.00	16.00	17.00	5.00
9 × 86	9.00	86.00	18.00	18.0	8.50
10 × 95	10.00	95.00	20.00	20.50	8.50




S-HOOK ,SS304 OR SS316.

SIZE	Φ mm	A mm	B mm	C mm
3 × 25	3.00	25.00	3.50	3.50
4 × 25	4.00	35.00	5.00	5.50
5 × 45	5.00	45.00	6.00	7.00
6 × 55	6.00	55.00	7.00	8.00
7 × 65	7.00	65.00	8.00	10.00
8 × 75	8.00	75.00	8.50	11.50
9 × 90	9.00	90.00	11.00	12.00
10 × 100	10.00	100.00	13.00	12.50



**S-HOOK WITH GATE(WIDE END + NARROW END),
SS304 OR SS316.**

SIZE	Φ mm	A mm	B mm	C mm
8 × 78	8.00	78.00	18.00	18.50



SNAP S-HOOK,SS304 OR SS316

SIZE	Φ mm	A mm	B mm	C mm	D mm
5 × 52	5.00	52.00	9.00	9.50	2.00
6 × 65	6.00	64.50	10.00	10.50	5.00
8 × 75	8.00	75.00	16.00	17.00	5.00
9 × 86	9.00	86.00	18.00	18.0	8.50
10 × 95	10.00	95.00	20.00	20.50	8.50

WELDED ROUND RING ,SS304 OR SS316.

SIZE	Φ mm	A mm	SWL kgs	BL kgs
3 × 15	3.00	15.00	162	650
3 × 20	3.00	20.00	162	650
3 × 25	3.00	25.00	162	650
3 × 30	3.00	30.00	162	650
3 × 35	3.00	35.00	162	650
3 × 40	3.00	40.00	162	650
40 × 20	4.00	20.00	250	1000
4 × 25	4.00	25.00	250	1000
4 × 30	4.00	30.00	250	1000
4 × 35	4.00	35.00	250	1000
4 × 40	4.00	40.00	250	1000
5 × 20	5.00	20.00	500	2000
5 × 25	5.00	25.00	500	2000
5 × 30	5.00	30.00	500	2000
5 × 35	5.00	35.00	500	2000
5 × 40	5.00	40.00	500	2000
5 × 45	5.00	45.00	500	2000
5 × 50	5.00	50.00	500	2000
5 × 60	5.00	60.00	500	2000
5 × 65	5.00	65.00	500	2000
6 × 25	6.00	25.00	675	2700
6 × 30	6.00	30.00	675	2700
6 × 35	6.00	35.00	675	2700
6 × 40	6.00	40.00	675	2700
6 × 45	6.00	45.00	675	2700
6 × 50	6.00	50.00	675	2700
6 × 55	6.00	55.00	675	2700
6 × 60	6.00	60.00	675	2700
6 × 80	6.00	80.00	675	2700
6 × 90	6.00	90.00	675	2700
8 × 30	8.00	30.00	1250	5000
8 × 35	8.00	35.00	1250	5000
8 × 40	8.00	40.00	1250	5000
8 × 45	8.00	45.00	1250	5000
8 × 50	8.00	50.00	1250	5000
8 × 55	8.00	55.00	1250	5000
8 × 60	8.00	60.00	1250	5000
8 × 65	8.00	65.00	1250	5000
8 × 70	8.00	70.00	1250	5000
8 × 75	8.00	75.00	1250	5000
8 × 80	8.00	80.00	1250	5000
8 × 90	8.00	90.00	1250	5000
8 × 100	8.00	100.00	1250	5000




SIZE	Φ mm	A mm	SWL kgs	BL kgs
10 × 40	10.00	40.00	2125	8500
10 × 50	10.00	50.00	2125	8500
10 × 55	10.00	55.00	2125	8500
10 × 60	10.00	60.00	2125	8500
10 × 65	10.00	65.00	2125	8500
10 × 70	10.00	70.00	2125	8500
10 × 75	10.00	75.00	2125	8500
10 × 80	10.00	80.00	2125	8500
10 × 90	10.00	90.00	2125	8500
10 × 100	10.00	100.00	2125	8500
12 × 60	12.00	60.00	2500	10000
12 × 65	12.00	65.00	2500	10000
12 × 70	12.00	70.00	2500	10000
12 × 75	12.00	75.00	2500	10000
12 × 80	12.00	80.00	2500	10000
12 × 90	12.00	90.00	2500	10000
12 × 100	12.00	100.00	2500	10000
12 × 110	12.00	110.00	2500	10000
12 × 120	12.00	120.00	2500	10000
12 × 140	12.00	140.00	2500	10000

Deseen International

STAINLESS HARDWARE

CSLH03

ROUND RING (CENTER CROSS BAR) WELDED



SIZE	A mm	Φ mm	SWL kgs	BL kgs
6×30	30	6	675	2700
6×40	40	6	675	2700
8×40	40	8	1250	5000
8×50	50	8	1250	5000
9×60	60	9	1550	6200
10×60	60	10	2150	8500
10×70	70	10	2150	8500
10×80	80	10	2150	8500
12×80	80	12	2500	10000




WIRE SUPPORT D-RING CSLH03

SIZE	A mm	B mm	C mm	D mm	Φ mm
8×66.5	66.5	70	72	9.6	8




WIRE SUPPORT D THIMBLE CSLH03

SIZE	A mm	B mm	C mm	D mm	Φ mm
8×66.5	66.5	59	19	8	35



BUCKLE RING CSLH08

SIZE	A mm	B mm	Φ mm
2.8×40.7	40.7	11.5	2.8
3.8×25	25	9	3.8




BUCKLE RING CSLH05

SIZE	A mm	B mm	Φ mm
2.8×19×19.20	19	19.2	2.8




D RING (D 型环) CSLH04

SIZE	A mm	L1 mm	L2 mm
3×25×22	3	25	22
4×25×22	4	25	22
4×30×27	4	30	27
5×30×27	5	30	27
5×40×37	5	40	37
6×40×37	6	40	37
6×50×47	6	50	47
8×40×37	8	40	37
8×50×47	8	50	47
10×50×47	10	50	47




BUCKLE RING CSLH07

SIZE	A mm	B mm	Φ mm
6×42	42	30	6
8×51	51	35	8




BUCKLE RING CSLH07

SIZE	A mm	B mm	Φ mm
6×42	42	30	6
8×51	51	35	8



BUCKLE RING CSLH07

SIZE	A mm	B mm	Φ mm
6×42	42	30	6
8×51	51	35	8




TRIANGLE RING(三角环) CSLH06

SIZE	D	L	H
5×30	5	30	30
5×45	5	45	45
5×50	5	50	50
6×50	6	50	50
6×60	6	60	60
8×50	8	50	50


Deseen International STAINLESS HARDWARE

DIAMOND EYE PLATE,SS304 OR SS316. CSMK07

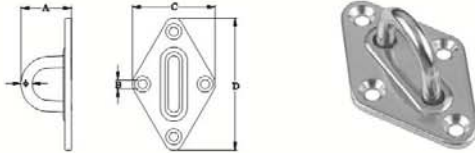


φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	22.50	4.00	36.50	59.00	175	700
6.00	26.50	4.00	39.50	64.00	250	1000
8.00	33.00	5.00	50.00	80.00	400	1600

DIAMOND EYE PLATE WITH RING,SS304 OR SS316. CSMK08

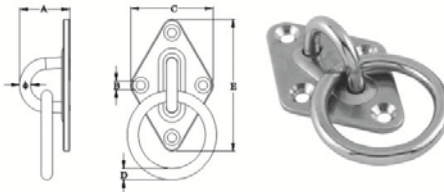


φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.00	22.50	4.00	36.50	5.00	59.00	175	700
6.00	26.50	4.00	39.50	6.00	64.00	250	1000
8.00	33.00	5.00	50.00	8.00	80.00	400	1600

SQUARE EYE PLATE,SS304 OR SS316. CSMK01

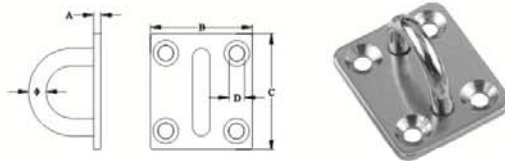


φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	2.50	30.00	35.00	4.30	175	700
6.00	2.50	35.00	40.00	5.30	250	1000
8.00	3.00	40.00	50.00	5.50	400	1600
10.00	3.50	48.00	60.00	5.50	500	2000

SQUARE EYE PLATE WITH RING,SS304 OR SS316. CSMK02

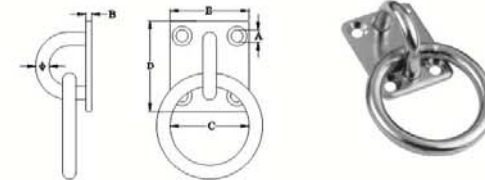


φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.00	4.30	2.50	30.00	35.00	30.00	175	700
6.00	5.30	2.50	40.00	40.00	35.00	250	1000
8.00	5.30	3.00	50.00	50.00	40.00	400	1600

OVAL EYE PLATE,SS304 OR SS316. CSMK03

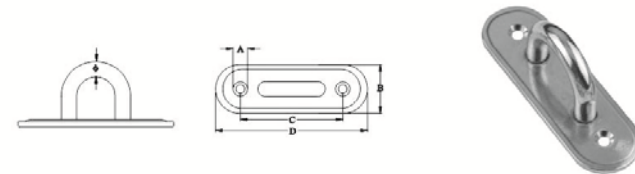

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	5.00	16.50	38.00	54.00	175	700
6.00	5.50	19.50	45.60	65.00	250	1000
8.00	6.50	26.00	55.50	81.00	400	1600
9.00	6.50	33.00	73.00	100.00	426	1700


OVAL EYE PLATE(WITH RING),SS304 OR SS316. CSMK04

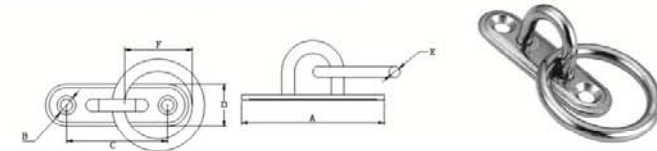

A mm	B mm	C mm	D mm	E mm	F mm
54.00	5.00	38.00	5.00	5.00	30.00
65.00	5.60	46.00	6.00	6.00	40.00
81.00	6.50	56.00	8.00	8.00	50.00


Deseen International STAINLESS HARDWARE

ROUND EYE PLATE,SS304 OR SS316. CSMK05

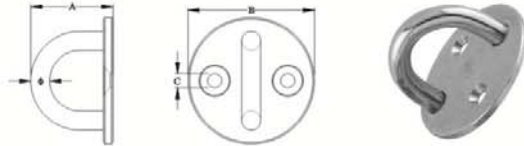


SIZE	φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5	5.00	32.00	20.00	M6	10	400
6	6.00	40.00	22.00	M8	125	500
8	8.00	50.00	26.00	M10	250	1000

ROUND EYE PLATE WITH RING,SS304 OR SS316. CSMK06

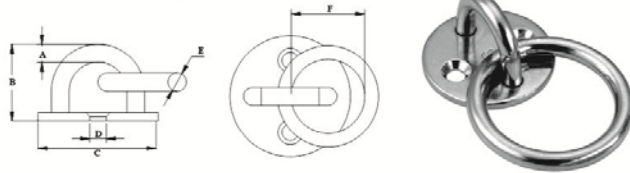


SIZE	φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5	5.00	20.50	33.00	4.50	175	700
6	6.00	25.50	40.00	4.50	250	1000
8	8.00	31.00	50.00	5.50	400	1600

ROUND EYE PLATE,SS304 OR SS316.CSMK06

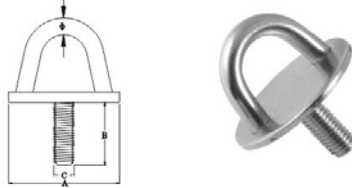


SIZE	A mm	B mm	C mm	D mm	E mm	F mm
5	5.00	20.00	33.00	4.50	5.00	30.00
6	6.00	25.00	40.00	4.50	6.00	40.00
8	8.00	31.00	50.00	5.50	8.00	50.00

ROUND EYE PLATE WITH RING,SS304 OR SS316.CSMK08

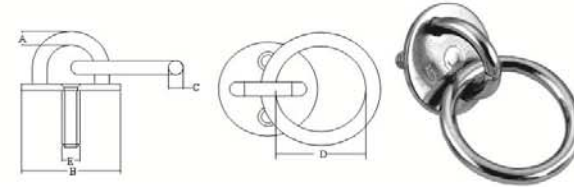


SIZE	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5	5.00	33.00	5.00	30.00	6.00	700	175
6	6.00	40.00	6.00	40.00	8.00	1000	250
8	8.00	50.00	8.00	50.00	10.00	1600	400

ROUND PLATE(HOOK TYPE),SS304 OR SS316.CSMK01

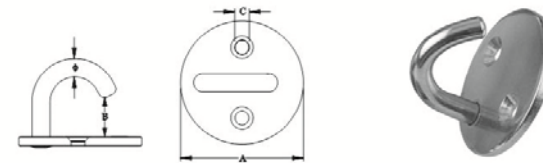

SIZE	φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5	5.00	33.00	8.50	4.50	50	200
6	6.00	40.00	12.50	4.50	55	220
8	8.00	50.00	14.50	5.50	63	250

OVAL PLATE(HOOK TYPE),SS304 OR SS316.CSMK02

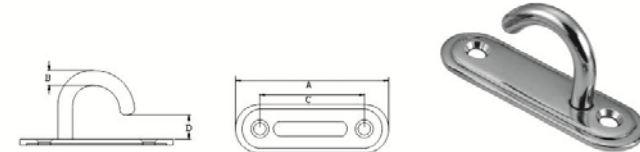

SIZE	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5	54.00	5.00	38.00	8.00	50	200
6	65.00	6.00	46.00	12.00	55	220
8	81.00	8.00	56.00	14.00	62	250
9	100.00	9.00	73.00	16.00	70	280

Deseen International STAINLESS HARDWARE



Y型底座

NO.	A mm	B mm	C mm	D mm
Y型底座	45	35	31	5



弧形座


NO.	A mm	B mm	C mm	D mm
弧形座	82	43	27	5




ROPE CLEAT,SS304 OR SS316.

ROPE CLEAT,SS304 OR SS316.

Φ mm	A mm	B mm
4.50	10.00	68.00
5.80	21.00	114.00
6.70	24.00	150.00




A mm	B mm	C mm	D mm	E mm	F mm	G mm
105.50	29.00	3.80	13.00	17.00	6.25	10.00

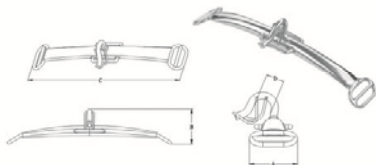

弧形座


A mm	B mm	C mm	D mm
53.50	64.00	270.00	16.00

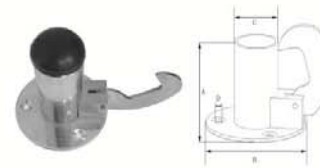

ROD TERMINAL(DOME),SS304 OR SS316.


门碰

NO.	A mm	B mm	C mm	D mm
门碰	51	58	25	4





A mm	B mm	C mm	D mm	E mm	F mm
3.30	5.50	8.00	35.00	25.00	32.50
4.30	6.30	10.00	35.00	25.00	32.00
5.30	7.50	11.50	41.00	30.00	38.00
6.30	9.08	14.00	52.00	40.00	48.50
8.40	12.50	18.00	66.00	50.00	62.00
10.50	16.08	22.00	77.00	60.00	73.00

ROD TERMINAL(DOME),SS304 OR SS316.



A mm	B mm	C mm	D mm	E mm	F mm
3.30	5.50	8.00	35.00	25.00	32.50
4.30	6.30	10.00	35.00	25.00	32.00
5.30	7.50	11.50	41.00	30.00	38.00
6.30	9.08	14.00	52.00	40.00	48.50
8.40	12.50	18.00	66.00	50.00	62.00
10.50	16.08	22.00	77.00	60.00	73.00

ROD TERMINAL(DOME),SS304 OR SS316.




Φ1 mm	Φ2 mm	Φ3 mm	A mm	B mm	C mm	D mm	E mm	F mm
63.50	32.00	9.50	3/8-16UNC	54.00	39.50	67.90	49.00	45

Deseen International

STAINLESS HARDWARE

椭圆形铝套

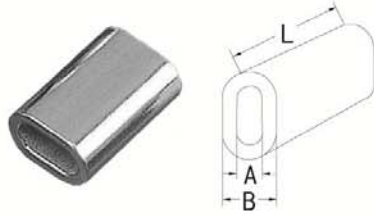

FOR CABLE DIAMETER	DIMENSIONS			WT LBS/100 PCS
	L	A	B	
1/32"	0.255"	0.092"	0.135"	0.06lbs
3/64	0.375	0.133	0.201	0.16
1/16	0.375	0.137	0.229	0.15
3/32	0.375	0.184	0.298	0.27
1/8	0.375	0.233	0.380	0.43
5/32	0.720	0.322	0.500	1.41
3/16	0.875	0.352	0.564	2.33
7/32	0.880	0.430	0.667	3.13
1/4	1.130	0.454	0.716	4.76

ALUMINIUM FERRULES SPECIFICATION EN 13411-3(DIN 3093)


德式椭圆形铝套



FERRULE CODE	A mm	B mm	S mm	L mm	WEIGHT Kgs/1000Pcs	L' (mm) GB 696-93
1	1.2	2.4	0.65	0.65	0.098	---
1.5	1.7	3.4	0.75	0.75	0.176	---
2	2.2	4.4	0.85	0.85	0.285	---
2.5	2.7	5.4	1.05	1.05	0.439	---
3	3.3	6.6	1.25	1.25	0.907	---
3.5	3.8	7.6	1.5	1.5	1.18	---
4	4.4	8.8	1.7	1.7	1.63	---
4.5	4.9	9.8	1.9	1.9	2.39	---
5	5.5	11.0	2.1	2.1	3.62	---
6	6.5	13.2	2.5	2.5	5.87	25
6.5	7.2	14.4	2.7	2.7	7.18	---
7	7.8	15.6	2.9	2.9	9.83	30
8	8.8	17.6	3.3	3.3	12.96	34
9	9.9	19.8	3.7	3.7	18.94	38
10	10.9	21.8	4.1	4.1	24.09	42
11	12.1	24.2	4.5	4.5	35.35	47
12	13.2	26.4	4.9	4.9	44.18	50
13	14.2	28.4	5.4	5.4	59.86	55
14	15.3	30.6	5.8	5.8	73.5	59
16	17.5	35.0	6.7	6.7	111	67
18	19.6	39.2	7.6	7.6	156	76
20	21.7	43.4	8.4	8.4	217	84
22	24.3	48.6	9.2	9.2	292	92
24	26.4	52.8	10.0	10.0	376	101
26	28.5	57.0	10.9	10.9	481	109
28	31.0	62.0	11.7	11.7	603	118
30	33.1	66.2	12.5	12.5	739	126
32	35.2	70.4	13.4	13.4	897	134
34	37.8	75.6	14.2	14.2	1077	143
36	39.8	79.6	15.0	15.0	1275	152
38	41.9	83.8	15.8	15.8	1503	160
40	44.0	88.0	16.6	16.6	1734	168
42	46.2	92.4	17.5	17.5	2024	---
44	48.4	96.8	18.3	18.3	2314	184
46	50.6	101.2	19.2	19.2	2662	---
48	52.8	105.6	20.0	20.0	3010	200
50	55.0	110.0	20.8	20.8	3412	---
52	57.2	114.4	21.6	21.6	3813	216
54	59.4	118.8	22.5	22.5	4293	---
56	61.6	123.2	23.3	23.3	4772	232
58	63.8	127.6	24.2	24.2	5326	---
60	66.0	132.0	25.0	25.0	5880	---

ALUMINIUM OVAL SLEEVES

美式椭圆形铝套

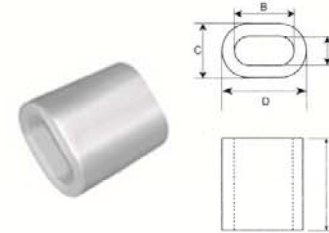

SIZE	A in	B in	C in	D in	L in	WEIGHT Lbs/100Pcs
1/4"	19/64	19/32	17/32	27/32	1	2.3
5/16"	3/8	3/4	21/32	1 1/32	1 17/64	4.3
3/8"	7/16	27/32	3/4	1 5/32	1 3/8	5.3
7/16"	1/2	1	29/32	1 13/32	1 23/32	11
1/2"	19/32	1 11/64	1 1/32	1 5/8	1 15/16	16.5
9/16"	23/32	1 3/8	1 7/32	1 57/64	2 7/32	22
5/8"	3/4	1 1/2	1 3/8	2 3/32	2 1/2	32
3/4"	53/64	1 11/16	1 1/2	2 3/8	2 7/8	52
7/8"	61/64	1 7/8	1 11/16	2 5/8	3	67
1"	1 3/32	2 7/32	1 31/32	3 3/32	3 3/4	125
1 1/8"	1 9/32	2 9/16	2 5/16	3 19/32	4 9/32	172
1 1/4"	1 13/32	2 25/32	2 1/2	3 7/8	4 7/16	214
1 1/2"	1 21/32	3 19/64	3 1/8	4 3/4	5 35/64	390

ALUMINIUM HOURGLASS SLEEVES 美式八字形铝套



SIZE		A		B		C		D		L		WEIGHT Kgs/1000 Pcs
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
3/64	1.19	1/16	1.59	1/8	3.18	9/64	3.6	13/64	5.2	3/8	9.5	0.276
1/16	1.58	5/64	1.98	5/32	3.97	11/64	4.4	1/4	5.4	3/8	9.5	0.433
5/64	1.98	3/32	2.38	3/16	4.76	13/64	5.2	5/16	7.9	3/8	9.5	0.645
3/32	2.38	1/8	3.18	1/4	6.35	9/32	7.1	13/32	10.3	1/2	12.7	1.45
1/8	3.18	5/32	3.97	5/16	7.94	11/32	8.7	1/2	12.7	5/8	16	2.70
5/32	3.97	3/16	4.76	3/8	9.53	3/8	9.53	9/16	14.3	11/16	17	3.67
3/16	4.76	7/32	5.56	7/16	11.11	7/16	11.11	21/32	16.7	1	25	7.18
7/32	5.56	1/4	6.35	1/2	12.70	1/2	12.7	3/4	19	1-1/16	26	10.00
1/4	6.35	9/32	7.14	9/16	14.29	17/32	13.5	13/16	20.6	1-1/8	28	11.76
9/32	7.14	5/16	7.94	5/8	15.88	9/16	14.3	7/8	22.2	1-3/16	30	13.62
5/16	7.94	3/8	9.53	23/32	19.05	11/16	17.5	1-1/32	26.2	1-1/4	32	20.94
3/8	9.53	7/16	11.11	27/32	22.23	3/4	19.1	1-5/32	29.4	1-7/16	36	28.18
7/16	11.11	1/2	12.7	1	25.40	15/16	23.8	1-7/16	36.5	1-11/16	42	52.00
1/2	12.7	9/16	14.29	1-1/8	28.58	1-1/16	27	1-5/8	41.3	2	50	80.15
9/16	14.29	5/8	25.88	1-1/4	31.75	1-1/8	28.6	1-3/4	44.5	2-1/8	54	99.88
5/8	15.88	11/16	17.46	1-3/8	34.93	1-1/4	31.8	1-15/16	49.2	2-1/2	64	139.78

Deseen International STAINLESS HARDWARE

3.中长环链条 MEDIUM LINK CHAIN

LINK SPECIFICATION				TEST LOAD	NET WT PER 200FT (kg)	
D		L	W			
in	mm	mm	mm	kg	B.F.	B.D.G.
1/8	3.20	20	12	200	10.80	11.00
5/32	4.00	23	15	300	17.40	18.00
3/16	4.70	25	18	400	24.40	25.00
7/32	5.50	26	19	550	34.00	35.00
1/4	6.35	26	23	750	48.80	50.00
5/16	7.94	32	29	1200	76.00	78.00
3/8	9.50	35	35	1700	111.00	114.00
7/16	11.11	38	38	2300	154.00	158.00
1/2	12.70	50	45.5	3000	194.00	200.00
5/8	15.80	60	56.7	4700	303.00	312.00
3/4	19.00	76	69	6800	432.00	445.00
7/8	22.20	90	80	9250	586.00	603.00
1	25.40	105	95	12150	770.00	792.00



CSLT10

43级高强度链条 HIGH TEST CHAIN ASTM80(G43)

TRADE SIZE	MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST		MAX LENGTH PER 100 LINKS		MAX WEIGHT PER 100 FEET	
	in	mm	lbs	kg	lbs	kn	in	m	lbs	kg
1/4	0.281	7.1	2600	1180	4300	19.1	98	2.49	84	38
5/16	0.343	8.7	3900	1770	6400	28.5	110	2.79	120	54
3/8	0.406	10.3	5400	2450	8900	39.6	134	3.40	176	80
7/16	0.468	11.9	7200	3260	11900	52.9	140	3.55	230	104
1/2	0.531	13.5	9200	4170	15300	68.1	150	4.06	300	136



CSLT10

70级运输链条 TRANSPORT CHAIN ASTM80(G70)

TRADE SIZE	MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST		MAX LENGTH PER 100 LINKS		MAX WEIGHT PER 100 FEET	
	in	mm	lbs	kg	lbs	kn	in	m	lbs	kg
1/4	0.281	7.1	3150	1430	6300	28.0	98	2.49	84	38
5/16	0.343	8.7	4700	2130	9400	41.8	110	2.79	120	54
3/8	0.406	10.3	6600	3000	13200	58.7	134	3.40	176	80
1/2	0.531	13.5	11300	5130	22600	100.5	160	4.06	300	136



CSLT10

43级高强度链条 HIGH TEST CHAIN NACM96

NORMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT (MAX)		PROOF TEST (MIN)		BREAKING FORCE MIN		INSIDE LENGTH (MAX)		INSIDE WIDTH (MIN)	
mm	in	mm	in	kg	lb	kn	lb	kn	lb	mm	in	mm	in
7.0	1/4	7.0	0.276	1180	2600	17.3	3900	34.6	7800	31.5	1.24	9.8	0.38
8.7	5/16	8.7	0.343	1770	3900	26.0	5850	52.0	11700	32.8	1.29	11.2	0.44
10.0	3/8	10.3	0.406	2450	5400	36.0	8100	72.0	16200	35.0	1.38	14.0	0.55
11.9	7/16	11.9	0.468	3270	7200	48.0	10800	96.0	21600	41.6	1.64	16.6	0.65
13.0	1/2	13.5	0.531	4170	9200	61.3	13800	122.6	27600	45.5	1.79	18.2	0.72



CSLT10

70级运输链条 TRANSPORT CHAIN NACM96(G70)

NORMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT (MAX)		PROOF TEST (MIN)		INSIDE LENGTH (MAX)		INSIDE WIDTH (MIN)	
mm	in	mm	in	kg	lb	kn	lb	mm	in	mm	in
7.0	1/4	7.0	0.281	1430	3150	28.0	6300	31.8	1.24	9.8	0.38
8.7	5/16	8.7	0.343	2130	4700	41.8	9400	32.8	1.29	11.2	0.44
10.0	3/8	10.3	0.406	2990	6600	58.7	13200	35.0	1.38	14.0	0.55

Deseen International STAINLESS HARDWARE



CSLT07

韩国标准链条 KOREAN STANDARD LINK CHAIN

NOMINAL SIZE	MATERIAL SIZE	INSIDE LENGTH	INSIDE WIDTH	LENGTH PER PC	WEIGHT PER PC
mm	m/m	mm	m/m	m	kg
4	3.9	34.3	6.2	30	7.26
4.5	4.5	44.4	9.2	30	9.46
5	4.8	45.0	11.0	30	11.31
6	6.0	47.0	12.0	30	18.00
7	6.8	50.0	11.4	15	11.19
12	12.0	50.0	18.0	15	42.00
15	14.8	64.0	23.0	15	61.44
19	19.0	75.0	25.0	10	71.00




CSLT08

挪威标准链条 NORWEGIAN STANDARD LINK CHAIN

SIZE	INSIDE LENGTH	INSIDE WIDTH	WEIGHT PER M	LENGTH PER PC	LENGTH PER REEL
mm	mm	mm	kg	m	m
3.5	18.0	5.5	0.25	100	100
5.0	22.0	8.5	0.50	100	60
6.5	24.0	10.0	0.85	50	37
8.0	25.5	11.0	1.35	50	23
10.0	32.0	13.0	2.10	30	15
11.0	35.0	16.0	2.55	30	
13.0	39.0	18.0	3.70	30	
16.0	48.0	23.0	5.70	30	
19.0	57.0	27.0	8.00	30	

澳大利亚标准链条 AUSTRALIAN STANDARD LINK CHAIN



CSLT09

SHORT LINK CHAIN (短环)

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G.
mm	MT	mm	mm	mm	pc	m	m
6	0.32	6.3	18.9	21.5	52.9	114	108
8	0.53	8.0	24.0	27.5	41.7	70.5	67.0
10	0.83	10.0	29.5	33.5	33.9	45.2	42.9
12	1.50	12.5	37.5	40.6	26.7	29.5	28.0
16	2.31	16	47.0	54.0	21.3	17.6	16.7

CSLT09

SHORT LINK CHAIN (短环)

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G.
mm	MT	mm	mm	mm	pc	m	m
3	0.06	3.15	15.7	13.1	63.8	511	498
4	0.11	4.00	18.6	16.0	53.9	320	305
5	0.19	5.00	22.0	19.4	45.4	203	193
6	0.32	6.30	26.1	23.5	37.8	129	120
8	0.53	8.00	32.2	29.5	31.0	77.8	74.1
10	0.83	10.0	39.1	36.2	25.0	48.5	47.1
12	1.35	12.0	46.0	44.0	21.7	34.0	33.3
13	1.50	13.0	49.1	46.1	20.3	29.7	27.7
16	2.31	16.0	59.6	56.5	16.8	20.2	18.2
20	3.67	20.0	73.3	70.0	13.6	12.3	11.6
24	5.31	24.0	87.0	83.6	11.5	8.5	8.04

Deseen International STAINLESS HARDWARE



CSLT05

5.美国机制直型链条 NACM90 MACHINE CHAIN STRAIGHT LINK

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD (MAX)		PROOF TEST (MIN)		NOMINAL INSIDE LENGTH		NOMINAL INSIDE WIDTH	
mm	No.	mm	in	kg	lbs	kn	lbs	mm	in	mm	in
3.0	4	3.0	0.120	98	215	1.91	430	14.0	0.55	5.3	0.21
3.4	3	3.4	0.135	122	270	2.40	540	15.0	0.59	6.1	0.24
3.8	2	3.8	0.148	147	325	2.89	650	15.5	0.61	6.6	0.26
4.1	1	4.1	0.162	177	390	3.47	780	16.0	0.63	7.1	0.28
4.5	1/0	4.5	0.177	211	465	4.14	930	18.8	0.74	7.9	0.31
4.9	2/0	4.9	0.192	247	545	4.85	1090	19.8	0.78	8.6	0.34
5.3	3/0	5.3	0.207	288	635	5.65	1270	21.6	0.85	9.1	0.36
5.5	4/0	5.5	0.218	318	700	6.23	1400	25.1	0.99	9.6	0.38
6.4	5/0	6.4	0.250	420	925	8.23	1850	27.2	1.07	11.2	0.44



CSLT05

6.美国机制扭曲链 NACM90 MACHINE CHAIN TWISTLINK

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD (MAX)		NOMINAL INSIDE LENGTH		NOMINAL INSIDE WIDTH	
mm	No.	mm	in	kg	lbs	mm	in	mm	in
3.0	4	3.0	0.120	93	205	13.1	0.52	4.3	0.17
3.4	3	3.4	0.135	116	255	14.2	0.56	5.1	0.20
3.8	2	3.8	0.148	141	310	14.7	0.58	5.3	0.21
4.1	1	4.1	0.162	168	370	15.0	0.59	6.1	0.24
4.5	1/0	4.5	0.177	200	440	17.2	0.68	6.6	0.26
4.9	2/0	4.9	0.192	236	520	18.5	0.73	7.1	0.28
5.3	3/0	5.3	0.207	274	605	20.3	0.80	7.9	0.31
5.5	4/0	5.5	0.218	304	670	22.5	0.89	8.1	0.32
6.4	5/0	6.4	0.250	400	880	25.3	1.00	9.4	0.37



CSLT05

7.美国盘绕直型链条 NACM90 COIL CHAIN STRAIGHT LINK

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD (MAX)		PROOF TEST (MIN)		NOMINAL INSIDE LENGTH		NOMINAL INSIDE WIDTH	
mm	No.	mm	in	kg	lbs	kn	lbs	mm	in	mm	in
3.0	4	3.0	0.120	93	205	1.82	410	28.1	1.11	5.32	0.21
3.4	3	3.4	0.135	116	255	2.27	510	29.8	1.17	6.09	0.24
3.8	2	3.8	0.148	141	310	2.76	620	29.9	1.18	6.59	0.26
4.1	1	4.1	0.162	168	370	3.29	740	31.7	1.25	7.10	0.28
4.5	1/0	4.5	0.177	200	440	3.91	880	31.7	1.25	7.86	0.31
4.9	2/0	4.9	0.192	236	520	4.63	1040	31.9	1.26	8.62	0.34
5.3	3/0	5.3	0.207	274	605	5.38	1210	32.9	1.30	9.13	0.36
5.5	4/0	5.5	0.218	304	670	5.96	1340	35.2	1.39	9.64	0.38
6.4	5/0	6.4	0.250	399	880	7.83	1760	38.5	1.52	11.20	0.44



CSLT06

韩国标准链条 KOREAN STANDARD LINK CHAIN

NOMINAL SIZE	MATERIAL SIZE	INSIDE LENGTH	INSIDE WIDTH	LENGTH PER PC	WEIGHT PER PC
mm	m/m	m/m	m/m	m	kg
3	3.0	23.0	5.3	30	4.50
4	4.0	22.0	7.5	30	9.00
5	4.8	23.7	8.3	30	12.74
6	5.8	27.3	10.0	30	18.86
7	7.0	31.0	12.0	15	14.14
8	7.8	35.0	13.7	15	17.23
9	8.8	39.0	15.2	15	22.13
12	12.0	38.0	18.0	15	45.00
15	15.0	45.0	23.0	15	75.45
16	16.0	53.0	23.0	15	76.41
19	19.0	58.0	25.0	10	78.28

Deseen International STAINLESS HARDWARE



美国标准链条 ASTM80 STANDARD LINK CHAIN. CSLT05

LASTM-80标准30级链条 PROOF COIL CHAIN ASTM80(G30)

TRADE SIZE	MATERIAL DIAMETER		WORKING LOAD LIMIT		PROOF TEST		MAX LENGTH PER 100 LINKS		MAX WEIGHT PER 100 FEET	
	in	mm	lbs	kg	lbs	kn	in	m	lbs	kg
3/16	0.218	5.5	750	340	1500	6.7	99	2.51	42	19
1/4	0.281	7.1	1250	570	2500	11.1	104	2.84	76	34
5/16	0.343	8.7	1900	860	3800	16.9	114	2.89	115	52
3/8	0.406	10.3	2650	1200	5300	23.6	128	3.25	166	75
7/16	0.468	11.9	3500	1590	7000	31.1	142	3.60	225	102
1/2	0.531	13.5	4500	2040	9000	40.0	156	3.96	289	131
5/8	0.656	16.7	6900	3130	13800	61.4	194	4.92	425	193
3/4	0.781	19.8	9750	4420	19500	86.7	220	5.59	612	278



美国标准链条 NACM84/90 STANDARD LINK CHAIN.CSLT05

NACM84/90标准30级链条 PROOF COIL CHAIN NACM84/90(G30)

NOMINAL SIZE		MATERIAL DIAMETER		WORKING LOAD LIMIT (MAX)		PROOF TEST (MIN)		INSIDE LENGTH (MAX)		INSIDE WIDTH (MIN)	
mm	in	mm	in	kg	lb	kn	lb	mm	in	mm	in
4.0	1/8	4.0	0.156	170	375	3.6	800	23.9	0.94	6.4	0.25
5.5	3/16	5.5	0.217	365	800	7.2	1600	24.8	0.98	7.7	0.30
7.0	1/4	7.0	0.276	580	1300	11.6	2600	31.5	1.24	9.8	0.38
8.0	5/16	8.0	0.315	860	1900	15.1	3400	32.8	1.29	11.2	0.44
10.0	3/8	10.0	0.394	1200	2650	23.6	5300	35.0	1.38	14.0	0.55
13.0	1/2	13.0	0.512	2030	4500	39.8	8950	45.5	1.79	18.2	0.72
16.0	5/8	16.0	0.630	3130	6900	60.3	13600	56.0	2.20	20.0	0.79
20.0	3/4	20.0	0.787	4800	10600	94.3	21200	70.0	1.76	25.0	0.98
22.0	7/8	22.0	0.866	5810	12800	114.1	25800	77.0	3.03	27.5	1.08
25.0	1	25.0	1.020	8140	17900	159.1	35800	90.9	3.58	31.7	1.25



CSLT05

美国盘绕扭曲链 NACM90 COIL CHAIN TWIST LINK

TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD (MAX)		NOMINAL INSIDE LENGTH		NOMINAL INSIDE WIDTH	
mm	No.	mm	in	kg	lbs	mm	in	mm	in
3.0	4	3.0	0.120	88	195	27.6	1.09	4.56	0.18
3.4	3	3.4	0.135	109	240	28.9	1.14	5.32	0.21
3.8	2	3.8	0.148	134	295	29.1	1.15	5.58	0.22
4.1	1	4.1	0.162	159	350	30.9	1.22	6.34	0.25
4.5	1/0	4.5	0.177	188	415	30.9	1.22	6.85	0.27
4.9	2/0	4.9	0.192	225	495	31.4	1.24	7.36	0.29
5.3	3/0	5.3	0.207	261	575	31.9	1.26	8.12	0.32
5.5	4/0	5.5	0.218	288	635	34.0	1.34	8.32	0.33
6.4	5/0	6.4	0.250	379	835	37.3	1.47	9.65	0.38



CSLT05

美国标准穿心链 NACM90 PASSING LINK CHAIN


TRADE SIZE		MATERIAL DIAMETER		WORKING LOAD (MAX)		PROOF TEST (MIN)		BREAKING FORCE(MIN)		NOMINAL INSIDE LENGTH		NOMINAL INSIDE WIDTH	
mm	No.	mm	in	kg	lbs	kn	lbs	kn	lbs	mm	in	mm	in
4.9	2/0	4.9	0.192	204	450	4.00	900	8.01	1800	22.2	0.875	11.9	0.47
5.5	4/0	5.5	0.218	272	600	5.34	1200	10.68	2400	22.2	0.875	12.7	0.50

Deseen International


STAINLESS HARDWARE

CSLT01

德国标准DIN 5685 A/C 短/长环链条
DIN 5685A/C SHORT/LONG LINK CHAIN

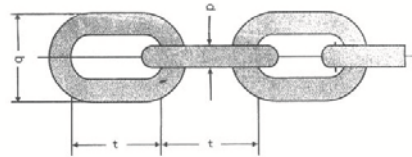

SIZE d mm	INSIDE LENGTH t mm	OUTSIDE WIDTH h mm	WEIGHT PER 100m kg	BREAKING LOAD n	TYPE OF LINK
2	12 22	8	7 6	500	A C
2.5	14 24	10	11 10	750	A C
3	16 26	12	16.5 15	1120	A C
3.5	18 28	14	22.5 20	1500	A C
4	19 32	16	30 27	2000	A C
4.5	20 34	18	39.5 35	2500	A C
5	21 35	20	50 43	3150	A C
5.5	23 38.5	22	60.5 52	3800	A C
6	24 42	24	73 63	4500	A C
6.5	26 45.5	26	86 74	5400	A C
7	28 49	28	100 86	6000	A C
8	32 52	32	130 110	8000	A C
8.5	34 56	34	149 125	9000	A C
9	36 59	36	165 141	10000	A C
10	40 65	40	205 175	12500	A C
11	44 72	44	150 211	15000	A C
12	48 78	48	290 255	18000	A C
13	52 82	52	345 295	21200	A C




CSLT02

德国标准DIN 766标准链条 DIN 766 LINK CHAIN

SIZE d mm		INSIDE LENGTH l			INSIDE WIDTH b1	OUTSIDE WIDTH b2	LENGTH PER 10 LINKS			WEIGHT PER M
mm	± mm	mm	+ mm	- mm	mm	mm	mm	+ mm	- mm	kg
3	0.2	14.5	0.2	0.2	4.5	11	159.5	1.4	0.7	0.16
4	0.2	16	0.3	0.2	5	13.7	176	2.1	1.1	1.32
5	0.2	18.5	0.4	0.2	6	17	203.5	2.4	1.2	0.5
6	0.2	18.5	0.4	0.2	7.2	20.2	203.5	2.4	1.2	0.8
7	0.3	22	0.4	0.2	8.4	23.8	242	3.0	1.4	1.1
8	0.3	24	0.4	0.2	9.6	27.2	264	3.2	1.5	1.4
9	0.4	27	0.5	0.3	10.8	30.6	297	3.6	1.8	1.8
10	0.4	28	0.5	0.3	12	34	308	3.7	1.9	2.2
11	0.4	31	0.5	0.3	13.2	37.4	341	4.0	2.0	2.7
12	0.3	36	0.6	0.3	14.4	40.8	396	4.4	2.2	3.1
13	0.5	36	0.6	0.3	15.6	44.2	396	4.6	2.4	3.8
14	0.6	41	0.7	0.4	16.8	47.6	451	5.4	2.7	4.4
16	0.6	45	0.8	0.4	19.2	54.4	495	6.0	3.0	5.7
18	0.9	50	0.8	0.4	21.6	61.2	550	6.6	3.3	7.3
19	0.4	53	0.9	0.4	22.8	64.4	583	7.0	3.7	7.97
20	1.0	56	1.0	0.5	24.0	68.0	616	7.4	3.7	9
23	1.2	64	1.1	0.5	27.6	78.2	704	8.4	4.2	12
26	1.3	73	1.2	0.6	31.2	88.4	803	9.6	4.8	15
28	1.4	78	1.3	0.65	33.8	95.2	858	10.2	5.1	18
30	1.5	84	1.4	0.7	41	102	924	11.0	5.5	19.5
32	1.6	90	1.5	0.75	43	108.8	990	11.8	5.9	23.0

Deseen International

STAINLESS HARDWARE



CSLT03

德国标准DIN 763链条 DIN 763 LINK CHAIN

SIZE d		INSIDE LENGTH t		OUTSIDE WIDTH b		WORKING LOAD	TEST LOAD	WEIGHT PER M
mm	± mm	mm	± mm	mm	± mm	kg	n	kg
3	0.5	26	1.2	12	0.6	55	1050	0.15
4		32	1.5	16	0.8	100	2000	0.27
5		35	1.8	20	1.0	160	3150	0.43
6		42	2.0	24	1.2	224	4500	0.63
7		49	2.5	28	1.4	300	6000	0.86
8		52	2.5	32	1.6	400	8000	1.10
9		59	3.0	36	1.8	530	10500	1.41
10		65	3.2	40	2.0	630	12500	1.75
11	1	72	3.4	44	2.0	790	15800	2.11
12		78	3.6	48	2.3	940	18800	2.55
13		82	4.0	52	2.5	1000	21200	2.95
16		100	5.0	64	3.2	1600	33000	4.45
18		113	5.2	70	3.2	2120	42300	5.65
19		119	5.6	72	3.4	2370	47300	6.25
20		120	6.0	75	3.8	2500	50000	7.00
22		127	6.0	82	4.0	3170	63300	8.55
25		140	6.6	88	4.2	4090	81700	10.90
28		152	7.0	96	4.7	6000	120000	13.90
32		171	7.8	108	5.2	8000	160000	18.20



CSLT04

德国标准DIN 764链条 DIN 764 LINK CHAIN

SIZE d		INSIDE LENGTH t		INSIDE WIDTH b1	OUTSIDE WIDTH b2	LENGTH PER 11 LINKS		WEIGHT PER 100M	TEST LOAD
mm	± mm	mm	± mm	mm	mm	mm	± mm	kg	kg
4	0.20	16	0.30 0.20	5	14	176	1.60 0.90	31.3	400
5	0.20	18	0.40 0.20	7	18.2	198	1.80 1.00	51.4	680
6	0.20	21	0.50 0.20	8	21.5	231	2.00 1.10	74.0	850
8	0.20	28	0.50 0.30	11	29	308	2.20 1.20	131.5	1680
10	0.30	35	0.60 0.30	14	36	385	2.70 1.50	200	2630
13	0.40	45	0.70 0.40	18	47	495	3.50 2.00	350	4200
16	0.50	56	0.90 0.50	22	58	616	4.30 2.50	520	6700
18	0.80	63	1.00 0.50	24	65	693	4.70 2.80	650	8400
20	1.00	70	1.10 0.60	27	72	770	5.40 3.20	820	10000
23	1.20	80	1.30 0.70	31	83	880	6.20 3.50	1100	13000
26	1.30	91	1.50 0.80	35	94	1001	7.00 4.00	1400	16000

Deseen International

STAINLESS HARDWARE

CSLT09

3.SHORT LINK CHAIN(短环)

CHAIN SIZE	WORKING LOAD	LINK DIMENSION			LINKS PER M	LENGTH PER 100KG	
		S	R	F		B.F.	H.D.G
mm	MT	mm	mm	mm	pc	m	m
5	0.19	5.00	29.3	21.8	34.1	217.0	206.0
6	0.32	6.30	34.5	26.1	29.0	135.0	128.0
8	0.53	8.00	41.2	31.9	24.3	82.2	78.1
10	0.83	10.00	49.0	38.7	20.4	52.9	50.2

CSLT11

日本标准 JAPANESE STANDARD SS304/316




DIA	INSIDE LENGTH	INSIDE WIDTH	WEIGHT/M
mm	mm	mm	kg
2	12	3.5	0.07
3	24	5	0.15
3	19	5	0.16
4	26	6	0.27
4	20	6	0.29
5	27	7	0.44
5	20	7	0.49
5.5	30	8	0.54
5.5	24	10	0.60
6	31	9	0.65
6	24	9	0.72
7	37	10	0.88
7	28	10	0.96
8	38	11	1.18
8	32	12	1.27
9	39	13	1.55
9	36	14	1.61
10	42	15	1.95
12	54	20	2.77
12	48	19	2.88

英制普通链条

ORDINARY MILD STEEL LINK CHAIN

CSLT12

1.长环链条 LONG LINK CHAIN

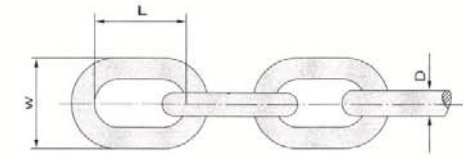

LINK SPECIFICATION				TEST LOAD	NET WT PER 200FT (kg)	
D		L	W		B.F.	H.D.G
in	mm	mm	mm	kg		
1/8	3.20	23	12	200	10.40	10.70
5/32	4.00	27	15	300	16.60	17.50
3/16	4.70	31	17	400	22.40	23.30
7/32	5.50	32	19	550	32.00	33.00
1/4	6.35	33	21	750	43.50	44.80
5/16	7.94	48	31	1200	68.00	70.00
3/8	9.50	60	37	1700	96.00	99.00
7/16	11.11	71	41	2300	126.00	129.00
1/2	12.70	85	48.5	3000	167.00	172.00
5/8	15.80	114	61.5	4700	256.00	264.00
3/4	19.00	125	75	6800	381.00	392.00
7/8	22.20	140	88	9250	527.00	543.00
1	25.40	155	100	12150	696.00	716.00

2.短环链条 SHORT LINK CHAIN

LINK SPECIFICATION				TEST LOAD	NET WT PER 200FT (kg)	
D		L	W		B.F.	H.D.G
in	mm	mm	mm	kg		
1/8	3.20	16	12	200	11.4	11.74
5/32	4.00	18.5	14.5	300	18.60	19.00
3/16	4.70	19	17	400	26.20	27.00
7/32	5.50	20	19	550	36.80	38.00
1/4	6.35	22	21	750	50.00	51.50
5/16	7.94	26	26	1200	80.00	82.40
3/8	9.50	28	32	1700	122.00	125.70
7/16	11.11	33	36	2300	164.00	169.00
1/2	12.70	39	43	3000	210.00	216.00
5/8	15.80	45	53	4700	334.00	344.00
3/4	19.00	55	63	6800	485.00	499.00
7/8	22.20	64	74	9250	656.00	675.00
1	25.40	73	84	12150	870.00	896.00

Deseen International

STAINLESS HARDWARE

钢丝绳典型结构 Typical Rope Constructions EN12385-4(DIN)

结构 Constr.	公称直径/mm Dia.(mm)	允许偏差/mm Tolerance	参考重量 (Kg/100m) Appro Weight (Kg/100m)	最小破断拉力/KN MBL/KN
1×7	0.3	+0.08 0	0.05	0.075
	0.4		0.08	0.133
	0.6		0.18	0.3
	0.8		0.32	0.533
	1		0.51	0.832
	1.2		0.73	1.198
	1.5		1.14	1.872
	1.8		1.64	2.696
	2		2.02	3.328
	2.5		3.16	5.201
	3		4.55	7.489
	4	+0.07,0	8.08	13.314
	0.8		0.31	0.53
1×19	1	+0.08 0	0.49	0.82
	1.5		1.11	1.85
	1.8		1.6	2.67
	2		1.98	3.3
	2.5		3.09	5.16
	3		4.45	7.43
	4	+0.07 0	7.92	13.21
	5	+0.06,0	12.37	20.64
	6		17.82	29.72
	8	+0.05 0	31.68	52.85
	10		49.5	82.58
	12	+0.07,0	71.28	118.91
	5		12.23	20.41
	6	+0.06,0	17.6	29.39
1×37	8	+0.05 0	31.3	52.25
	10		48.9	81.64
	12		70.42	117.56
	14		95.84	160.01
	16		125.18	208.99
	18		158.44	264.51
	20		195.6	326.56
	25		313.3	522.5
7×7	0.5	+0.08 0	0.09	0.14
	0.8		0.25	0.29
	1		0.39	0.56
	1.2		0.56	0.81
	1.5		0.88	1.27
	1.8		1.27	1.83
	2	+0.07 0	1.57	2.25
	2.5		2.45	3.52
	3		3.53	5.07
	4		6.28	9.01
	5	+0.06,0	9.82	14.09
	6		14.14	20.29
	8	+0.05 0	25.15	36.07
	10		39.3	56.36
	12	+0.05 0	56.59	81.16
	15		81.16	118.91


钢丝绳典型结构 Typical Rope Constructions

结构 Constr.	公称直径/mm Dia.(mm)	允许偏差/mm Tolerance	参考重量 (Kg/100m) Appro Weight (Kg/100m)	最小破断拉力/KN MBL/KN
7×19	1.2	+0.08 0	0.54	0.75
	1.5		0.85	1.17
	1.8		1.23	1.68
	2		1.52	2.08
	2.5		2.38	3.25
	3		3.42	4.69
	4	+0.07 0	6.09	8.33
	5	+0.06 0	9.52	13.03
	6		13.71	18.76
	7	+0.05 0	18.66	25.54
	8		24.38	33.35
	10		38.1	52.12
	12		54.86	75.05
	14		74.67	102.16
	16		97.53	133.43
	18		123.44	168.88
	20		152.4	208.49
6×19SW+IWRC	24	+0.05 0	219.45	300.23
	26		257.55	352.35
	8	+0.05 0	25.92	35.77
	10		40.5	55.89
	12		58.32	80.48
	14		79.38	109.55
	16		103.68	143.08
	18		131.22	181.09
6×36SW+IWRC	20	+0.05 0	162	223.57
	8		26.75	35.77
	10		41.8	55.89
	12		60.19	80.48
	14		81.93	109.55
	16		107.01	143.08
	18		135.43	--
	20		167.2	--
	22		202.31	--
	24		240.77	--
19×7	26	+0.07 0	282.57	--
	28		327.71	--
	4	+0.06 0	6.43	7.61
	5		10.05	13.58
	6		14.47	19.56
	7	+0.05 0	19.69	26.62
	8		25.73	34.77
	10		40.2	54.32
	12		57.89	78.22
	14		78.79	106.47
	16		102.91	139.06
	18		130.25	176
	20		160.8	217.29


Deseen International

STAINLESS HARDWARE


钢丝绳典型结构 Typical Rope Constructions

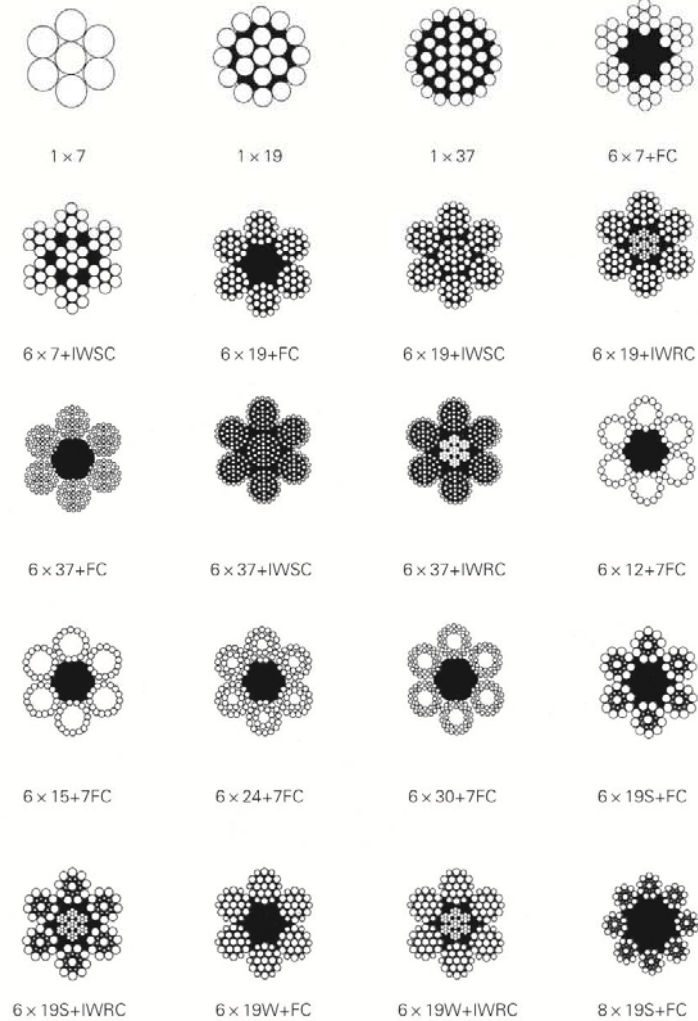

钢丝绳典型结构 Typical Rope Constructions

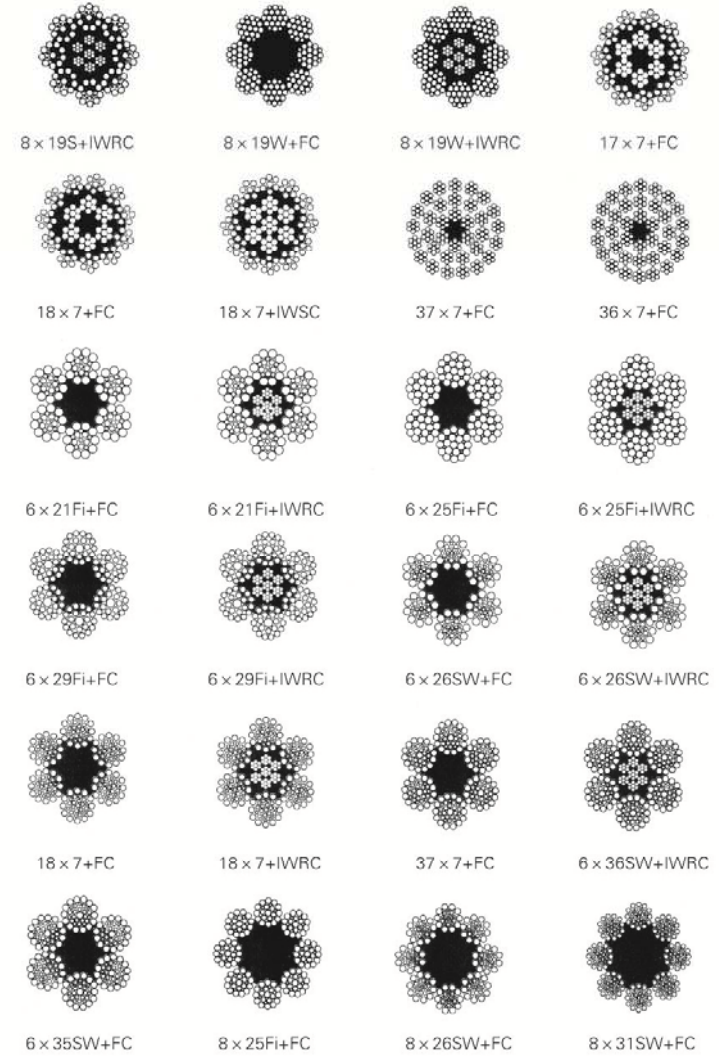

Deseen International STAINLESS HARDWARE




快速接头A

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
A		16.5	21	24	28.8	36	45.8	56.5	73.6	101	150
B		32	32	36.6	45.5	53.4	63	75.7	91.5	119.5	176
C		38	38	48	56	58	61	87	71	83.6	86
D		32.5	32.5	39	48	56	67.5	83	97	123.5	190



快速接头B

DIM	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	1 1/2"
A	14	19	24	28	35	48	58	72	93	122	145
B	52	52	64	72	73	80	90	94	101	102	118
E	32	32	40	48	49	54	59	60	62	52	72
G	53	54	61	79	83	94	109	130	158	104	219



快速接头C

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
A		110	110	123	179	186.5	197.5	208.5	232	260	356
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
C		42	42	47	58	66.5	78	92	109	138	199
D		15	21.4	27.4	34	40.5	53	66.5	79.4	104.8	157
E		8	14	20	25	31	43	55	67	92	140
K		43	51	60	61	64	78	85	102	110	141
L		75	83	100	109	113	132	144	162	172	213



快速接头D

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
	mm	15	20	25	32	40	50	65	80	100	125	150
A		16	19	26	33	39	50	61	75	92	122	145
B		52	52	62	68	71	78	85	90	96	102	118
E		32	32	40	48	49	54	59	60	62	62	72
G		53	54	61	79	83	94	109	130	158	184	219



快速接头E


SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	65	65	80	100	150
A		32	32	36.6	45	53.4	75.7	75.7	91.5	119.5	176
B		34.5	34.5	39	48	56	80	80	96	122	188
C		15	21.4	27.4	34	40.5	66.5	66.5	79	104.8	157
D		8	14	20	25	31	55	55	68	92	140
E		45	54	60	61	64	85	85	101.6	110	141
L		85	94	106	115	120	150	150	165.1	180	220

Deseen International STAINLESS HARDWARE




水管接头 HOSE NIPPLE (HON)

SIZE ITEM	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
O	7.00	9.00	11.00	15.00	20.00	26.00	34.00	40.50	52.50	63.50	76.10	100.00
V	35.00	47.00	51.00	60.50	69.80	81.50	86.50	91.00	108.00	108.00	128.00	138.00

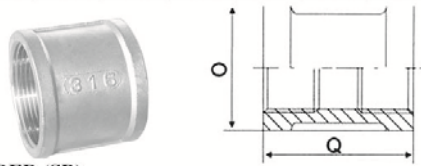


有边接头 SOCKET BANDED (SB)

SIZE ITEM	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
O	14.50	17.50	20.50	27.50	32.50	41.00	49.50	56.00	68.00	83.00	97.00	122.50
Q	24.50	25.00	30.00	35.00	39.00	44.00	49.50	53.50	63.00	71.00	76.50	86.00

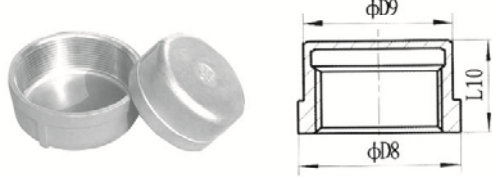

圆管帽 CAP (CB)


公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12	
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17	
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/4"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	86	86	69	86	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58

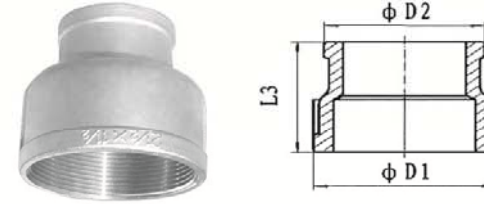

异径有边接头 REDUCING SOCKET BANDED (RSB)


公称直径	L1	C1	L2	C2	公称直径	L3	D1	D2	公称直径	L4	L5	D3	D4	L6	L7	D5	D6
1/4*1/8	23.5	17	15.5	17	1/2*1/8	34	26.5	15	1/4*1/8	18	18	18.4	15	18.0	18.0	18.4	15
3/8*1/8	24.5	21	16.5	21	1/2*1/4	34	26.5	18.5	3/8*1/4	20	22	22	18.4	20	22	22	18.4
3/8*1/4	28	21	16.5	21	1/2*3/8	34	26.5	22	1/2*1/4	24	24	26.5	18.4	24	24	26.5	18.4
1/2*1/4	28	26	20	26	3/4*3/8	36	32	22	1/2*3/8	26	25	26.5	22	26	25	26.5	22
1/2*3/8	31.5	26	20	26	3/4*1/2	36	32	26.5	3/4*3/8	28	28	32	22	28	28	32	22
3/4*3/8	33.5	31	22	31	1*3/8	42	41	22	3/4*1/2	29	30	32	26.5	29	30	32	26.5
3/4*1/2	37	31	22	31	1*1/2	42	41	26.5	1*1/2	32	33	41.5	26.5	32	33	41.5	26.5
1*1/2	40.5	36	25.5	38	1*3/4	42	41	32	1*3/4	34	35	41.5	32	34	35	41.5	32
1*3/4	42	36	25.5	38	1 1/4*1/2	48	49.5	26.5	1 1/4*3/4	38	40	49.5	32	38	40	49.5	32
1 1/4*3/4	44.5	46	28	46	1 1/4*3/4	48	49.5	32	1 1/4*1	40	42	49.5	41.5	40	42	49.5	41.5
1 1/4*1	47.5	46	28	46	1 1/4*1	48	49.5	41	1 1/2*1	41	45	56	41.5	41	45	56	41.5
1 1/2*1	47.5	53	28	53	1 1/2*3/4	52	56	32	1 1/2*1 1/4	45	48	56	49.5	45	48	56	49.5
1 1/2*1 1/4	49.5	53	28.5	53	1 1/2*1	52	56	41	2*1 1/4	48	54	70	49.5	48	54	70	49.5
2*1 1/4	56.5	63	33	63	1 1/2*1 1/4	52	56	49.5	2*1 1/2	52	55	70	56	52	55	70	56
2*1 1/2	56.5	63	33	63	2*1	58	70	41	2 1/2*1 1/4	---	---	---	---	---	---	---	---
2 1/2*1 1/2	56.5	80	36	80	2*1 1/4	58	70	49.5	2 1/2*1 1/2	---	---	---	---	---	---	---	---
2 1/2*2	64	80	36	80	2*1 1/2	58	70	56	2 1/2*2	---	---	---	---	---	---	---	---
3*2	68	93	40	93	2 1/2*1 1/2	65	86	56	3*2	---	---	---	---	---	---	---	---
3*2 1/2	71	93	40	93	2 1/2*2	65	86	70	3*2 1/2	---	---	---	---	---	---	---	---
4*2 1/3	77.5	119	46.5	119	3*2	72	99.5	70	4*2 1/2	---	---	---	---	---	---	---	---
4*3	81	119	46.5	119	3*2 1/2	72	99.5	86	4*3	---	---	---	---	---	---	---	---

Deseen International STAINLESS HARDWARE




变径六角外螺纹接头 REDUCING HEXAGON NIPPLE(RHN)

公称直径	L1	C1	L2	C2	公称直径	L3	D1	D2	公称直径	L4	L5	D3	D4	L6	L7	D5	D6
1/4*1/8	23.5	17	15.5	17	1/2*1/8	34	26.5	15	1/4*1/8	18	18	18.4	15	18.0	18.0	18.4	15
3/8*1/8	24.5	21	16.5	21	1/2*1/4	34	26.5	18.5	3/8*1/4	20	22	22	18.4	20	22	22	18.4
3/8*1/4	28	21	16.5	21	1/2*3/8	34	26.5	22	1/2*1/4	24	24	26.5	18.4	24	24	26.5	18.4
1/2*1/4	28	26	20	26	3/4*3/8	36	32	22	1/2*3/8	26	25	26.5	22	26	25	26.5	22
1/2*3/8	31.5	26	20	26	3/4*1/2	36	32	26.5	3/4*3/8	28	28	32	22	28	28	32	22
3/4*3/8	33.5	31	22	31	1*3/8	42	41	22	3/4*1/2	29	30	32	26.5	29	30	32	26.5
3/4*1/2	37	31	22	31	1*1/2	42	41	26.5	1*1/2	32	33	41.5	26.5	32	33	41.5	26.5
1*1/2	40.5	36	25.5	38	1*3/4	42	41	32	1*3/4	34	35	41.5	32	34	35	41.5	32
1*3/4	42	36	25.5	38	1 1/4*1/2	48	49.5	26.5	1 1/4*3/4	38	40	49.5	32	38	40	49.5	32
1 1/4*3/4	44.5	46	28	46	1 1/4*3/4	48	49.5	32	1 1/4*1	40	42	49.5	41.5	40	42	49.5	41.5
1 1/4*1	47.5	46	28	46	1 1/4*1	48	49.5	41	1 1/2*1	41	45	56	41.5	41	45	56	41.5
1 1/2*1	47.5	53	28	53	1 1/2*3/4	52	56	32	1 1/2*1 1/4	45	48	56	49.5	45	48	56	49.5
1 1/2*1 1/4	49.5	53	28.5	53	1 1/2*1	52	56	41	2*1 1/4	48	54	70	49.5	48	54	70	49.5
2*1 1/4	56.5	63	33	63	1 1/2*1 1/4	52	56	49.5	2*1 1/2	52	55	70	56	52	55	70	56
2*1 1/2	56.5	63	33	63	2*1	58	70	41	2 1/2*1 1/4	---	---	---	---	---	---	---	---
2 1/2*1 1/2	56.5	80	36	80	2*1 1/4	58	70	49.5	2 1/2*1 1/2	---	---	---	---	---	---	---	---
2 1/2*2	64	80	36	80	2*1 1/2	58	70	56	2 1/2*2	---	---	---	---	---	---	---	---
3*2	68	93	40	93	2 1/2*1 1/2	65	86	56	3*2	---	---	---	---	---	---	---	---
3*2 1/2	71	93	40	93	2 1/2*2	65	86	70	3*2 1/2	---	---	---	---	---	---	---	---
4*2 1/3	77.5	119	46.5	119	3*2	72	99.5	70	4*2 1/2	---	---	---	---	---	---	---	---
4*3	81	119	46.5	119	3*2 1/2	72	99.5	86	4*3	---	---	---	---	---	---	---	---



四通 CROSS(+B)


公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	18	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/1"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58




四角塞头 SQUARE PLUG(SQ)

公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/1"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58


100




公称口径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4	
8 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10	15	15	13	12.5	13	12	14	11	
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9	
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12	
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14	
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17	
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19	
32 11/11"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23	
40 11/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26	
50 2"	57	70	42	70	57	70	61	63	57	70	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 21/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	32	85	82	38.5	82	36	80	38.5	41	
80 3"	78	98.5	54	99.5	78	94	99.5	74.5	93	78	98.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46	
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	48	



公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	26.5	38	25.5	19
32 1 1/1"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	66.5	24.5	66.5	30	68.5	65.5	33.5	66.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46




公称直径	D1	L1	D2	L3	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	L9	D11	L11	D12	L12	C3	L13	C4	
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	18	13	12.5	13	12	14	11	
8 1/4"	19	18.4	17	16.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	10.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/1"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	5




公称直径	D1	L1	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	L9	D10	L11	D11	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	18	13	12.5	13	12	14	11	
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	16.5	20	16.5	21	15	12	
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/1"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58

Deseen International STAINLESS HARDWARE

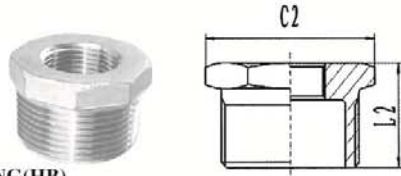


六角补申 HEXAGON BUSHING(HB)

公称直径	L1	C1	L2	C2	公称直径	L3	D1	D2	公称直径	L4	L5	D3	D4	L6	L7	D5	D6
1/4*1/8	23.5	17	15.5	17	1/2*1/8	34	26.5	15	1/4*1/8	18	18	18.4	15	18.0	18.0	18.4	15
3/8*1/8	24.5	21	16.5	21	1/2*1/4	34	26.5	18.5	3/8*1/4	20	22	22	18.4	20	22	22	18.4
3/8*1/4	28	21	16.5	21	1/2*3/8	34	26.5	22	1/2*1/4	24	24	26.5	18.4	24	24	26.5	18.4
1/2*1/4	28	26	20	26	3/4*3/8	36	32	22	1/2*3/8	26	25	26.5	22	26	25	26.5	22
1/2*3/8	31.5	26	20	26	3/4*1/2	36	32	26.5	3/4*3/8	28	28	32	22	28	28	32	22
3/4*3/8	33.5	31	22	31	1*3/8	42	41	22	3/4*1/2	29	30	32	26.5	29	30	32	26.5
3/4*1/2	37	31	22	31	1*1/2	42	41	26.5	1*1/2	32	33	41.5	26.5	32	33	41.5	26.5
1*1/2	40.5	36	25.5	38	1*3/4	42	41	32	1*3/4	34	35	41.5	32	34	35	41.5	32
1*3/4	42	36	25.5	38	1 1/4*1/2	48	49.5	26.5	1 1/4*3/4	38	40	49.5	32	38	40	49.5	32
1 1/4*3/4	44.5	46	28	46	1 1/4*3/4	48	49.5	32	1 1/4*1	40	42	49.5	41.5	40	42	49.5	41.5
1 1/4*1	47.5	46	28	46	1 1/4*1	48	49.5	41	1 1/2*1	41	45	56	41.5	41	45	56	41.5
1 1/2*1	47.5	53	28	53	1 1/2*3/4	52	56	32	1 1/2*1 1/4	45	48	56	49.5	45	48	56	49.5
1 1/2*1 1/4	49.5	53	28.5	53	1 1/2*1	52	56	41	2*1 1/4	48	54	70	49.5	48	54	70	49.5
2*1 1/4	56.5	63	33	63	1 1/2*1 1/4	52	56	49.5	2*1 1/2	52	55	70	56	52	55	70	56
2*1 1/2	56.5	63	33	63	2*1	58	70	41	2 1/2*1 1/4	--	--	--	--	--	--	--	--
2 1/2*1 1/2	56.5	80	36	80	2*1 1/4	58	70	49.5	2 1/2*1 1/2	--	--	--	--	--	--	--	--
2 1/2*2	64	80	36	80	2*1 1/2	58	70	56	2 1/2*2	--	--	--	--	--	--	--	--
3*2	68	93	40	93	2 1/2*1 1/2	65	86	56	3*2	--	--	--	--	--	--	--	--
3*2 1/2	71	93	40	93	2 1/2*2	65	86	70	3*2 1/2	--	--	--	--	--	--	--	--
4*2 1/3	77.5	119	46.5	119	3*2	72	99.5	70	4*2 1/2	--	--	--	--	--	--	--	--
4*3	81	119	46.5	119	3*2 1/2	72	99.5	86	4*3	--	--	--	--	--	--	--	--

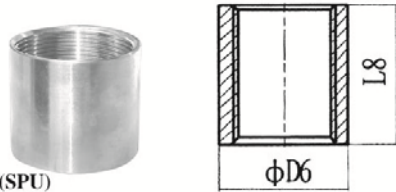


光面接头 SOCKET PLATN(SPU)

公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4
6 1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8 1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10 3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15 1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14		
20 3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25 1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32 1 1/4"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40 1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50 2"	57	70	42	70	57	70	61	63	67	70	67	70	62.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32	
65 2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80 3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	96	32	96	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100 4"	98	119.5	64	119.5	97	116	119.5	87	119	98	119.5	98	119.5	79	121	38	121	45	124	121	48	121	46	119	51.5	58

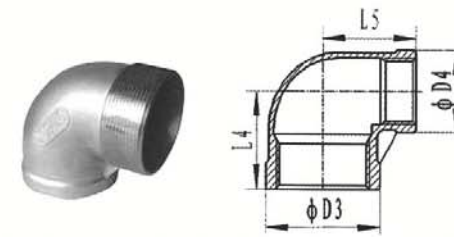


Deseen International

STAINLESS HARDWARE

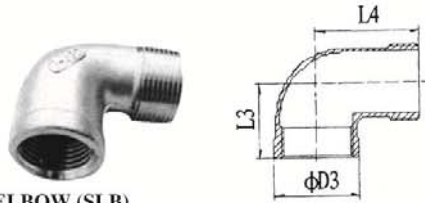


90° 内外牙弯头 STREET ELBOW (SLB)

公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4	
6	1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8	1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10	3/8"	23	22	19	22	23	29	22	28	21	23	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12	
15	1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20	3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17	
25	1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32	1 1/4"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40	1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50	2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65	2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80	3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100	4"	96	125.6	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58

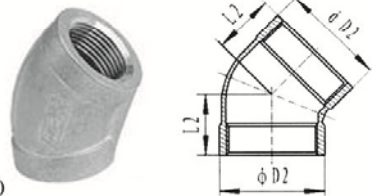


45° 弯头 45° ELBOW (45LB)

公称直径	L1	D1	L2	D2	L3	L4	D3	L5	C1	L6	D4	L7	D5	L8	D6	L9	D7	L10	D8	D9	L11	C2	L12	C3	L13	C4	
6	1/8"	17	15	16	15	17	26	15	20	14	17	15	17	15	16	14	6.5	14	10.5	15	13	12.5	13	12	14	11	7
8	1/4"	19	18.4	17	18.1	19	27	18.4	27	17	19	18.4	19	18.4	23	17.5	10	17.5	14	18.5	16.5	16.5	16	15.5	17	13	9
10	3/8"	23	22	19	22	23	29	22	28	21	23	22	22	22	24	21	10.5	21	14.5	22	20	16.5	20	16.5	21	15	12
15	1/2"	27	26.5	21	26.5	27	35	26.5	35	26	27	26.5	27	26.5	31	24.5	14	24.5	18.5	27.5	24.5	21	24.5	20	26	18.5	14
20	3/4"	32	32	25	32	32	40	32	38.5	31	32	32	32	32	34	31	15.5	31	19.5	33	30	22.5	30	22	31	21	17
25	1"	38	41.5	29	41.5	38	46	41.5	45	36	38	41.5	38	41.5	40	38	18.5	38	22.5	40.5	37.5	26	37.5	25.5	38	25.5	19
32	1 1/4"	45	49.5	33	49.5	45	54	49.5	49.5	46	45	49.5	45	49.5	43.5	47	20	47	25.5	49.5	46.5	29	46.5	28	46	28	23
40	1 1/2"	48	56	37	56.0	48	57	56	49.5	53	48	56	48	56	43.5	53.5	20	53.5	25.5	56	53	29	53	28	53	29	26
50	2"	57	70	42	70	57	70	70	61	63	57	70	57	70	52.5	65.5	24.5	65.5	30	68.5	65.5	33.5	65.5	33	63	34.5	32
65	2 1/2"	69	86	49	86	69	83	86	67	80	69	86	69	86	61	82	29	82	35	85	82	38.5	82	36	80	38.5	41
80	3"	78	99.5	54	99.5	78	94	99.5	74.5	93	78	99.5	78	99.5	67	95	32	95	38.5	98.5	95.5	42	95.5	40	93	41.5	46
100	4"	96	125.5	64	125.5	97	115	125.5	87	119	96	125.5	96	125.5	79	121	38	121	45	124.5	121.5	48.5	121.5	46.5	119	51.5	58

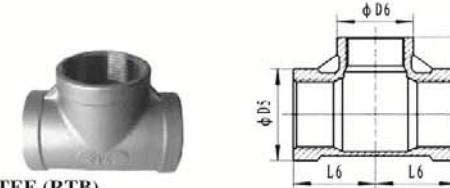

变径三通 REDUCING TEE (RTB)

公称直径	L1	C1	L2	C2	公称直径	L3	D1	D2	公称直径	L4	L5	D3	D4	L6	L7	D5	D6
1/4*1/8	23.5	17	15.5	17	1/2*1/8	34	26.5	15	1/4*1/8	18	18	18.4	15	18.0	18.0	18.4	15
3/8*1/8	24.5	21	16.5	21	1/2*1/4	34	26.5	18.5	3/8*1/4	20	22	22	18.4	20	22	22	18.4
3/8*1/4	28	21	16.5	21	1/2*3/8	34	26.5	22	1/2*1/4	24	24	26.5	18.4	24	24	26.5	18.4
1/2*1/4	28	26	20	26	3/4*3/8	36	32	22	1/2*3/8	26	25	26.5	22	26	25	26.5	22
1/2*3/8	31.5	26	20	26	3/4*1/2	36	32	26.5	3/4*3/8	28	28	32	22	28	28	32	22
3/4*3/8	33.5	31	22	31	1*3/8	42	41	22	3/4*1/2	29	30	32	26.5	29	30	32	26.5
3/4*1/2	37	31	22	31	1*1/2	42	41	26.5	1*1/2	32	33	41.5	26.5	32	33	41.5	26.5
1*1/2	40.5	36	25.5	38	1*3/4	42	41	32	1*3/4	34	35	41.5	32	34	35	41.5	32
1*3/4	42	36	25.5	38	1 1/4*1/2	48	49.5	26.5	1 1/4*3/4	38	40	49.5	32	38	40	49.5	32
1 1/4*3/4	44.5	46	28	46	1 1/4*3/4	48	49.5	32	1 1/4*1	40	42	49.5	41.5	40	42	49.5	41.5
1 1/4*1	47.5	46	28	46	1 1/4*1	48	49.5	41	1 1/2*1	41	45	56	41.5	41	45	56	41.5
1 1/2*1	47.5	53	28	53	1 1/2*3/4	52	56	32	1 1/2*1/4	45	48	56	49.5	45	48	56	49.5
1 1/2*1 1/4	49.5	53	28.5	53	1 1/2*1	52	56	41	2*1 1/4	48	54	70	49.5	48	54	70	49.5
2*1 1/4	56.5	63	33	63	1 1/2*1 1/4	52	56	49.5	2*1 1/2	52	55	70	56	52	55	70	56
2*1 1/2	56.5	63	33	63	2*1	58	70	41	2 1/2*1 1/4	---	---	---	---	---	---	---	---
2 1/2*1 1/2	56.5	80	36	80	2*1 1/4	58	70	49.5	2 1/2*1 1/2	---	---	---	---	---	---	---	---
2 1/2*2	64	80	36	80	2*1 1/2	58	70	56	2 1/2*2	---	---	---	---	---	---	---	---
3*2	68	93	40	93	2 1/2*1 1/2	65	86	56	3*2	---	---	---	---	---	---	---	---
3*2 1/2	71	93	40	93	2 1/2*2	65	86	70	3*2 1/2	---	---	---	---	---	---	---	---
4*2 1/3	77.5	119	46.5	119	3*2	72	99.5	70	4*2 1/2	---	---	---	---	---	---	---	---
4*3	81	119	46.5	119	3*2 1/2	72	99.5	86	4*3	---	---	---	---	---	---	---	---

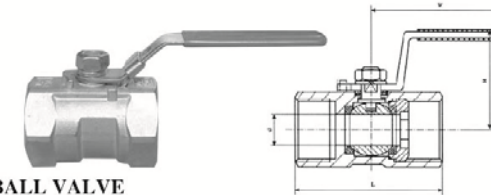


一片式球阀 1-PC BALL VALVE

SIZE	d	L	H	W	CV FACTORY	TORQUE INCHLBS
1/4"	5	39	34	69	4.0	12
3/8"	7	44	36	90	4.0	12
1/2"	9.2	56.5	41	98	4.5	12
3/4"	12.5	59	44	98	9	18
1"	15	71	51	11	16	36
1-1/4"	20	78	56	110	24	54
1-1/2"	25	83	65	140	37	72
2"	32	100	70	140	68	84

Deseen International STAINLESS HARDWARE


Stainless Steel and Carbon Steel Square Anchor 四方锚

SIZE	A mm	B mm	C mm	D mm	E mm
400	275	60	16	9	
400	320	75	16	9	

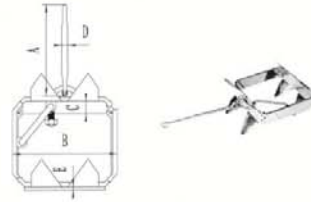


Stainless Steel And Carbon Steel Delta Anchor 不锈钢和碳钢三角锚

SIZE	A mm	B mm	C mm	D mm	E mm
5KG					
7KG	520	400	275	270	
8KG					
10KG	570	450	290	280	
15KG					
16KG	640	500	350	340	
20KG					
25KG	480	520	400	360	12
40KG	520	650	520	450	16




Carbon Steel And Stainless Steel Plough Anchor 碳钢与不锈钢犁式锚

SIZE	A mm	B mm	C mm	D mm	E mm
5KG	510	340	260	220	8-32
7KG	560	380	270	230	8-32
9KG	600	375	280	250	11-46
10KG	620	400	290	270	11-46
12KG	660	430	340	300	11-46
15KG	730	490	370	330	13-50
22KG	700	550	360	390	15-38
27KG	780	600	460	360	15-40
30KG	800	630	480	350	15-54




Carbon Steel And Stainless Steel Delfts Anchor 碳钢和不锈钢丹佛斯锚

SIZE	A mm	B mm	C mm	D mm	E mm
1.5KG	300		225	420	
2.0KG	350		230	470	
3.6KG	380	85	280	530	8
5.5KG	485	85	340	590	8
7.0KG	510	90	300	650	8
9KG	530	90	400	650	10
10KG	580	100	350	770	10
12KG	600	100	450	850	12
15KG	650	110	425	900	12
17KG		120			12
20KG		120			12
30KG		150			12
42KG		160			12
75KG		200			20
91KG		260			20



Carbon Steel And Stainless Steel Bruce Anchor 碳钢和不锈钢布斯锚

SIZE	A mm	B mm	C mm	D mm	E mm
1KG	265	110	183	130	8
2KG	350	150	230	175	10
2.5KG	400	160	220	200	15-18
3.5KG	435	170	235	240	15-18
5KG	470	190	310	270	15-18
7.5KG	530	210	360	290	15-18
10KG	600	228	380	320	15-18
15KG	670	265	450	360	18-18
20KG	715	360	470	390	15-20
25KG	735	365	515	410	18-25
30KG	815	425	550	460	18-25
50KG	1000	440	675	500	18-30






Deseen International

STAINLESS HARDWARE

Stainless Steel Folding Anchor

不锈钢折叠锚

SIZE	A mm	B mm	C mm	D mm
0.7KG	200	86	52	90
1.5KG	305	135	53	140
2.5KG	350	160		155
3.2KG	390	220	67	170
4KG	432	240	76	190
5KG	460	300	85	200
7KG	530	300	85	



Grund Anchor

地锚钩

SIZE	A mm	B mm	C mm
1700	440	9	206

PVC Dipping Mushroom Anchor

浸塑蘑菇锚

SIZE	A mm	B mm	C mm	D mm	E mm
030	147	125	Φ65	106	10
050	177	147	Φ78	122	10

PVC Dipping Delfth Anchor


浸塑丹佛斯锚

Weight	Material	Color
1.5kg	Steel Plate	Red
2.5kg	Steel Plate	Blue
3.5kg	Steel Plate	Orange

Hot Dipped Galvanized Folding Anchor

热镀锌折叠锚




SIZE	A mm	B mm	C mm
0.7KG	200	120	52
1.5KG	320	170	53
2.5KG			
3.2KG	420	220	67
4KG	460	240	76
6KG	540	300	85
7KG	530	300	85
8KG	650	612	135
10KG			



Anchor Filled With Pb

灌铅锚

SIZE	A mm	B mm	C mm	D mm	E mm
20KG	505	380	400	390	65
25KG	505	380	400	390	65



New Type Anchor


山形锚

A mm	B mm	C mm
834.6	661.7	153.3

Anchor

长剑锚

A mm	B mm	C mm
1000	38	40
800	38	31



Chain Stoop

止链器

A mm	B mm	C mm	D mm	E mm
80.2	70	62	Φ12.5	13
59.5	53.5	48	Φ8	10.8

Deseen International

STAINLESS HARDWARE

Hollow Base Cleat

圆索栓

SIZE	A mm	B mm	C mm	D mm	E mm
4"	101.6	36.4	25.4	48.3	22.3
5"	127	39	27.4	53.8	25.3
6"	152.4	44	31	56.5	26.1
* 6"	152.4	46.2	31	56.9	26.1
8"	203.2	53.6	41.3	75.5	28.5
* 8"	203.2	52	38	75.8	36.5
10"	254	65	50	95.1	44
12"	304.8	70.3	52.5	98.7	48.7

*heavy



Anchor Chain

锚连接

A mm	B mm	C mm	D mm	E mm
88	9.9	16.4	5-16"-18	M10
117	14.2	19.5	M12	M12

Heavy Duty Cleat

重圆索栓

A mm	B mm	C mm	D mm	E mm
254.3	71	60	98	47



Swivel Anchor Chain

锚连接

A mm	B mm	C mm	D mm	E mm
95.4	8.9	14.7	5-16"-18	M10
118.2	14	21	M12	M12

Top Cap

球滑帽

SIZE	A mm	B mm	C mm	D mm
4-5/16"	110.9	7.05	25.4	Φ5.5
6-5/16"	160	22.2	34.9	Φ6.5
8-1/4"	209	25	48	Φ8.5



Low Silhouette Cleat

扁索栓

SIZE	A mm	B mm	C mm	D mm	E mm
5"	124.3	46	25.2	41.2	29.5
6"	148	56	28.7	40.2	39.5
6"	198.4	62	31.2	49.3	43.8
10"	254	63.7	40	57.6	44.8



Double Swivel Anchor Chain

锚连接

A mm	B mm	C mm	D mm	E mm
120	9	16	5-16"-18	M10
169	13.6	17.7	M12	M12

Cleat

扁索栓

A mm	B mm	C mm	D mm
224	50	75	Φ10.2



Anchor Chain

锚连接

A mm	B mm	C mm	D mm	E mm
139	17.5	27.5	M14	M16

Deseen International STAINLESS HARDWARE


Flush Cleat 推拉式索栓

SIZE	A mm	B mm	C mm	D mm	E mm
5"	130	21.7	65		M6*41
6"	160	35	70		M10*48
8"	210	45	96		M10*66
10"	260	57	121		M12*80
12"	310	69	125		M12*80




Flash Cleat 推拉式索栓

SIZE	A mm	B mm	C mm	D mm	E mm
5"	127	42	20	18.6	M22




Cleat K型索栓

SIZE	A mm	B mm	C mm	D mm	E mm
220	31	51	95		M8*15




Round Tube Cleat 圓管式索栓

SIZE	A mm	B mm	C mm	D mm	E mm
11-1/2"	292.1	38.1	88.9	25	M12




Oval Tube Cleat 橢圓管式索栓

SIZE	A mm	B mm	C mm	D mm	E mm
6"	150	19	55	120	69.5
8"	203.2	34	58.3	140	67.5
10"	250	40	70	150	84
12"	304.8	50	80	178	83



Oval Tube Cleat 橢圓式索栓

A mm	B mm	C mm	D mm	E mm
207	52.3	66	20	M8

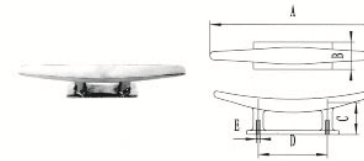

Cleat 底板式索栓

SIZE	A mm	B mm	C mm	D mm	E mm
6"	149	21.4	29.5	44.5	Φ4.5
8"	198.6	25.4	35.1	55	Φ7



Cleat With Threaded Stud 扁索栓

SIZE	A mm	B mm	C mm	D mm	E mm
8"	203.2	60	M12	84	8
10"	254	60	M12	98	10
12"	304.8	60	M12	116	13
15"	381	60	M12	140	15



Cleat With Threaded Stud 扁索栓

SIZE	A mm	B mm	C mm	D mm	E mm
8"	203.2	M12	30	84	12
10"	254	M12	30	98	15
12"	304.8	M12	30	116	18
15"	381	M12	30	140	20





Humpbacked Cleats 駝型索栓

SIZE	A mm	B mm	C mm	D mm	E mm
6"	152.4	15	26	45	M6*10
8"	203.2	20	35	59	M8*16
10"	254			80	M10*25

Deseen International STAINLESS HARDWARE

Bow Chocks 斜平导缆器

SIZE	A mm	B mm	C mm	D mm	E mm
4-3/4"	121	19	23.5	Φ5.5*2	14
6"	152.4	23.8	26	Φ5.5*2	32





Chocks 滑轮式导缆器

A mm	B mm	C mm	D mm	E mm
200	41	57	35	43
250	45	80	49	44

skene Bow Chocks 斜凹导缆器

SIZE	A mm	B mm	C mm	D mm	E mm
6"	152.4	34	124.6	20	Φ5.5
8"	203.2	38	164.4	29	Φ5.5
10"	254	47.6	207	35	Φ8.2





Hawse Pipe 导缆孔

A mm	B mm
180	80

skene Bow Chocks 斜尖导缆器

SIZE	A mm	B mm	C mm	D mm	E mm
4-1/2"	114.3	19	30	Φ5.3*2	85
6"	147.6	27	38	Φ6.8*2	102




Cross Bollard Single 单十字缆桩

A mm	B mm	C mm	D mm	E mm
200	120	Φ75	Φ12	169
165	165	Φ76	Φ12	178

Straight Chocks 直导缆器

SIZE	A mm	B mm	C mm	D mm	E mm
4-1/2"	102	20.00	27	23	Φ5.5
6"	152.4	22.2	32	28	Φ5.5
8"	203.2	12.7	38	41	Φ5.5
10"	254	44.45	40	42.5	Φ8.5





Cross Bollard Single 单十字缆桩

A mm	B mm	C mm	D mm	E mm
135	135	Φ50	Φ12	Φ21
120	120	Φ51	Φ12	Φ21
120	120	Φ51	Φ12	Φ21

Chocks 滑轮式导缆器

A mm	B mm	C mm	D mm	E mm
230	45	67	35	36





Cross Bollard Single 单十字缆桩

A mm	B mm	C mm	D mm	E mm
63	63	83	31	83

Deseen International



STAINLESS HARDWARE

Cleat					重扁螺栓
SIZE	A mm	B mm	C mm	D mm	E mm
12"	304	35	92	115	M16*80





Oval Hawse Pipe		导缆孔			
A mm	B mm	C mm	D mm		
139.7	37.5	27	Φ5.5		
239	84.5	31	Φ9.1		

Cleat		异形螺栓		
A mm	B mm	C mm		
200	23	48		





Hawse Pipe		导缆孔			
A mm	B mm	C mm	D mm		
190	200	130	355		

Cleat		S形螺栓		
SIZE	A mm	B mm	C mm	
10"	260	67	114	
12"	313	85	132	






Hawse Pipe		导缆孔			
A mm	B mm	C mm			
190	145	130			

Oval Hawse Pipe With Cleats		把式导缆孔		
A mm	B mm	C mm		
736.59	201.6	215.9		






Hawse Pipe				导缆孔	
A mm	B mm	C mm	D mm	E mm	
360*260	257	157	65.5	6.5	

Oval Hawse Pipe With Cleats		导缆孔		
A mm	B mm	C mm		
338.7	185	139.7		



Horn Bollard				铁板凳	
SIZE	A mm	B mm	C mm	D mm	E mm
6"	152	60	62	45	M10
8"	203	70	77	57	M10
10"	255	80	91	103	M16
12"	310	90	109	130	M18

Oval Hawse Pipe		导缆孔			
A mm	B mm	C mm	D mm		
190	67.32	42.4	Φ8		



Straight chocks		导缆器			
A mm	B mm	C mm	D mm		
170	32	43	Φ10.2		




Deseen International

STAINLESS HARDWARE

Cross Bollard Double

双十字缆桩

A mm	B mm	C mm	D mm	E mm
146	63	86	31	182



Cross Bollard



系缆桩

A mm	B mm	C mm	D mm	E mm
86	97	61	14.5±0.3	5.9

Cross Bollard Single

单十字缆桩

A mm	B mm	C mm	D mm	E mm
122	97	122	60.5	151
150	120	152	76	200
350	350	270	120	280



Cross Bollard




系缆桩

A mm	B mm	C mm	D mm
61	86	127.3	Φ7.5

Cross Bollard with Base

单十字缆桩

A mm	B mm	C mm	D mm	E mm	F mm
38×1.5	98	90	10	57×57×2.5	48
50×2.0	120	100	12	72×72×2.5	55
60×2.0	160	115	12	90×90×3.0	62
76×2.5	210	150	14	110×110×3.0	85
89×2.5	250	160	14	134×134×3.5	87
102×2.5	280	180	16	148×148×3.5	98



Mast Bracket



旗杆座

A mm	B mm	C mm	D mm	E mm
72.4	82.5	Φ25.4	Φ6.5	M5

Cross Bollard

单十字缆桩

A mm	B mm	C mm	D mm	F mm
38×1.5	98	90	10	48
50×2.0	120	100	12	55
60×2.0	160	115	12	62
76×2.5	210	150	14	85
89×2.5	250	160	14	87
102×2.5	280	180	16	98



Mast Bracket

旗杆座


A mm	B mm	C mm	D mm	E mm
95	75	81	29	Φ7

Mast Bracket

旗杆座

A mm	B mm	C mm	D mm	E mm
99.5	40.5	41.5	38.5	6


Deseen International STAINLESS HARDWARE

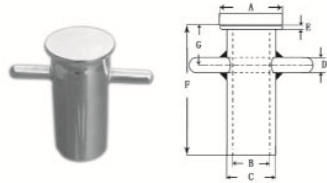


CROSS BOLLARD(系缆桩)

SIZE	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SB291-04	75	57	65	16	4	144	40

CROSS BOLLARD(系缆桩)




SIZE	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
SB292-04	75	57	65	16	4	144	40	30	14

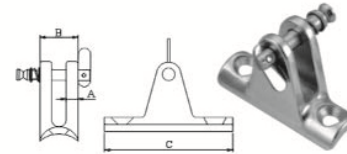


DECK HINGE (CONCAVE BASE WITH REMOVABLE PIN),SS304 OR SS316.

A mm	B mm	C mm
4.40	16.90	56.00



MAST WATER CLEAT,SS304 OR SS316. CYSS09


SIZE	A mm	B mm	C mm	D mm	E mm
4"	23.50	9.00	100.00	4.50	30.00
5"	30.00	10.50	125.00	5.50	40.00
6"	32.00	12.00	150.00	6.50	45.00
8"	42.00	13.00	203.00	8.50	63.00
10"	52.00	16.00	250.00	8.50	71.00
12"	62.00	14.00	300.00	8.50	90.00



CYDK


ECCENTRIC LATCH CASTING,SS304 OR SS316.

SIZE	A mm	B mm	C mm	L mm
75 x 37	37.00	38.00	30.00	75.00

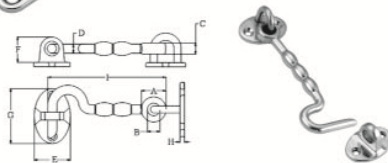

DOOR HOOK,SS304 OR SS316.

SIZE	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
76 x 38	18.00	8.00	8.00	7.00	26.00	19.00	38.00	3.00	76.00
76 x 38	18.00	8.00	8.00	7.00	26.00	19.00	38.00	3.00	100.00



SKENE CHOCKS,SS304 OR SS316. CYLQ04

SIZE	Φ mm	A mm	B mm	C mm	D mm
5	5.00	116.00	97.50	25.60	23.00
6	6.00	153.50	123.50	29.50	34.00
7	7.00	153.60	124.50	29.50	34.00


Deseen International

STAINLESS HARDWARE

Mast Bracket

旗杆座


A mm	B mm	C mm	D mm	E mm
51	40	6	42.5	5.5



Antenna Base

天线座


A mm	B mm	C mm	D mm	E mm
92.5	64	112.5	Φ8	1-14-UNS



Bow Roller

锚支架

A mm	B mm	C mm	D mm
620	83	300	200
670	85	340	170



Bow Roller

锚支架



A mm	B mm	C mm	D mm
795	75	175	5.5



Bow Roller

锚支架


A mm	B mm	C mm	D mm	E mm
170	64	66	54	6



Bow Roller

锚支架


A mm	B mm	C mm	D mm	E mm	F mm
240	59	98.5	8	77	9.5



Bow Roller

锚支架


A mm	B mm	C mm	D mm	E mm
400	300	45	R16	Φ10



Bow Roller

锚支架


A mm	B mm	C mm	D mm	E mm
340	60	158	240	42



Bow Roller

锚支架

A mm	B mm	C mm	D mm	Load Weight
350	65	280	45 ± 0.1	5-10kg
				15-20kg
				20-30kg



Bow Roller

锚支架

A mm	B mm	C mm	D mm
300	53	98	45



Deseen International

STAINLESS HARDWARE

Connection

船前支架

SIZE	A mm	B mm	C mm	D mm
7/8"	22.22	39	47.6	Φ5.5*2
1"	25.4	41	57.15	Φ5.5*2



End Stanchion 90°



船尾支架

SIZE	A mm	B mm	C mm	D mm
1"	25.4	44	67	Φ5.0

Stanchion (Center) 60°

船中支架

SIZE	A mm	B mm	C mm	D mm
7/8"	22.22	41	47.6	Φ5.5*2
1"	25.4	41	57.15	Φ5.5*2



Stanchion (Center) 90°



船中支架

SIZE	A mm	B mm	C mm	D mm
1"	68	60	25.4	5.5

Stanchion (End) 60°

船尾支架

SIZE	A mm	B mm	C mm	D mm
7/8"	22.22	39	47.6	Φ5.5*2
1"	25.4	41	57.15	Φ5.5*2



Stanchion (End) 90°



船尾支架

SIZE	A mm	B mm	C mm	D mm
1"	21.5	54	67	5.4

Centre Stanchion 60°

船中支架

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	66	31	Φ22.4	Φ5.5	1/4"-28
1"					



Hand Rail Fitting



支架

A mm	B mm	C mm	D mm	E mm
54	35	31.5	21.8	60

Stanchion (End) 60°

船尾支架

SIZE	A mm	B mm	C mm	D mm
7/8"	22.22	35	65	Φ5.5*2
1"	25.4	34	55.88	Φ5.5*2



Hand Rail Fitting

支架



A mm	B mm	C mm	D mm	E mm
58.2	68.4	28.2	22.4	6.6

Deseen International

STAINLESS HARDWARE




Stanchion	SIZE	A mm	B mm	C mm	D mm
	R1-1/2"	25	34	12	38.1
	R2"	25	34	12	50.8
	R1-1/2"	25	34	12	38.1
	R2"	25	34	12	50.8
	R1-1/2"	25	37	16	38.1
	R2"	25	37	16	50.8
	R1-1/2"	25	37	16	38.1
	R2"	25	37	16	50.8

*through hole (通孔) #blind hole (盲孔)





Stanchion	A mm	B mm	C mm
	34	20	39
	34	20	39
	39	26	44
	39	26	44
	38		
	38		

Stanchion	A mm	B mm	C mm
	25	30	12
	25	30	12
	25	34	16
	25	34	16




Insert	A mm	B mm	C mm	D mm
1-1/2"	35.4	28	38.5	2.7
2"	47.8	29	51.4	3.3

Stanchion	SIZE	A mm	B mm	C mm	D mm
	R1-1/2"	34	20	44	38.1
	R2"	34	20	44	50.8
	R1-1/2"	34	20	44	38.1
	R2"	34	20	44	50.8
	R1-1/2"	39	26	49	38.1
	R2"	39	26	49	50.8
	R1-1/2"	39	26	49	38.1
	R2"	39	26	49	50.8



Stanchion	A mm	B mm	C mm	D mm	E mm
	45	20	54	25.4 (1")	38.1 (R1-1/2")
				1-1/2"	1-1/2"
	45	20	54	25.4 (1")	50.8 (R2")
	64	26.5	71	38.1 (1-1/2")	50.8 (R2")
	81	28.5	94	50.8 (2")	50.8 (R2")



Tube Connection	A mm	B mm	C mm
1-1/2"	35.4	53	2.6
2"	47.8	53	3
2-1/2"	60.5	67.5	4



Deseen International

STAINLESS HARDWARE

Rectangular Base

管座

SIZE	A mm	B mm	C mm	D mm
1-1/2"	75.5	56.5	26	38.1
2"	100	69	30	50.8
2-1/2"	127	85	38	63.5

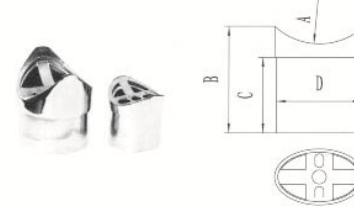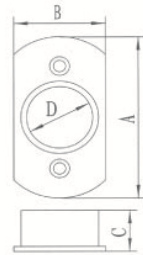

Stanchion



支架

A mm	B mm	C mm	D mm
38.1 (R1-1/2")	48	25	35.4 (1-1/2")
50.8 (R2")	40	25	35.4 (1-1/2")
50.8 (R2")	54	26	47.8 (2")
63.5 (R2-1/2")	48	26	47.8 (2")

Tube Connection

快速连接管座

SIZE	A mm	B mm	C mm
1"	66	37	25.4
1-1/4"	76	42	31.8
1-1/2"	83	45	38.1
2"	102	52	50.8



Stanchion



支架

SIZE	A mm	B mm
1"	25.4	60

Stanchion

支架

SIZE	A mm	B mm	C mm
1-1/2"	38.1 (1-1/2")	87	38.1
2"	38.1 (1-1/2")	83	50.8
2"	50.8 (2")	117	50.8

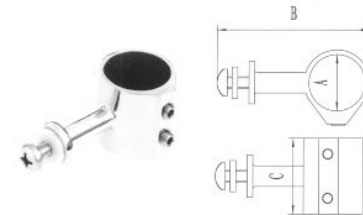

Special Top Slide



特殊滑套

SIZE	A mm	B mm	C mm	D mm
1"	25.4	73	31.5	34

Stanchion

支架

SIZE	A mm	B mm	C mm
1-1/2"	38.1	75	38.1
2"	38.1	70	50.8
2"	50.8	97.5	50.8

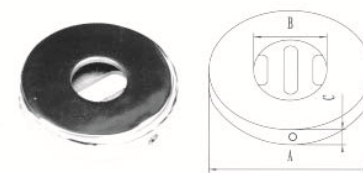

Round Base

管座

SIZE	A mm	B mm	C mm
1"	76	25.4	13
1-1/4"	76	31.8	13
1-1/2"	77	38.1	13
2"	77	50.8	13




Deseen International

STAINLESS HARDWARE

Insert

塞头

SIZE	A mm	B mm	C mm
1-1/2"	35.4	43	24
2"	47.8	57	25.4



Cross




四通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	62	62	90
1"	25.4	71	71	90

Tees90°

三通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	52	52	90
1"	25.4	55	55	90
1-1/4"	31.75	76	83	90



Corner Fitting 3 Way



三通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	40	40	90
1"	25.4	50	50	90

Tees90°

三通

A mm	B mm	C mm	D mm
30	62	59	90
40	82	77	90



Elbow & Anchor Eye




弯头

SIZE	A mm	B mm	C mm
7/8"	22.2	60	60

Tees60° (Universal)

三通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	48	57	60
1"	25.4	52	60	60
1-1/4"	31.75	79	79	60



Tees 60°




三通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	48	57	60
1"	25.4	53	60	60

Tees60°

三通

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	48	57	60
1"	25.4	53	60	60



Elbow 90°

弯头

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	50	50	90
1"	25.4	51	51	90
1-1/4"	30	58.5	58.5	90




Deseen International

STAINLESS HARDWARE

Round Base

管座

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	66.7	22.2	45	Φ5.5	Φ11.7
1"	69.7	25.4	42	Φ6.8	Φ11.7



Rectangular Base



方长臂管座

SIZE	A mm	B mm	C mm	D mm	E °
7/8"	77	43.5	48	22.2	60
1"	82	47	51	25.4	60
1-1/4"	86	53.7	52	31.8	60

Round Base

管座

SIZE	A mm	B mm	C mm	D mm	Degree
1"	69.85	25.4	24	Φ7	90°



Rectangular Base



方长臂管座

SIZE	A mm	B mm	C mm	D mm	E °
7/8"	77	43.5	46	22.2	90
1"	82	47	44	25.4	90
1-1/4"	82	53	44	31.8	90

Round Base

圆长臂管座

A mm	B mm	C mm	D mm	Degree
74	30	44	Φ7	90°
84	40	42.5	Φ7	90°
74	32	44	Φ7.5	90°



Rectangular Base



方长臂管座

SIZE	A mm	B mm	C mm	D mm	E °
7/8"	82	47	40	22.2	30
1"	82	47	50	25.4	30
7/8"	82	47	44.5	22.2	45
1"	82	47	44.5	25.4	45

Round Base

圆长臂管座

SIZE	A mm	B mm	C mm	D mm	E °
7/8"	66.7	22.2	37	Φ5.5	30
1"	73	25.4	36	Φ6.8	30
7/8"	66.7	22.2	47	Φ5.5	45
1"	73	25.4	38	Φ6.8	45
7/8"	66.7	22.2	39	Φ5.5	60
1"	69.9	25.4	46	Φ6.8	60



Rectangular Base

方长臂管座

A mm	B mm	C mm	D mm	E °
97.5	56	44.5	30	30

Weldable Rectangular Base

方可焊管座



SIZE	A mm	B mm	C mm	D mm	E °
7/8"	78	44	22.2	Φ7	45
1"	78	44	25.4	Φ7	45
7/8"	78	44	22.2	Φ7	60
1"	78	44	25.4	Φ7	60
7/8"	78	44	22.2	Φ7	90
1"	78	44	25.4	Φ7	90

Deseen International

STAINLESS HARDWARE

Weldable Round Base 圓可焊管座

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	66	22.2	Φ5.5	Φ10	45
1"	79	25.4	Φ7	Φ12	45
7/8"	79	22.2	Φ5.5	Φ10	60
1"	79	25.4	Φ7	Φ12	60
7/8"	66	22.2	Φ5.5	Φ10	90
1"	79	25.4	Φ7	Φ12	90






Pipe Base 栏杆座

SIZE	A mm	B mm	C mm	D mm	E mm
1"	26	28.5	56.4	44.4	90
1"	26	50	70	44.4	60
1-1/4"	31	50	70	47	60

Pipe Base 栏杆座

SIZE	A mm	B mm	C mm	D mm
	130	69	40	31.2





Pipe Base 栏杆底座

SIZE	A mm	B mm	C mm	D mm	E mm
1" 45°	76.5	Φ30	34.5	61	M8
1-1/4" 45°	76	Φ31	35	61	M8

Pipe Base 栏杆座

SIZE	A mm	B mm	C mm	D mm
1-1/4"	Φ54	Φ33	70	60
1-1/4"	Φ52	Φ33	80	90
1-1/4"	Φ58	Φ33	60	75
	Φ63.7	Φ38	77	60
	Φ59.2	Φ38	77	90
	Φ55	Φ32	80	90
	Φ53	Φ34	81	90





Pipe Base 栏杆座

SIZE	A mm	B mm	C mm	D mm	E mm
1"	90	56	Φ26	60	6

Pipe Base 栏杆座

SIZE	A mm	B mm	C mm	D mm
1-1/4"	Φ31.8	Φ33	Φ68	45




Base Round 圓管座

SIZE	A mm	B mm	C mm	D mm
1-1/2"	Φ76.5	38.1	26	Φ5.5
2"	Φ101	50.8	30	Φ6.5
2-1/2"	Φ128	63.5	38	Φ6.5
3"	Φ151.5	76.2	44	Φ6.5

Round Base 圓底板

SIZE	A mm	B mm	C mm	D mm
1"	75	25.4	3	Φ8
1-1/4"	75	31.8	3	Φ6.5
1-1/2"	75	38.1	3	Φ5




Deseen International

STAINLESS HARDWARE

Pope Support

导绳支架

SIZE	A mm	B mm	C mm	D mm	E mm
208	78	70	5	M20	



Stanchion



头支架

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/2"	76.5	50	99	38.1	13
1-1/2"	76.5	50	170	38.1	13
2"	76.5	65.5	100	50.8	13
2"	76.5	65.5	170	50.8	13
2"	76.5	65.5	237	50.8	13

Stanchion

支架

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/4"	76	32.48	51	13	Φ31.75
1-1/2"	76	38.4	53	13	Φ38.1



Stanchion



角支架

SIZE	A mm	B mm	C mm	D mm	E mm
2"	76	68	99	50.8	13
2"	76	68	180	50.8	13
2"	76	68	237	50.8	13

Stanchion Base

底座

SIZE	A mm	B mm	C mm	D mm	E mm
76	32.48	50.75	4	Φ31.75	
76	38.40	52.00	4	Φ38.1	



Stanchion Base



支架

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/4"	75	72	31.75	29	3
1-1/2"	75	79	38.1	35.4	3

Stanchion Base

连接底座

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/2"	77	31	76	5	6.5
2"	87	43.2	89	6	7



Insert



塞头

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/2"	95	95	38.1	34.5	25

Stanchion

中支架

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/2"	76.5	50	99	38.1	13
1-1/2"	76.5	50	170	38.1	13
2"	76.5	65.2	100	50.8	13
2"	76.5	65.2	170	50.8	13
2"	76.5	65.2	237	50.8	13



Insert

塞头

SIZE	A mm	B mm	C mm	D mm	E mm
1-1/2"	112	38.1	35.6	135	25
2"	118	50.8	48	135	25



Deseen International

STAINLESS HARDWARE

Boat Hook

停钩

A mm	B mm	C mm	D mm	E mm
170	50	34	Φ4	Φ12
188	50	41	Φ6	Φ14.5



Handle From Tube



把手

A mm	B mm	C mm	D mm	E mm
203.2	92	22	35	M8
254	92	22	35	M8
304.8	90	22	35	M8
355.6	90	22	35	M8

Handle

把手

A mm	B mm	C mm	D mm	E mm
127	55	14	17.5	25



Handle From Tube



把手

A mm	B mm	C mm	D mm	E mm
335	82	25.4	54.5	8.2

Handle

把手

A mm	B mm	C mm	D mm	E mm
119	25.5	Φ4	103.6	53



Handle Casted



把手

A mm	B mm	C mm	D mm	E mm
304.8	280	M6	25	16~35

Handle

把手

A mm	B mm	C mm	D mm	E mm
160.3	16	22	5.5	147
195.5	18	25	5.5	176
134	14.2	28	4.5	114
96	10.5	19.6	4.5	79.5



Handle



把手

A mm	B mm	C mm
279	45	20
76.2	45	20

Handle

把手

A mm	B mm	C mm	D mm	E mm
167	31.3	30	6.5	12.7



Wrench



扳手

A mm	B mm	C mm	D mm	E mm
147	20.7	16	104	8.5

Handle

把手

A mm	B mm	C mm	D mm	E mm
148.5	34.5	48.5	105	10.4



Stud Catch Hook

门碰钩

A mm	B mm	C mm	D mm
28	56	49.3	38



Deseen International

STAINLESS HARDWARE

Ball Catch

门碰

A mm	B mm	C mm	D mm	E mm
70	12.5	18	42.5	5.5
60	10	14.4	34	5
50	8.7	12.6	30	4
43	7.5	11	25	4



Step




支架

A mm	B mm	C mm	D mm
146	95	52	5

Release Pin with ball

钢珠销子

A mm	B mm	C mm	D mm	E mm
87	15	34	67	49



Folding Pad eye



连接环

A mm	B mm	C mm	D mm	E mm
46	45.2	41.5	12	6.3
64	62.5	57	11	6.2
78	69.2	63.2	11	6.3

Prop

浆叉

A mm	B mm	C mm	D mm
146	58	16	81

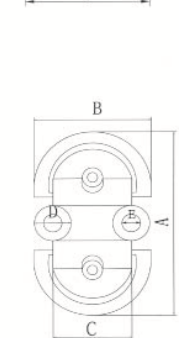

Folding Pad eye



连接环

A mm	B mm	C mm	D mm	E mm
79	45	26.3	11	6.8

Prop

浆叉



A mm	B mm	C mm	D mm	E mm	F mm
150	57	13	5	26	70



Prop

浆叉

A mm	B mm	C mm	D mm	E mm
137	M6	54.7	Φ5.7	Φ73



Fasteners

螺丝




A mm	B mm	C mm	D mm	E mm
26.8		21.7		M10
	28		25	M10

Deseen International STAINLESS HARDWARE

Black Nylon Head Screw

螺钉

A mm	B mm	C mm	D mm	E mm
36.5	28	13	17.5	1/4" -20



Cap



螺帽

A mm	B mm	C mm	D mm	E mm
26	24	20	M8	10
26	24	20	M10	10
26	24	20	M12	10

Pump Base

泵体

A mm	B mm	C mm
250	140	147
280	150	175
300	165	175



Cup Bracket



茶杯座

A mm	B mm	C mm	D mm
43.3	68	88	68.2

Connection

接头

A mm	B mm	C mm	D mm	E mm
3/4"	30	43	27	30
1"	36	43	26	36
1-1/4"	51	59	44	44
1-1/2"	59	61	46	52.5



Rod Holders


鱼杆座

A mm	B mm	C mm	D mm	E mm
61	83.5	92	42.6	90
61	83.5	220	42	80
61	83.5	215	42	90

Connection

油箱接头

A mm	B mm	C mm	D mm
53.6	38.1 (1-1/2")	101	68



Rod Holders



鱼杆座

A mm	B mm	C mm	D mm	E mm
285	47	110	92.5	90

Deseen International STAINLESS HARDWARE

Through Hull Outlets With Hose Connection 出水口

A mm	B mm	C mm	D mm	E mm
3/8"	57.5	36	7.5	25.5
1/2"	62	38.5	11.5	33
3/4"	73.2	47	17	42
1"	78	55.5	23	44
1-1/4"	83	66	29	45
1-1/2"	85	70.5	33	46
2"	99.5	85	47	52





Through Hull Outlets With Hose Connection 出水口

A mm	B mm	C mm	D mm	E mm
1/2"				
3/4"	80	46	18	57
1"	85.5	56	18	60
1-1/8"	100.5	59.5	28	62
1-1/4"				
1-1/2"				

Through Hull Outlets 出水口

A mm	B mm	C mm	D mm	E mm
3/8"	58	35.3	11.8	52.5
1/2"	62	39.3	15.3	58
3/4"	73	49	19	62
1"	80	54	25	71
1-1/4"	83	63	34	76
1-1/2"	85	70	38	79
2"	101	84	50.8	95
3"	127	117	76	120



Through Hull Outlets With Hose Connection 出水口



A mm	B mm	C mm	D mm	E mm
1/2"	62	39	13	41
3/4"	70	50	18.7	49
1"	76	53.5	24.4	53
1-1/4"	80	63	32.5	54
1-1/2"	82	71.5	39	61

Through Hull 排水阀

A mm	B mm	C mm	D mm	E mm
54.5	49	24.6	M20*1.5*14	4

Through Hull Outlets With Hose Connection 加长出水口

A mm	B mm	C mm	D mm	E mm
3/4"	101	47	19.5	55
1"	102	55	26	55
1-1/2"	102	70.5	39	55





Deck Filler 加油口

A mm	B mm	C mm	D mm
38.1 (1-1/2")	83	5.7	75
38.1 (1-1/2")	83	5.7	75
38.1 (1-1/2")	83.5	5.7	75
38.1 (1-1/2")	83	5.7	75
38.1 (1-1/2")	83	5.7	75
50.8 (2")	88	5.7	82
50.8 (2")	87	5.7	82
50.8 (2")	88	5.7	82



Deseen International STAINLESS HARDWARE

Deck Filler 加油口				
A mm	B mm	C mm	D mm	E mm
88	10	6	50.8	97



Deck Filler 加油口					
SIZE	A mm	B mm	C mm	D mm	E mm
2"	99	33	53	58	5



Deck Filler 加油口				
SIZE	A mm	B mm	C mm	D mm
1.5"	74	78	38.1	5.8
1.5"	74	78	38.1	5.8
1.5"	74	78	38.1	5.8
1.5"	74	78	38.1	5.8
2"	82	88	50.8	5.7
2"	82	88	50.8	5.7
2"	82	88	50.8	5.7



Tank Vent 漏水口				
SIZE	A mm	B mm	C mm	D mm
2"	87	87	50.8	5.5



Tank Vent 漏水口				
SIZE	A mm	B mm	C mm	D mm
1-1/4"	76	99	31.8	4

Deck Filler 加油口					
A mm	B mm	C mm	D mm	E mm	F mm
Φ74	Φ60	83.4	G1 1/4" -11	Φ6	Φ38.1
Φ74	Φ60	83.4	G1 1/4" -11	Φ6	Φ38.1
Φ74	Φ60	83.4	G1 1/4" -11	Φ6	Φ38.1
Φ74	Φ60	83.4	G1 1/4" -11	Φ6	Φ38.1
Φ74	Φ60	83.4	G1 1/4" -11	Φ6	Φ38.1



Tank Vent 漏水口			
A mm	B mm	C mm	D mm
76	60	Φ4	31.8

Hose Deck Fill 油箱口				
SIZE	A mm	B mm	C mm	D mm
1"	73	80.5	38	4.5
1"	73	80.5	38	4.5




Through Hull 排水阀				
A mm	B mm	C mm	D mm	E mm
63	16	35	6.6	3.5
45.6	24.6	25.5	6.5	3.5

Deseen International STAINLESS HARDWARE

Elbow Forms

弯头

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	62	62	120
1"	25.4			125
1 1/2"	25.4	66	66	110



Tees




三通

SIZE	A mm	B mm
1-1/2"	75	35.4
2"	82	47.8

Elbow

弯头

A mm	B mm	C mm	D mm	E mm
181	135	Φ56	140°	Φ65



Elbow Forms


弯头

SIZE	A mm	B mm	C mm
1-1/2"	75	75	35.4
2"	81.5	81.5	47.8

Elbow Forms

弯头

SIZE	A mm	B mm	C mm	D mm
1"	110	73	Φ22.2	90
1-1/4"	120	83	Φ28.8	90
1-1/2"	123	79	Φ35.4	90
2"	127	62	Φ47.8	90
2-1/2"	145	64	Φ60.1	90



Tees



三通

SIZE	A mm	B mm	C mm
1-1/2"	76	110	35.4
2"	82	116	47.8

Elbow

弯头

SIZE	A mm	B mm	C mm	D mm
1-1/4" 135°	105	135°	Φ28.9	25.4
1-1/2" 135°	110	135°	Φ35.4	25.4



Tees



弯头

SIZE	A mm	B mm	C mm	C mm
1-1/4" 105°	110	105°	Φ29.1	15
1-1/4" 118°	92	118°	Φ29.1	15
2-1/2" 120°	222.5	120°	Φ59	30

Elbow Forms

弯头

SIZE	A mm	B mm	C mm	D mm
1-1/2"	69	69	35.4	135
2"	69	69	47.8	135



Quik Connection



快速连接管

SIZE	A mm	B mm	C mm
1-1/2"	74	74	38.1
2"	93	93	50.8

Deseen International STAINLESS HARDWARE

Cross 四通

SIZE	A mm	B mm	C mm
1-1/2"	76	111	35.4
2"	83	117	47.8




Top Cap 滑帽

A mm	B mm	C mm	D	E mm
25.4	58	Φ8	1/4"-28	10

Cross 四通

SIZE	A mm	B mm	C mm
1-1/2"	110	110	35.4
2"	118	118	47.8






Top Cap 滑帽

A mm	B mm	C	D mm	E mm
66	Φ31.8	1/4"-28	Φ8.2	6.3

Table Fittings 咖啡桌配件

SIZE	A mm	B mm	C mm
1"	47.5	31.5	25.4
1-1/8"	48	38.5	28.28





Top Cap 滑帽

SIZE	A mm	B mm	C mm	D	E mm
7/8"	22.2	59	7	1/4"-28	6.5
1"	25.4	59	7	1/4"-28	6.5

L Type Base L型座

SIZE	A mm	B mm	C mm	D mm	E mm
RF130407-2	82	50	31	5.5	8




Eye End 特殊滑帽


A mm	B mm	C mm
48	21.5	18.5

Top Cap 滑帽

A mm	B mm	C mm	D	E mm
19	58	6.5	1/4"-28	7
22.2	58	6.8	1/4"-28	7
25.4	58	8	1/4"-28	7
25.4	57	7	1/4"-28	7
30	64	10	1/4"-28	9




Deseen International STAINLESS HARDWARE

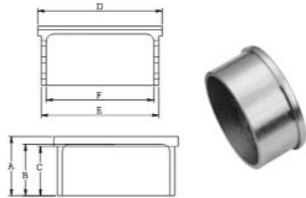


BALUSTRADE MAST TOP PLUG, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
24.00	20.80	20.00	50.50	47.60	43.00

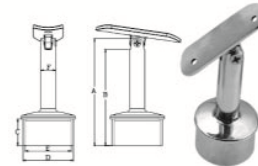


RAIL BRACKET 2" TUBE TOP MOUNT ADJUSTABLE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
104.00	90.40	25.70	47.20	43.70	18.80

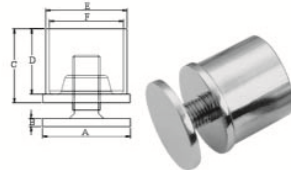


BASE INTERNAL ROUND TUBE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
51.00	4.80	43.00	38.00	47.20	43.00

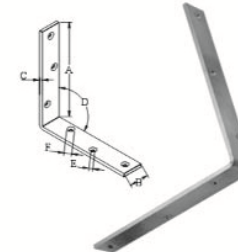


L-SHAPE PLATE, SS304 OR SS316. CB0L

SIZE	A mm	B mm	C mm	D mm	E mm	F mm
150*150*5	90L-150	30.00	5.00	90.00	5.00	10.00
150*150*5	90L-200	30.00	5.00	90.00	5.00	10.00
150*150*5	90L-250	30.00	5.00	90.00	5.00	10.00
150*150*5	90L-300	30.00	5.00	90.00	5.00	10.00

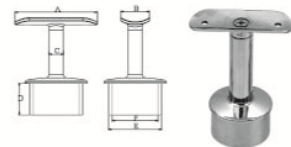


RAIL BRACKET 2" TUBE TOP MOUNT SQUARE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
80.40	28.10	19.00	24.80	47.20	43.50

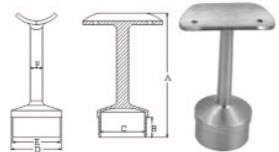

RAIL BRACKET TUBE TOP MOUNT SQUARE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
125.30	20.20	44.80	51.00	48.00	12.50

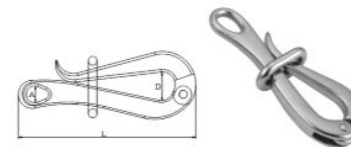


PELICAN HOOK(WITH LINK),SS304 OR SS316.

SIZE inch	A mm	D mm	L mm
4"	10.00	18.00	100.00
6"	13.00	22.00	150.00



TAIL BRACKET 2" TOP MOUNT, SS304 OR SS316


A mm	B mm	C mm	D mm	E mm
64.50	80.00	60.00	28.00	14.00



PELICAN HOOK,SS304 OR SS316.


SIZE	A mm	B mm	C mm	SWL kgs	BL kgs
M6	73.00	11.00	M6	300	1200
M8	97.50	14.00	M8	375	1500
M10	144.00	23.00	M10	875	3500
M12	144.00	23.00	M12	875	3500

Deseen International STAINLESS HARDWARE

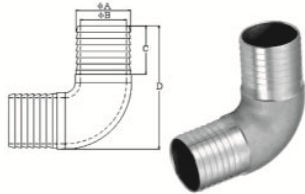


CGWT01
HOSE FITTING 90° , SS304 OR SS316

Φ A mm	Φ B mm	C mm	D mm
63.60	56.00	60.00	148.00




CGWT01
BALUSTRDE ROUND STYLE 90° , SS304 OR SS316

A mm	B mm	C mm	D mm
100.50	50.60	47.60	44.00

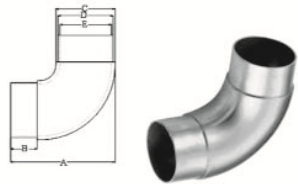


CGWT01
BALUSTRADE ROUND STYLE 90° , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
92.00	25.00	50.80	47.20	43.50

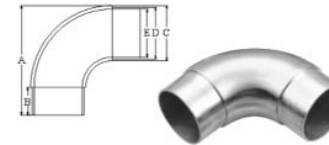


CGWT01
BALUSTRADE ROUND STYLE 90° , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
100.75	25.60	50.70	47.60	44.20




CGWT01
BALUSTRADE ANGLE STYLE 90° , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
83.00	26.00	50.80	47.20	43.00




CGWT01
BALUSTRADE ROUND STYLE 90° , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm	G mm
115.80	25.00	81.70	50.80	47.20	43.00	25.00



CGWT01
BALUSTRADE ANGLE STYLE 90° , SS304 OR SS316


A mm	B mm	C mm	D mm	E mm
85.70	24.80	51.00	47.60	44.20

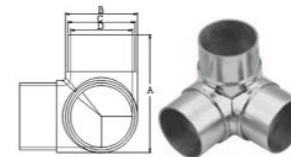

CGWT03
JOINER FLUSH 90° THREE WAY CORNER 2" , SS304 OR SS316


A mm	B mm	C mm	D mm
83.50	51.40	47.50	44.00

Deseen International STAINLESS HARDWARE

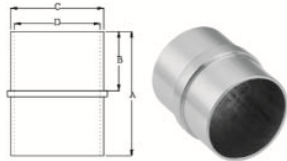


BALUSTRADE SOCKET, SS304 OR SS316

A mm	B mm	C mm	D mm
63.00	30.00	47.20	43.50

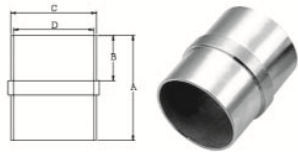


BALUSTRADE SOCKET, SS304 OR SS316

A mm	B mm	C mm	D mm
58.00	25.00	47.40	44.40

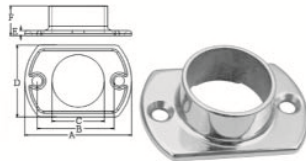


RECTANGULAR BASE 2" , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
105.00	80.00	51.20	70.00	5.00	30.00

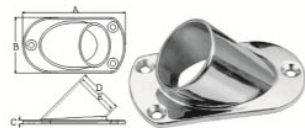


WELDABLE RECTANGULAR BASE 135° 2" , SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
130.00	70.00	5.00	56.50	51.00




ROUND BASE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm	G mm
104.00	43.00	38.00	47.20	41.00	10.00	41.00

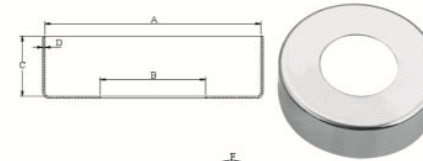


ROUND BASE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
89.00	62.20	50.50	56.50	23.00	5.00

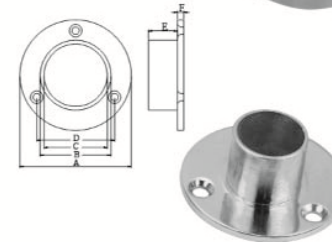

ROUND BASE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
50.80	25.00	47.20	43.50	R25.5	47.10



ROUND BASE, SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
47.40	22.15	47.70	42.70	25.25	43.50


Deseen International

STAINLESS HARDWARE

Hasp

搭扣

A mm	B mm	C mm	D mm
98	27	27	4.5



Hasp

搭扣


A mm	B mm	C mm	D mm
78	21.5	13.4	Φ5



Wster Ski Tow

支撑


A mm	B mm	C mm	D mm
100	Φ62	44	M10*60.5
121	Φ75.5	64	M10*80

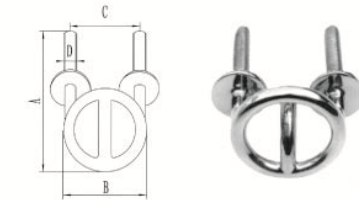

Rail End (end-in)

栏杆支座


SIZE	A mm	B mm	C mm
7/8"	109	19.05	Φ5.5*2



Rail End (end-in)

栏杆支座



SIZE	A mm	B mm	C mm
7/8"	130	22.22	Φ5.5*2



Rail End (end-in)

栏杆支座

SIZE	A mm	B mm	C mm
7/8"	170	49	23.8
1"	170	50	25.8



Bullet End Plug


子弹头

SIZE	A mm	B mm
7/8"	38	20

Cleat

吊艇羊角

A mm	B mm	C mm	D mm	E mm
200	M24	120	60	Φ10.5



Cleat

小吊艇羊角

A mm	B mm	C mm	D mm	E mm
99	79	30.4	M16*20	Φ11



Bow Chocks

提环

A mm	B mm	C mm	D mm	E mm
152.4	63.5	38.1	64	6
139.7	30	42	70.5	6





Deseen International STAINLESS HARDWARE

Top Slides

管夹

SIZE	A mm	B mm	C mm	D	E mm
7/8"	22.2	57	27	1/4"-20	7.3
1"	25.4	70.5	28	1/4"-20	8.5
1-1/4"	31.75	78	28.5	1/4"-20	6
3/4"	22.2	49.8	23.4	1/4"-20	7



Connection


连接管

A mm	B mm	C mm	D mm	E
32	38	25.4	38	180

Top Slides

扳手管夹

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	22.2	59	22	M4	7
1"	25.4	67	24.5	M5	7
1-1/4"	31.75	74.5	25	M6	7



Top Cap



连接帽

A mm	B mm
22	135
25	135
30	144

Top Slides

管夹

A mm	B mm
63.5	63.5
44.45	44.45



Deck Plate



圆盘

SIZE	A mm	B mm	C mm
3"	76.2	65	Φ8
4"	101.6	90	Φ5.7
5"	127.0	110	Φ5.7

Top Slides

管夹

A mm	B mm	C mm	D mm	E mm
82	50	25	20	M6*20
57.5	25	25	8	M6*20



Deck Plate



把手圆盘

SIZE	A mm	B mm	C mm	D mm	E mm
3"	76.2	37	13	93	8
4"	140.6	41	17	105.2	10
5"	127.0	35	15	107.5	8

Tube Connection

连接管

A mm	B mm	C mm	D mm	E mm
73	70	23.45	52	48



Hasp

搭扣



A mm	B mm	C mm	D mm	E mm
50	111	49.3	39.96	5

Deseen International

STAINLESS HARDWARE

Top Cap 特殊滑帽

A mm	B mm	C mm	D mm	E mm
87	31.6	25.4	Φ12	Φ5.4





Heavy Duty Top Slide 重型滑套

SIZE	A mm	B mm	C mm	D mm	E
1"	25.4	57	29.5	11	5/16" -18

Top Slides 滑套

A mm	B mm	C mm	D mm
49.5	32.5	26.7	7/8"





Top Slides 滑套

A mm	B mm	C mm	D mm	E mm
19.8	19.4	17	8.5	12.7

Bracket 底座

A mm	B mm	C mm	D mm	E mm
59.7	28.5	30.9	Φ5	Φ5.5





Top Slides 滑套

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	22.2	60	30	7.5	1-4"-20
1"	25.4	62	31	8	1-4"-20
1-1/4"	31.75	62	31	8	1-4"-20

Top Cap 球滑帽

SIZE	A mm	B mm	C mm	D mm
7/8"	62.5	Φ27	Φ22.3	1/4" -28
1"	62.5	Φ30.5	Φ25.4	1/4" -28





Top Slides 滑套

SIZE	A mm	B mm	C mm	D	E
3/4"	19	22.5	44	1/4" -20	6.5
7/8"	22.2	51	28	1/4" -20	8
1"	25.4	54	28.5	1/4" -20	8
1-1/4"	31.75	66	26.5	1/4" -20	8

Top Cap 球滑帽

SIZE	A mm	B mm	C mm	D mm
7/8"	22.2	14	27	1/4" -28



Top Slides 管夹



SIZE	A mm	B mm	C mm	D	E
7/8"	22.2	71	30	1/4"-20	1/4"-28
1"	25.4	74.5	31	1/4"-20	1/4"-28
1-1/4"	31.75	84	32	1/4"-20	1/4"-28

Deseen International

STAINLESS HARDWARE

Hinge 铰链

A mm	B mm	C mm	D mm	E mm
90.6	30	33.5	Φ5.2	7.8





Hatch Hinge 重铰链

A mm	B mm	C mm	D mm
76.4	40	67	Φ5.5
83.82(3-1/4")	76.2(3")	32	Φ5.5*8

Hinge 铰链

A mm	B mm	C mm	D mm	E mm
90.6	30	33.5	Φ5.2	29*10





Hinge 开口单铰链

A mm	B mm	C mm	D mm
99.5	37.7	Φ4.5	11.6

Hinge 铰链

A mm	B mm	C mm	D mm	E mm
81.5	32.2	34	Φ5.2	7




Hinge 铰链

A mm	B mm	C mm	D mm	E mm
163	57	6	52	6
177	45	6	53	6

限位件

A mm	B mm	C mm	D mm
61.5	1"	40	24
61.5	1"	40	24




Hinge 铰链

A mm	B mm	C mm	D mm	E mm
163	57	6	52	6
177	60	6	53	6


Ladder Padeyes 门鼻

A mm	B mm	C mm	D mm	E mm
80	43	5	54	6.2



Hatch Hinge 重铰链

A mm	B mm	C mm	D mm	E mm
76.2(3")	63.5(2-1/2")	33.5	Φ5.5*7	



Hinge 铰链

A mm	B mm	C mm	D mm	E mm
117	61.5	85	40	8

Deseen International STAINLESS HARDWARE

Hinge

铰链


A mm	B mm	C mm	D mm	E mm
75	70	47	8	Φ6.5



Hinge

铰链

A mm	B mm	C mm	D mm
100	40	6	3.1



Hinge

暗铰链


A mm	B mm	C mm	D mm
37.9	44.5	Φ4.5	4.9
46	70	Φ4.8	7



Lock

门插销


A mm	B mm	C mm	D mm
93.5	39	3.4	Φ5



Lock

锁扣



A mm	B mm	C mm	D mm
112.71	30.6	4	29



Hinge

桌面铰链

A mm	B mm	C mm	D mm
99.95	61.2	19.05	M6



Hinge

合页



A mm	B mm	C mm	D mm
127(5")	37(1-1/2")	2	Φ5



Hinge

铰链


A mm	B mm	C mm	D mm
96.8	37.2	2.9	38.5



Cable Fixation

U型压块


A mm	B mm	C mm	D mm
94	50.5	35	Φ5



Cable Fixation Left And Right

左右压块


A mm	B mm	C mm	D mm	E mm
43	26.5	90	35	Φ5.2
43	26.5	90	35	Φ5.2



Cable Fixation

压块

A mm	B mm	C mm	D mm	E mm
34	19	40	2	Φ5
40	24	50.8	2	Φ5



Cable Fixation

压块


A mm	B mm	C mm	D mm	E mm
56.5	33	81	2	Φ5

Deseen International

STAINLESS HARDWARE

Hinge 合页

A mm	B mm	C mm	D mm	E mm
121	39.5	3	31	Φ6.2





Hinge 合页

A mm	B mm	C mm	D mm	E mm
100	42.5	20	Φ6	Φ4

Hinge 合页

A mm	B mm	C mm	D mm	E mm
40	39.7	6.1	9	23.3

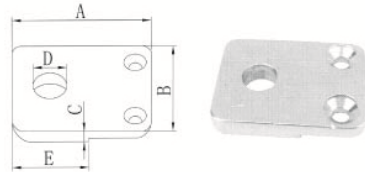

Hinge 合页

A mm	B mm	C mm	D mm
50	30	3	16.5

Hinge 合页

A mm	B mm	C mm	D mm	E mm
64.7	25	2	Φ6	Φ3.5





Hinge 合页

A mm	B mm	C mm	D mm	E mm
90	25.5	5	23.4	9.3

Hinge 弧面铰链

A mm	B mm	C mm	D mm
65	40	8	31

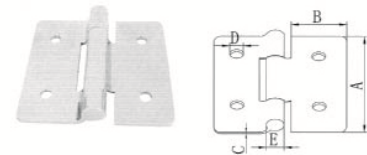



Hinge 合页

A mm	B mm	C mm	D mm	E mm
82	34	3	7	13.6

Hinge 合页

A mm	B mm	C mm	D mm	E mm
80	40	8	30	60





Hinge 合页

A mm	B mm	C mm	D mm	E mm
27	64	3.5	49	M6

Hinge 合页

A mm	B mm	C mm	D mm	E mm
Φ38.1	20	20	3	8-32

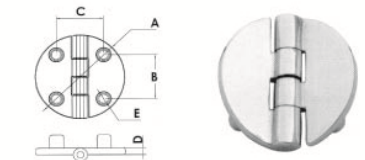



Hinge 合页

A mm	B mm	C mm	D mm	E mm
113	40.6	34.5	6	8

Deseen International STAINLESS HARDWARE

Door Hinge 合页

A mm	B mm	C mm	D mm	E mm
76.2(3")	38.1 (1-1/2")	4.5	Φ5.5	26.5
76.2(3")	38.1 (1-1/2")	4.5	Φ5.5	32

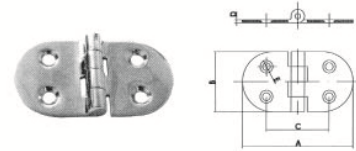


Hinge 合页

A mm	B mm	C mm	D mm	E mm
74	40	42	2	Φ5.2

Door Hinge 合页

A mm	B mm	C mm	D mm	E mm
76.2(3")	38.1(1-1/2")	50.5	Φ4.5	Φ5.5





Hinge 合页

A mm	B mm	C mm	D mm	E mm
43	37.8	2.2	5.5	65

Hinge 合页

A mm	B mm	C mm	D mm
101.6(4")	38.1(1-1/2")	4.6	Φ5.5





Hinge 合页

A mm	B mm	C mm	D mm
81(3-1/4")	37.6(1-1/2")	3	Φ5.5

Hinge 合页

A mm	B mm	C mm	D mm
56.2(2-1/4")	38.1(1-1/2")	5	Φ5.5




Hinge T型铰链

A mm	B mm	C mm	D mm	E mm
203.2	98	Φ5.2	Φ10	5.6

Hinge 合页

A mm	B mm	C mm	D mm
112(4-1/2")	37.6(1-1/2")	2	Φ5.7





Hinge 合页

A mm	B mm	C mm	D mm
156(6")	28(1-1/8")	5	Φ5

Hinge 合页

A mm	B mm	C mm	D mm
143.6(5-9/16")	37.6(1-1/2")	2	Φ5.7



Hinge 合页



A mm	B mm	C mm	D mm
156(6")	40(1-1/2")	3	5.5

Deseen International

STAINLESS HARDWARE

Tank Vent 漏水口

A mm	B mm	C mm	D mm	E mm
36	62	21	27	29





Air Vent 透气口

A mm	B mm	C mm	D
104	83	62	G1"
80	65.5	46	3/4"

Air Vent 油箱透气口

A mm	B mm	C mm	D mm	E mm
67	46	66	28	Φ16





Air Vent 透气口

A mm	B mm	C mm	D mm	E mm
64.5	92	16	16	5

Air Vent 油箱透气口

A mm	B mm	C mm	D mm	E mm
66	68	M18*1.5	Φ16	Φ9





Barracuda final 杯架

A mm	B mm	C mm	D mm	E mm
Φ80	8	96	45	M8

Air Vent 油箱透气口

A mm	B mm	C mm	D mm
67	46	M18*1.5	16




Funnel 漏斗

A mm	B mm	C mm	D mm	E mm
74.2	52	47	25.1	2.9

Air Vent 油箱透气口

A mm	B mm	C mm	D mm	E mm
84	25.4	M18*1.5	16	12



Marine Screw 螺丝


A mm	B mm	C mm	D mm	E mm
47	26.4	5.8	24.5	12

Deseen International STAINLESS HARDWARE

Deck Hinge

山型座


A mm	B mm	C mm	D mm	E mm
94.3	52.6	48.5	10	27.3



Deck Hinge

山型座



A mm	B mm	C mm	D mm	E mm
61	80.6	44	5	10



Hinge

铰链


A mm	B mm	C mm	D mm	E mm
99.3	42	4.3	68.3	50



Special Top Fitting

异型滑套



A mm	B mm	C mm	D mm	E mm
93	28.8	15.3	10.5	11



Support

支架

A mm	B mm	C mm	D mm	E mm
52.2	20.2	32	8.6	5.7



Rope Clip


卡扣

A mm	B mm	C mm	D mm
41.7	30	6	41.8
41.7	30	6	41.8

Padeyes

连接器


A mm	B mm	C mm	D mm	E mm
88	19	62.5	26	6
72	14	52	21	4



Stanchion Angle

转向支架


A mm	B mm	C mm	D mm	E mm
100	55.5	127	5	6±0.5



Connection

连接弯管

A mm	B mm	C mm	D mm
35.56	100	155	Φ5.5
39.5	129	146.6	Φ5.5






Deseen International

STAINLESS HARDWARE

Deck Hinge Angle Base 销式斜山型座

A mm	B mm	C mm	D mm	E mm
52.4	17.46	34	Φ5.5*2	8





Deck Hinge Angle Base 栓式斜山型座

A mm	B mm	C mm	D mm	E mm
52.38	17.46	34	1/4" -20	Φ5.5*2

Deck Hinge 90° 栓式正山型座

A mm	B mm	C mm	D mm	E mm
52.4	17.46	36.7	1/4" -20	8





Heavy Duty Dety Hinge 90° 重山型座

A mm	B mm	C mm	D mm	E mm
52.38	17.46	10.4	5/16"-18	Φ7.2

Deck Hinge 90° 栓式正山型座

SIZE	A mm	B mm	C mm	D mm	E mm
7/8"	57.15	22.22	38.5	1/4-20	5.5*2
1"	57.15	25.4		1/4-20	
7/8"	57.15	22.22	38.5	6*40mm	5.5*2
1"	57.15	25.4		6*40mm	




Deck Hinge 山型座

A mm	B mm	C mm	D mm	E mm
40.5	60	42.5	6.3	6.3±0.1

Deck Hinge 90° 销式正山型座

A mm	B mm	C mm	D mm	E mm
52.38	17.46	37	Φ6*40	8





Deck Hinge 山型座

A mm	B mm	C mm	D mm	E mm
40.5	60	39	6.2	6.8±0.5

Rail Hinge 山型座

A mm	B mm	C mm	D mm
76.2	40.64	32(1-1/4")	Φ6
76.2	40.64	32(1-1/4")	Φ6



Deck Hinge 山型座

A mm	B mm	C mm	D mm	E mm
84.5	54.5	32	8.2	8.5±0.1


Deseen International

STAINLESS HARDWARE

Turning Lock Lift Handle

锁体

A mm	B mm
61.5	36



Plug



船丝堵

A mm	B mm	C mm	D mm	E mm
50.3	8.5	43.5	4.8	24

Turning Lock Lift Handle

锁体

A mm	B mm
61.5	36



Fixed Collar



固定环夹

A mm	B mm	C mm	D mm
40	20	25	45

Turning Lock Lift Handle

锁体

A mm	B mm	C mm	D mm
61	23	41	65



Fixed Collar



固定环夹

A mm	B mm	C mm	D mm
40	Φ20	27.5	12.5

Turning Lock Lift Handle

锁体

A mm	B mm	C mm	D mm
72	Φ60	66	M8



Intake Strainers

过滤器

A mm	B mm	C mm	D mm
3/8"	46.4	94	79
1/2"	48	99	90.4
3/4"	57	106	104.5
1"	60	106.5	105
1-1/4"	64.4	103	117
1-1/2"	70.5	113	132.5
2"	86	154	126
2-1/2"	112	156	200
3"	135	160	290



Deseen International

STAINLESS HARDWARE

Cleats Inox For Ropes

夹绳器

A mm	B mm	C mm	D mm	E mm
68	18.5	7	M5	15.5



Turning Lock Lift Handle



地板锁

A mm	B mm	C mm	D mm	E mm
78	66	107.5	88	Φ5

Turning Lock Handle

地板锁

A mm	B mm	C mm	D mm
89	76	84	1/2"-13



Turning Lock Lift Handle



锁体

A mm	B mm	C mm	D mm
60	82	6	M8

Turning Lock Handle

地板锁

A mm	B mm	C mm	D mm
89	76	88	1/2"-13



Turning Lock Lift Handle



锁体

A mm	B mm	C mm
82	87	Φ60

Cover Lock

地板锁

A mm	B mm	C mm	D mm
Φ99.3	126	Φ5	M10



Turning Lock Lift Handle



锁体

A mm	B mm	C mm	D mm
50	60.4	11	7.5

Turning Lock Lift Handle

地板锁

A mm	B mm	C mm	D mm	E mm
66.67	79.37	111.12	12	5.3



Turning Lock Lift Handle


锁体

A mm	B mm	C mm
106	82	137.5

Turning Lock Lift Handle

地板锁

A mm	B mm	C mm	D mm	E mm
96	76	125	M12	5.3



Deseen International

STAINLESS HARDWARE

Stanchion

支架

A mm	B mm	C mm	D mm
108.4	50.8	50.8	6




Table Bracket



折叠支撑

A mm	B mm	C mm	D mm	E mm
300	158.3	157	79	22

Stanchion

支架

SIZE	A mm	B mm	C mm	D mm	E mm
(1-1/2")	87.5	63.5	90	4.5	38.1
(2")	87.5	63.5	90	4.5	50.8



Rader Bracket



雷达支架

A mm	B mm	C mm	D mm
520	127	Φ51	177

Stanchion

支架

A mm	B mm	C mm	D mm	E mm
63	12	83	40	31.8



Rader Bracket



雷达底座

A mm	B mm	C mm	D mm	E mm
300	136.65	336	Φ13	126.65

Stanchion

支架

A mm	B mm	C mm	D mm	E mm
86.5	23	Φ7	62.3	62.4



Nose Handle



鼻子把手

A mm	B mm	C mm	D mm
183.99	116.46	21.77	156.22°

Flexible Bracket

伸缩支撑

A mm	B mm	C mm	D mm	E mm
185	20	16	51	54.3



Quick Joint


快速接头

A mm	B mm	C mm	D mm
97.6	Φ76.6	44	Φ10.5

Table Bracket

折叠支撑

A mm	B mm	C mm	D mm	E mm
304	167	152	80	90



Quick Joint

快速接头


A mm	B mm	C mm	D mm	E mm
92	36	16	18.5	M12

Deseen International

STAINLESS HARDWARE


Connect Base 连接件底座

A mm	B mm	C mm
153	39	38




Connect Base 连接件底座

A mm	B mm	C mm	D mm
101.5	40.2	35.6	5

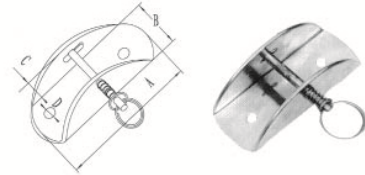


Lift Ring 地板扣

A mm	B mm	C mm	D mm
38.1(1-1/2")	38.1(1-1/2")	Φ4.5	3

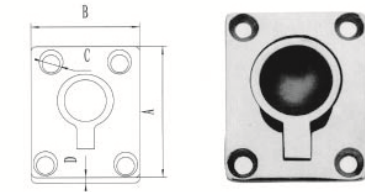



Lift Ring 地板扣

A mm	B mm	C mm	D mm
62(2-1/2")	44(1-3/4")	Φ4.5	5
38	48	Φ4.5	2.6

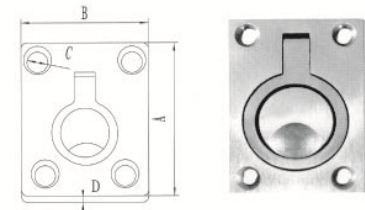


Lift Ring 地板扣

A mm	B mm	C mm	D mm
44(1-3/4")	38(1-1/2")	Φ4.5	2

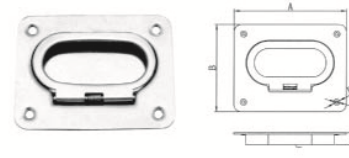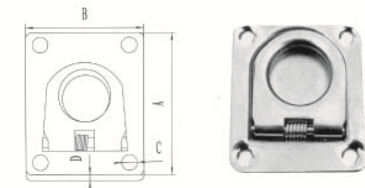


Hinge 支架

A mm	B mm	C mm	D mm	E mm
75	58	8	Φ4	Φ8.2

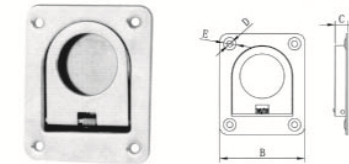


Lift Ring 地板扣

A mm	B mm	C mm	D mm	E mm
66	56	8.3	Φ4	Φ7

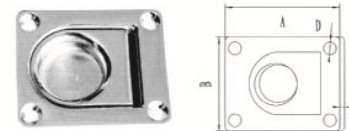


Lift Ring 地板扣

A mm	B mm	C mm	D mm
65	55	2.5	4.5

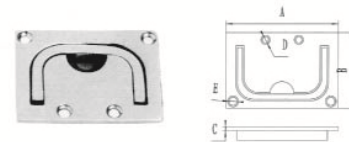

Lift Ring 舱盖铰链

A mm	B mm	C mm	D mm	E mm
76(3")	57.5(2-1/4")	3	5	6

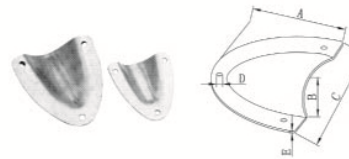

Hinge 铰链

A mm	B mm	C mm	D mm	E mm
43.3	10.5	42.4	Φ3	0.7
58	12.8	55.1	Φ4.1	0.8

Deseen International STAINLESS HARDWARE

Hinge 合页

A mm	B mm	C mm	D mm
202	69	5	Φ10.5*3



Strap Hinge 合页

A mm	B mm	C mm	D mm
101.6(4")	25.4(1")	5	Φ5.5




Hinge 合页

A mm	B mm	C mm	D mm
122.5	50.3	2.85	Φ6




Hinge 合页

A mm	B mm	C mm	D mm
95(4")	75(3")	3.5	Φ6.7





Hinge 合页

A mm	B mm	C mm	D mm
101.6(4")	101.6(4")	7	Φ6.5

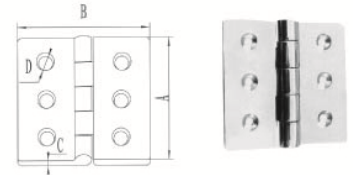

Hinge 合页

A mm	B mm	C mm	D mm	E mm
68	25	45	1/4"-20	6.5

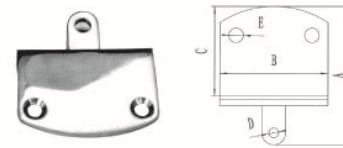

Hinge 铰链

A mm	B mm	C mm	D mm	E mm
79.5	89.5	58	7	8


Connection 不锈钢连接桥

A mm	B mm	C mm	D mm
48	14.5	9	6




Hinge 圆铰链

A mm	B mm	C mm	D mm	E mm
Φ58	R28	4.6	53	Φ4.3

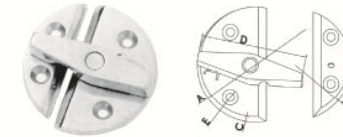


Hinge 圆铰链

A mm	B mm
43	4

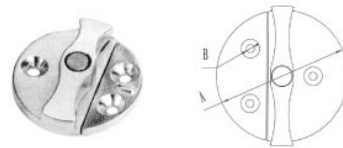

Hinge 合页

A mm	B mm	C mm	D mm
96(4")	75.5(3")	4.5	6.5



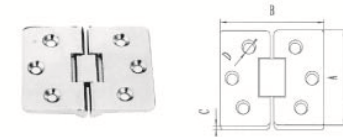


Deseen International

STAINLESS HARDWARE

Hinge 合页

A mm	B mm	C mm	D mm
80	63	3	4





Hinge 合页

A mm	B mm	C mm	D mm
74(3")	38.5(1-1/2")	3	9.5

Hinge 合页

A mm	B mm	C mm	D mm
205	34	112	5.5






Hinge 合页

A mm	B mm	C mm	D mm
39(1-1/2")	39(1-1/2")	5	Φ5

Hinge 合页

A mm	B mm	C mm	D mm
152	82	48	Φ5.5





Hinge 合页

A mm	B mm	C mm	D mm	E mm
144.6	64	4	99	7

Hinge 合页

A mm	B mm	C mm	D mm
156	59	57.5	Φ5.5





Hinge 合页

A mm	B mm	C mm	D mm	E mm
112.4	40	3.2	Φ8.5	Φ6.2
132.5	40	3.2	Φ8.5	Φ6.2

Hinge 合页

A mm	B mm	C mm	D mm
63.5(2-1/2")	63.5(2-1/2")	5	Φ5.5





Hinge 合页

A mm	B mm	C mm	D mm	E mm
153.5	39.8	3	Φ8.2	Φ6.8

Hinge 合页

A mm	B mm	C mm	D mm
50.8(2")	50.8(2")	5	Φ6.5





Deseen International

STAINLESS HARDWARE

Hinge Side Mounted

甲板铰链





A mm	B mm	C mm	D mm	E mm
50.8	22.22	16.5	1/4"-20	Φ5.5*2
50.8	19.05	16.5	1/4"-20	Φ5.5*2



Deck Hinge Plate

甲板铰链





A mm	B mm	C mm	D mm
74.61	47.6	32	Φ7*4



Removable Pin Hinge

合页



A mm	B mm	C mm	D mm
41.2(1-5/8")	41.2(1-5/8")	2	Φ4.5
50.8 (2")	41.2(1-5/8")	2	Φ4.5
50.8 (2")	50.8 (2")	2.5	Φ5



Removable Pin Hinge

合页




A mm	B mm	C mm	D mm
63.5(2-1/2")	50.8(2")	2.5	Φ5
63.5(2-1/2")	63.5(2-1/2")	3	Φ5.5
76.2 (3")	76.2 (3")	3	Φ5.5



Fast Pin Butt Hinge

合页

A mm	B mm	C mm	D mm
41.2(1-5/8")	41.2(1-5/8")	2	Φ4.5
50.8 (2")	41.2(1-5/8")	2	Φ4.5
50.8 (2")	50.8 (2")	2.5	Φ4.5



Fast Pin Butt Hinge

合页

A mm	B mm	C mm	D mm
63.5(2-1/2")	50.8(2")	2.5	Φ5
63.5(2-1/2")	63.5(2-1/2")	3	Φ5
76.2 (3")	41.2(1-5/8")	3	Φ5
76.2 (3")	50.8(2")	3	Φ5.5
76.2 (3")	76.2 (3")	3	Φ5.5

Butt Hinge

合页

A mm	B mm	C mm	D mm
38.1(1-1/2")	38.1(1-1/2")	4.5	Φ5.5
50.8 (2")	50.8 (2")	4.5	Φ5.5

Butt Hinge

合页

A mm	B mm	C mm	D mm
52 (2")	41.2(1-5/8")	4.5	Φ7

Door Hinge

合页

A mm	B mm	C mm	D mm
74.6 (3")	38.5(1-1/2")	5	Φ5.5


Deseen International

STAINLESS HARDWARE

Rod Holders

鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
270	270	50.8	112	89	45
270	270	50.8	112	87	45



Rod Holders



鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
BC-192543	210	113	83	50.8	60

Rod Holders

鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
0050	88	53	160	42	Φ6.8



Rod Holders



鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
BC-192543A	113.5	83.5	50.8	200	90

Rod Holders

万向旋转鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
0052	55	220	340	50.8	54



Rod Holders



鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
BC-3	61	83.5	253	41	90

Rod Holders

旋转鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
0052A	360	50.8	290	67	28.1



Rod Holders




鱼杆座

SIZE	A mm	B mm	C mm
BC-Y	110	52	25.4

Rod Holders

鱼杆座

SIZE	A mm	B mm	C mm	D mm	E mm
BC-42	98	80	Φ41.8	Φ5.1	Φ9.4



Rod Holder Rack

鱼竿座插头

SIZE	A mm	B mm	C mm
BC-7	190	46	110

Coupling Hook

连接钩



SIZE	A mm	B mm	C mm	D mm	E mm
L-89	53	38.5	2.5	Φ7.64	6

Deseen International

STAINLESS HARDWARE

Hook 小钩子

A mm	B mm	C mm	D mm
0619A	10.7	Φ8	8




Hook 单挂钩

A mm	B mm	C mm	D mm
41.1	50.6	18.4	Φ4

Pad Eye Plate 固定夹

A mm	B mm	C mm	D mm	E mm
92	15	3.1	Φ6.7	18.6





Pad Eye 骆驼背

A mm	B mm	C mm	D mm
67.5	18.5	M4	Φ6.7

Fixed Collar 固定环

A mm	B mm	C mm	D mm
42	18.7	1"	32.4

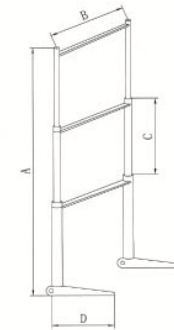


Telescopic Ladder 伸缩梯

A mm	B mm	C mm	D mm
870	270	275	180



Hook 挂钩

A mm	B mm	C mm	D mm
66	58	Φ6	30
96	73	Φ8	30



Hook 双挂钩

A mm	B mm	C mm	D mm	E mm
63	27.25	22	Φ4	Φ7.5



Step Ladder 一节梯


A mm	B mm	C mm	D mm	E mm
330	210	Φ22	100	95

Deseen International STAINLESS HARDWARE

Deck Hinge

山型座


A mm	B mm	C mm	D mm	E mm
94.3	52.6	48.5	10	27.3



Deck Hinge

山型座



A mm	B mm	C mm	D mm	E mm
61	80.6	44	5	10



Hinge

铰链


A mm	B mm	C mm	D mm	E mm
99.3	42	4.3	68.3	50



Special Top Fitting

异型滑套



A mm	B mm	C mm	D mm	E mm
93	28.8	15.3	10.5	11



Support

支架

A mm	B mm	C mm	D mm	E mm
52.2	20.2	32	8.6	5.7



Rope Clip


卡扣

A mm	B mm	C mm	D mm
41.7	30	6	41.8
41.7	30	6	41.8

Padeyes

连接器



A mm	B mm	C mm	D mm	E mm
88	19	62.5	26	6
72	14	52	21	4



Stanchion Angle

转向支架


A mm	B mm	C mm	D mm	E mm
100	55.5	127	5	6±0.5



Connection


连接弯管

A mm	B mm	C mm	D mm
35.56	100	155	Φ5.5
39.5	129	146.6	Φ5.5



Deseen International STAINLESS HARDWARE

EYE WOODEN SCREW, SS304 OR SS316.

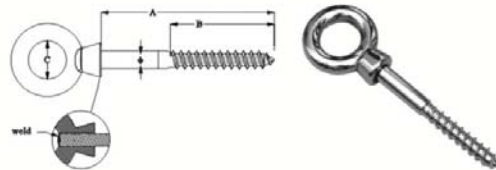


SIZE	A mm	B mm	C mm
M6 × 40	40.00	24.00	14.00
M6 × 60	60.00	36.00	14.00
M6 × 80	80.00	48.00	14.00
M6 × 100	100.00	60.00	14.00
M8 × 60	60.00	36.00	18.00
M8 × 80	80.00	48.00	18.00
M8 × 100	100.00	60.00	18.00
M10 × 60	60.00	36.00	22.00
M10 × 80	80.00	48.00	22.00
M10 × 100	100.00	60.00	22.00
M10 × 120	120.00	72.00	22.00
M12 × 80	80.00	48.00	27.00
M12 × 100	100.00	60.00	27.00
M12 × 120	120.00	72.00	27.00
M12 × 140	140.00	84.00	27.00
M12 × 160	160.00	96.00	27.00

LAG EYE SCREW, SS304 OR SS316.




SIZE	φ mm	A mm	B mm
M6 × 65	5.76	100.00	14.00
M6 × 100	7.80	110.00	20.00
M8 × 85	9.25	125.00	30.00
M8 × 110	5.76	65.00	16.00
M10 × 125	7.80	85.00	20.00

ALUMINIUM STOP BUTTONS 美式圆形铝套




SIZE	A(mm) INNER DIA.	D(mm) OUTER DIA.	L(mm) LENGTH	WEIGHT Kgs/1000Pcs
3/64"	1.54	4.40	4.16	0.236
1/16"	1.92	6.35	4.16	0.278
5/64"	2.38	6.35	4.16	0.282
3/32"	2.90	8.72	7.95	1.05
1/8"	3.86	8.72	7.95	0.949
5/32"	4.70	11.11	8.73	1.76
3/16"	5.54	11.11	8.73	1.69
7/32"	6.35	11.11	8.73	1.50
1/4"	7.20	17.46	17.46	9.07
5/16"	9.53	17.46	17.46	7.46
3/8"	11.13	17.46	17.46	6.58

ALUMINIUM FERRULES JIS TYPE 日式外椭圆内八字形铝套

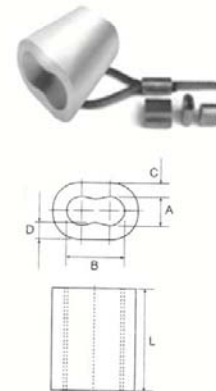

FERRULE CODE	A mm	B mm	C mm	D mm	L mm	WEIGHT Kgs/1000Pcs
6	7	13.8	3.2	3.8	24	10
7	8.2	16.2	3.6	4.25	26	14
8	9.4	18.6	4	4.7	32	22
9	10.22	20.7	4.3	5.52	36	29
10	11.60	23	4.5	5.5	40	37
12	13.62	27.6	5.3	6.92	48	63
14	15.89	32.2	5.53	7.42	56	88
16	18.16	36.8	6.32	8.48	64	130
18	20.43	41.4	7.11	9.54	72	186
20	23.1	46	7.7	9.2	80	245
22	25.4	50.6	8.3	10	88	319
24	27.8	55.3	8.9	10.9	96	408
26	29.9	59.8	10.7	12.9	104	581
28	32.2	64.4	11.3	13.6	112	714
30	34.5	69	11.8	14.3	120	859
32	36.8	73.6	12.5	15.2	128	1026

Deseen International STAINLESS HARDWARE




快速接头F

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
A		14	21	24	28.8	36	45	56.5	75.8	98	150
B		32	32	36.6	45.5	53.4	63	75.7	91.5	119.5	176
C		40	40	48	56	58	63	70	77	79	86
D		32.5	32.5	39	48	56	67	83	99.6	124	182
L		57	57	72	80	82	88	100	100.5	115	130




快速接头DC

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
	mm	15	20	25	32	40	50	65	80	100	150
A		110	110	123	179	186.5	197.5	208.5	232	260	356
B		53	53	60	81.3	88.5	99.5	110.5	131	159	220
C		42	42	47	58	66.5	78	92	109	138	199
D		7.5	7.5	12	14	16	18	18	23	24	30
L		36	36	43	51	52	59	64	65	70	82




快速接头DP

SIZE	INCH	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"
	mm	15	20	25	32	40	50	65	80	100	150
A		32	32	36.6	45.5	53.4	63	75.7	91.5	119.5	176
B		11	11	10	14	16	17	18	20	20	26
L		26.5	26.5	34	41	44	48	50	53	56	64

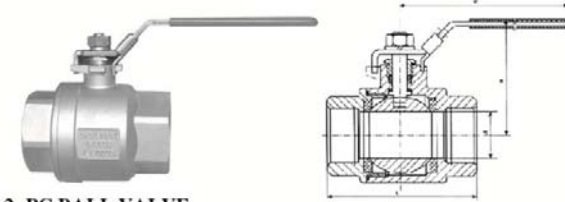

二片式球阀 2-PC BALL VALVE

SIZE	D	L	H	E	重量WT(g)
1/4"	11.6	55	50	100	225
3/8"	12.7	55	50	100	225
1/2"	15	65	60	130	390
3/4"	20	75	64	130	502
1"	25	88	71	165	850
1 1/4"	32	102	78	165	1502
1 1/2"	38	110	86	190	2020
2"	50	125	98	190	3625
2 1/2"	65	162	130	250	4700
3"	80	189	148	250	7700
4"	100	260	180	280	14850

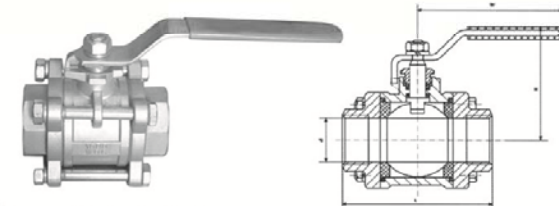

三片式球阀 3-PC BALL VALVE

SIZE	D	L	H	E	重量WT(g)
1/4"	11.6	68	100	100	400
3/8"	12.7	68	100	100	405
1/2"	15	72	130	130	640
3/4"	20	85	130	130	890
1"	25	90	165	165	1160
1 1/4"	32	112	165	165	2195
1 1/2"	38	120	190	190	2940
2"	50	145	190	190	4865
2 1/2"	65	185	250	250	7000
3"	80	210	250	250	10700
4"	100	268	280	280	19350

Deseen International STAINLESS HARDWARE



生产车间 WORK SHOP



Bracker

A mm	B mm	C mm	D mm	E mm
43	78	1/4-20	79.5	57.3


支架



Prop

A mm	B mm	C mm	D mm
Φ76	85	Φ30.7	Φ7.5

浆叉



Table

A mm	B mm	C mm	D mm
653	641	300	Φ8.5

桌子



Body For Light

A mm	B mm	C mm	D mm
170	105	10	64

灯罩

